

TEM

On | Off and everything in between



2025

TEM

MODUL



44

LOGIQ



172

ekonomik



222

fontana



260



TEM

On | Off and everything in between



Smo proizvajalec stikal in vtičnic, ki svojim uporabnikom zagotavlja pozitivno in enostavno izkušnjo, hkrati pa s preprosto vgradnjo in uporabo izdelkov, širokim izborom barv in materialov zadovolji še tako zahtevne želje vsakega uporabnika in prostora.

We are a manufacturer of switches and sockets offering a positive and easy user experience while satisfying the most demanding needs of every user and space with products that are easy to install and use, as well as a wide range of colours and materials.

TEM

Dobrodošli v družini MODUL

Welcome to the MODUL family

Ambientu vdahnite osebno noto in vaš slog poudarite s stikali in vtičnicami iz družine MODUL.

Give your ambience a personal touch and show off your style with switches and sockets from MODUL family.

odkrivamo nove poglede
discovering new insights



MODUL
LINE



MODUL
SOFT



MODUL
PURE



MODUL
EDGE

MODUL

Izberi OBLIKO
Select your DESIGN

Izberi BARVO
Select your COLOUR

1

2

MODUL

LINE



MODUL

SOFT




MODUL

PURE




MODUL

EDGE

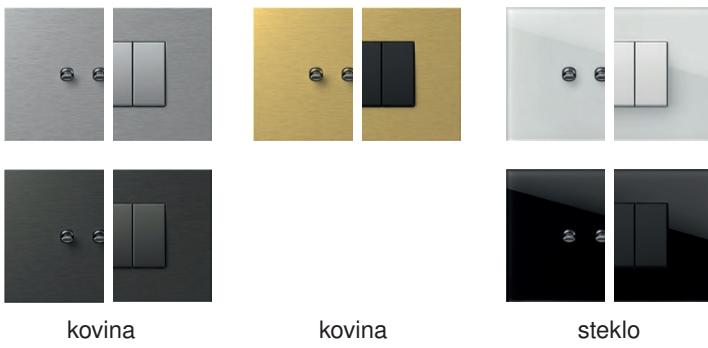


Sestavi KONFIGURACIJO
Create your CONFIGURATION

3

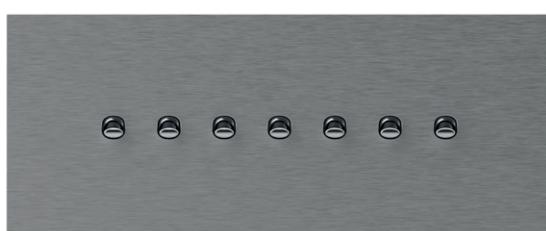


Pomagaj si z APLIKACIJO
Use the APP

4

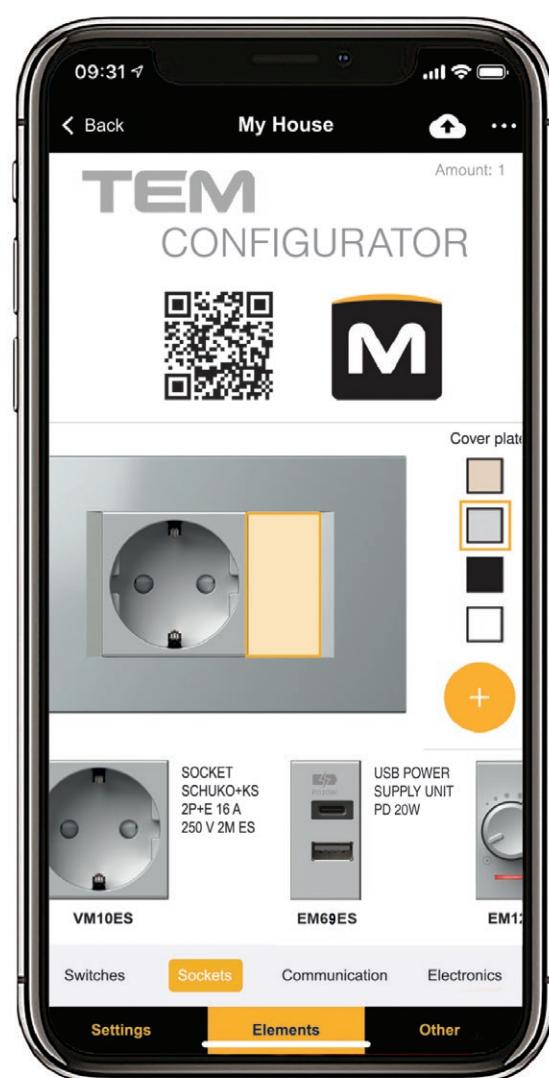

MODUL


LINE

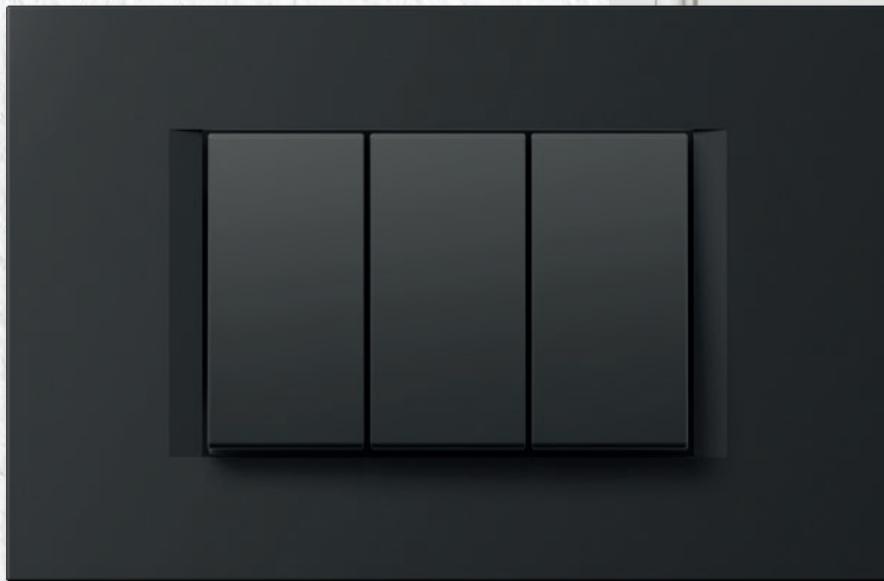

Čiste, ravne linije ustvarjajo brezčasen dizajn.

Straight, smooth lines create a timeless design.



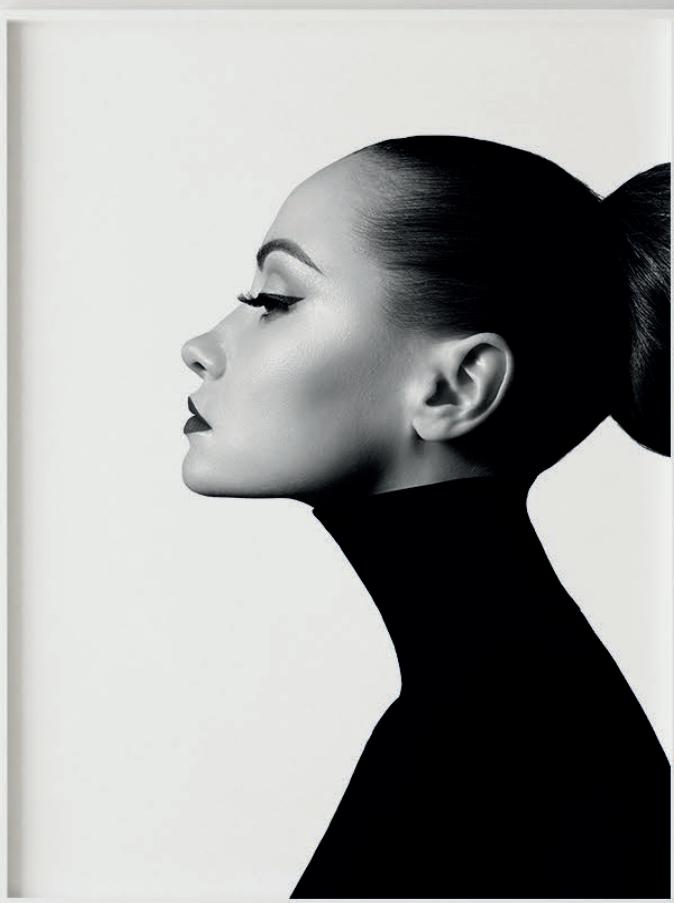

MODUL | LINE



MODUL

LINE

PW



bela-sijaj

MW



bela-mat

IW



bež-sijaj

ES



srebrna-mat

AT



antracit

SB



črna-mat

polar white

matte white

ivory white


elox silver

anthracite


*soft touch
black*

Izberi svojo barvo
Select your colour


13

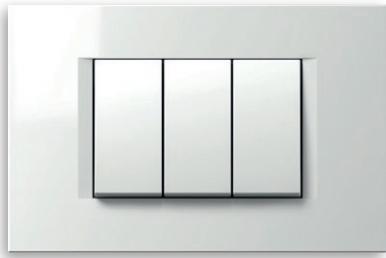

PW bela-sijaj
polar white

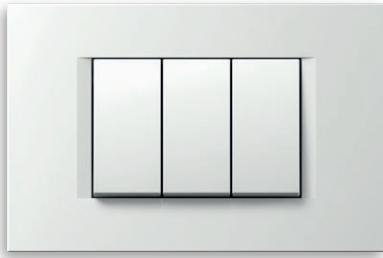

MW bela-mat
matte white

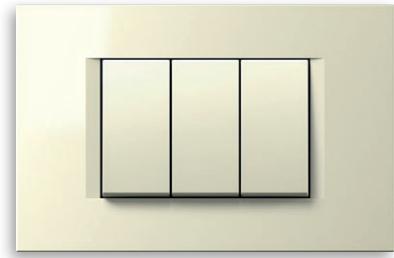

IW bež-sijaj
ivory white



SW kamen beli
stone white



ES srebrna-mat
elox silver




SG zlata-mat
sand gold



TI titan
titanium



IB modra-mat
impulse blue

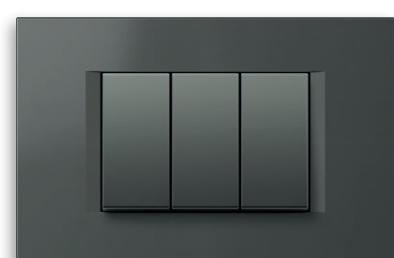

AT antracit
anthracite



NB črna-sijaj
night black



SB črna-mat
soft touch black

MODUL

SOFT



Zaobljene oblike in nežni prehodi prinesejo mehkobo v vaš dom.

Rounded shapes and soft transitions bring softness into your home.







PW



bela-sijaj

MW



bela-mat

IW



bež-sijaj

ES



srebrna

AT



antracit

SB



črna-mat

polar white

matte white

ivory white


elox silver

anthracite


*soft touch
black*

Izberi svojo barvo
Select your colour


17

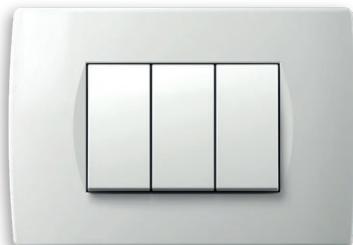

PW bela-sijaj
polar white

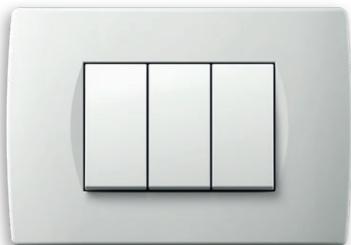


MW bela-mat
matte white

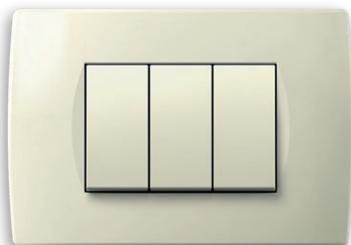


IW bež-sijaj
ivory white



ES srebrna
elox silver

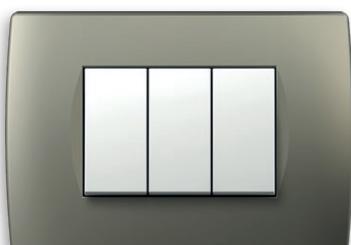

TI titan
titanium

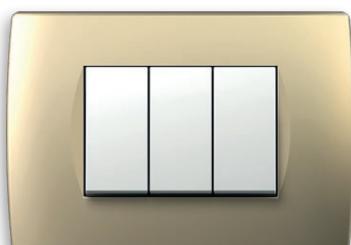

SG zlata
sand gold



WW orех
walnut



WE wenge
wenge



AT antracit
anthracite



NB črna-sijaj
night black



SB črna-mat
soft touch black

MODUL

PURE



Popolnost ambienta se skriva v podrobnostih. Dovolite naravi, da z dekorativnimi okvirji iz lesa, stekla in kovine obogati vaš prostor.

The details represent the completeness of the entire ambience. Let the nature enrich your space with decorative cover plates made of wood, glass and metal.







MODUL

PURE

PW



bela-sijaj

MW



bela-mat

IW



bež-sijaj

ES



srebrna

AT



antracit

SB



črna-mat

polar white

matte white

ivory white

elox silver

anthracite

*soft touch
black*

Izberi svojo barvo
Pick your colour

21

steklo
glass



GL bela
glass light

kovina
metal



MH kovano jeklo
hammered steel


les
wood



WM javor
maple



GD črna
glass dark

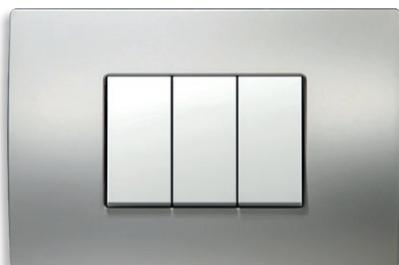


MS satinirano srebro
satin silver



WB bambus
bamboo




MN satiniran nikelj
satin nickel

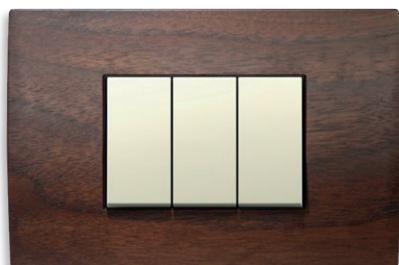

WW oreh
walnut




ME zarjavelo železo
etched iron

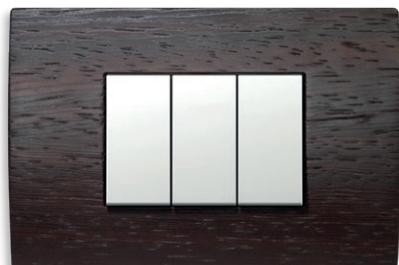

WE wenge
wenge

MODUL

EDGE

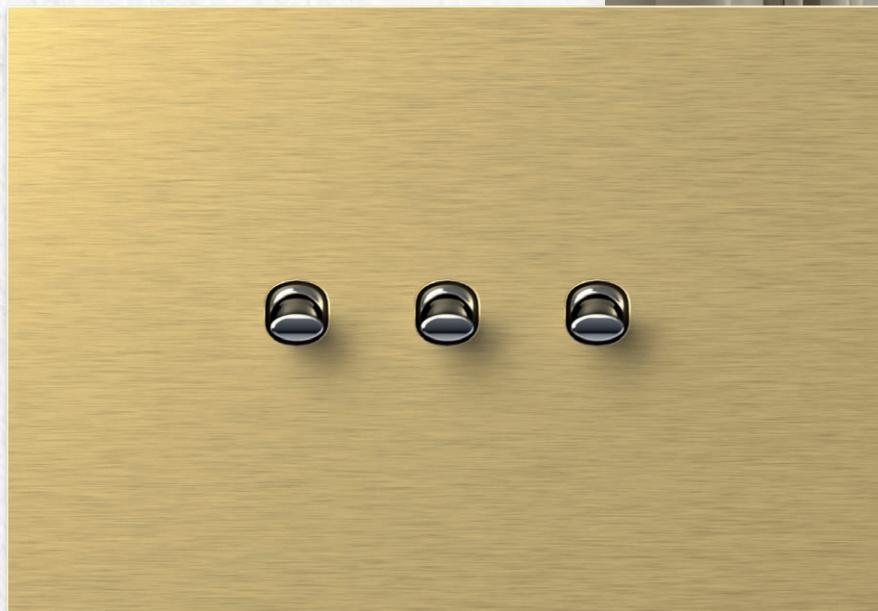

Nova prestižna linija, ki nudi posebno čutno in vizualno izkušnjo
kot nikoli doslej. Si upate?

*The new prestigious product line offers a special sensory and visual
experience like no other before. Are you bold enough?*







MODUL

EDGE

PB



črna

PA



antracit

PG



zlata

PC



krom

black

anthracite


gold

chrome


kovina
metal



MA srebrna
silver

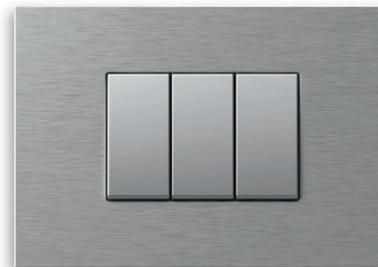


MA srebrna
silver

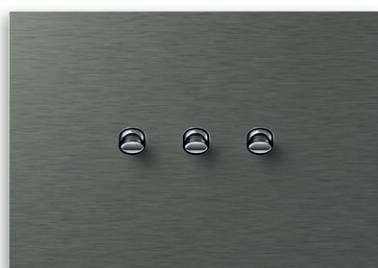

MT antracit
anthracite



MT antracit
anthracite

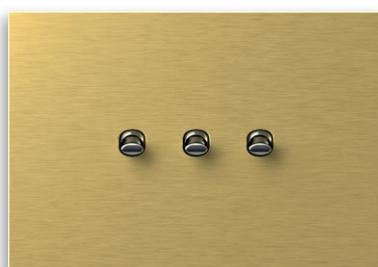


MZ zlata
gold




steklo
glass



GL bela
glass light

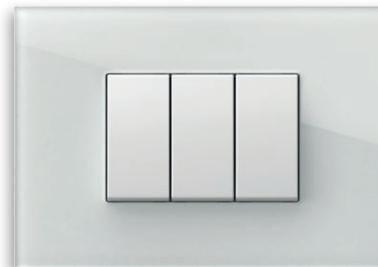

GD črna
glass dark

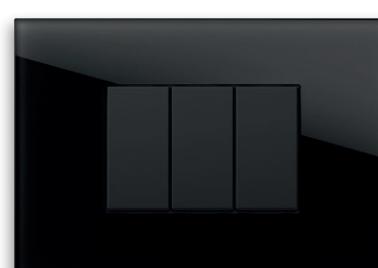

MODUL

EDGE



Čistost stekla dovoli svetlobi, da se poigra in manifestira v novih steklenih dekorativnih okvirjih EDGE. Kontrastni barvi zadovoljita še tako prefinjen okus.

The purity of the glass allows the light to playfully manifest in the new EDGE glass decorative cover plates. The two contrast colours satisfy even the most sophisticated taste.





steklo
glass



GL bela
glass light



GD crna
glass dark

MODUL

EDGE



Po zaslugu impresivne obdelave aluminij zasije v novi luči - kovinskih dekorativnih okvirjih EDGE. V treh barvnih izkušnjah, vrednih pozornosti.

Thanks to the impressive treatment, the aluminium shines with a new light – EDGE metal decorative cover plates. The three colours are worthy of your attention.







kovina
metal



MA srebrna
silver

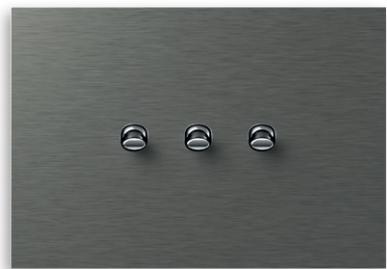

MT antracit
anthracite

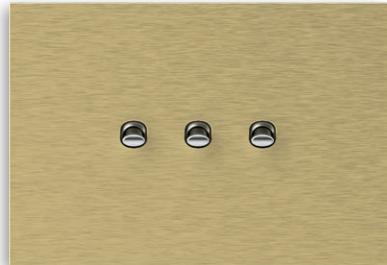

MZ zlata
gold





MODUL

UNIVERZALNOST
UNIVERSALITY




MODUL

- LINE
- SOFT
- PURE
- EDGE

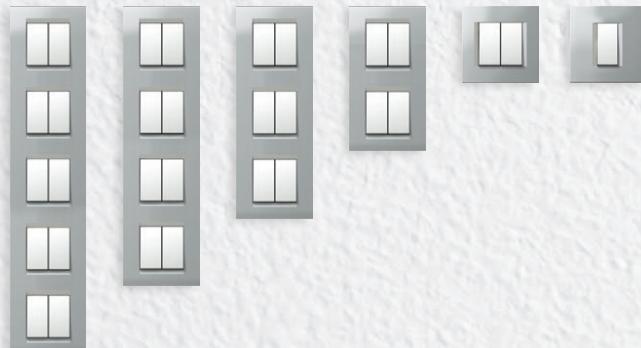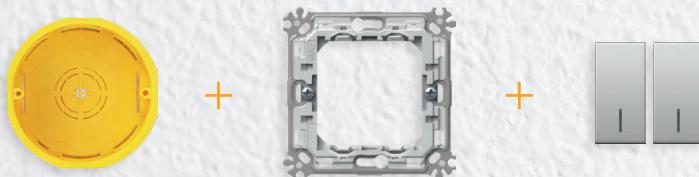

MODUL

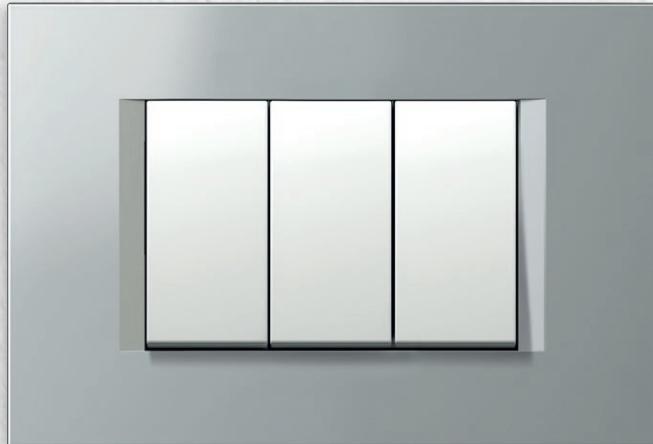

MODUL

- LINE
- SOFT
- PURE
- EDGE



2 x 7M



1M =




2M =



Funkcijske elemente enostavno pritrdite v nosilec. Za vas smo razvili rešitev "klik-in, klik-out", ki vam skrajša čas montaže. Priključni kontakti so lahko dostopni s sprednje strani.


The function elements are easily fitted inside the mounting frame.

The "klik-in, klik-out" solution we have developed for you will reduce installation time. The connection contacts are easily accessible from the front.

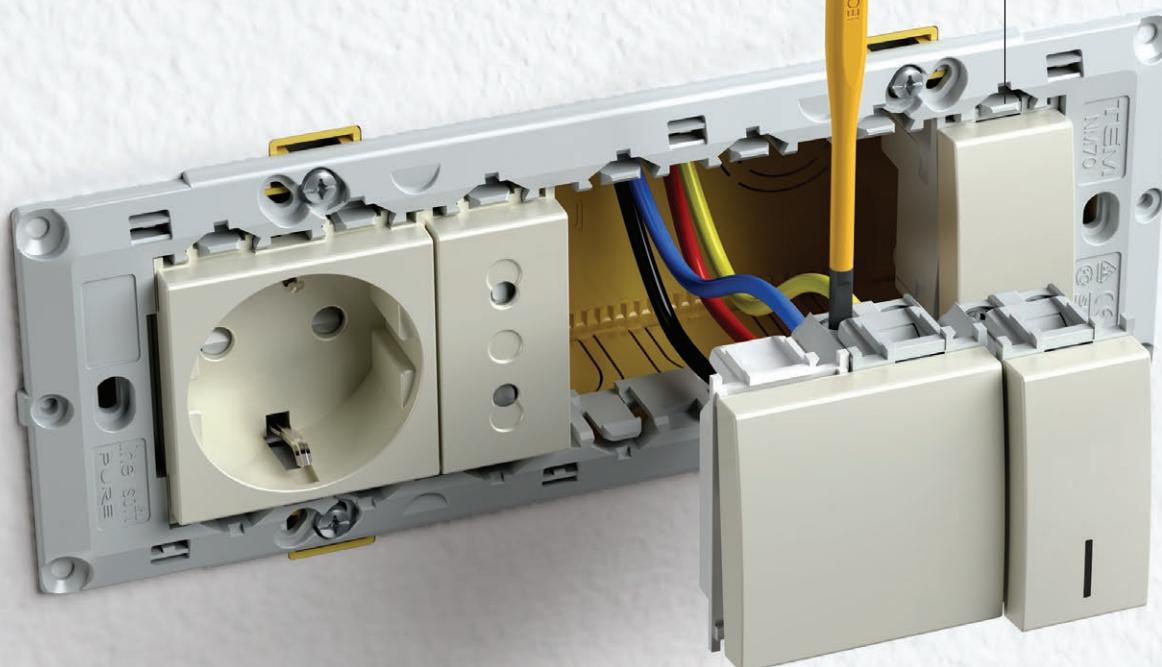


Modul lahko vgradite v katerokoli vrsto stene, naj bo klasična, suho montažna ali betonska. Vgradnja je enostavna, ponuja vam možnosti sestavljanja pravokotnih ali okroglih doz na ustreerne razdalje. Uporabljeni materiali so testirani po visokih standardih.

The Modul is suitable for all wall types and can be used in conventional, hollow wall or concrete constructions. It is easy to install and enables you to combine rectangular or round boxes at the proper distances. The materials used are compliant with high standards.

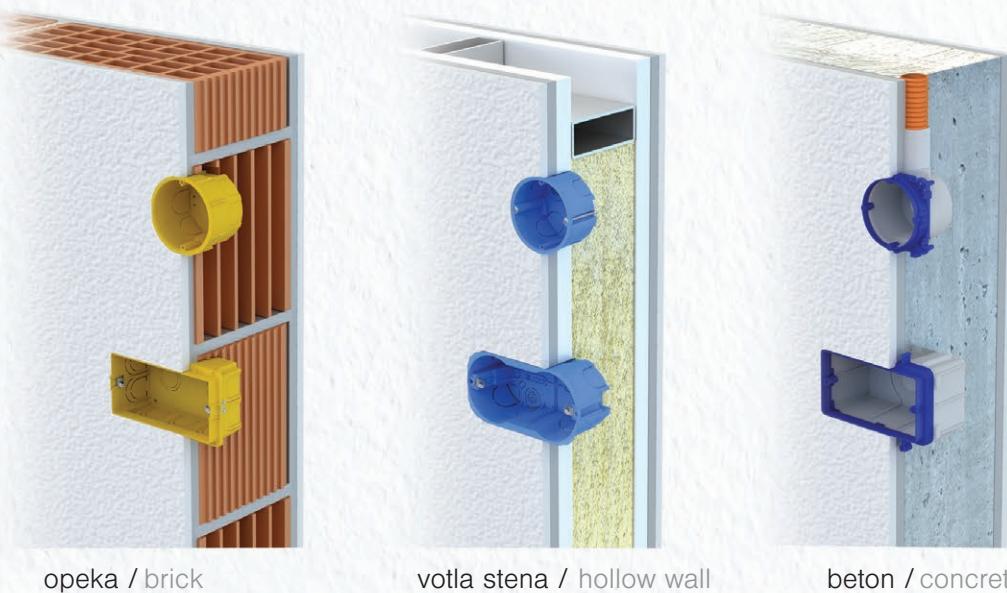

Modul vam ponuja veliko možnosti tudi ob uporabi okroglih doz. Kombinirate lahko vodoravno ali navpično, samostojno ali v skupinah. Kovinski nosilec zagotavlja odlično stabilnost tudi pri grobi uporabi in je primeren za vse dekorativne okvirje.

The Modul enables a many possibilities even with round boxes. You can combine them horizontally or vertically, individually or in groups. The metal mounting frame ensures excellent stability even with rough use and is suitable for any decorative cover plates.

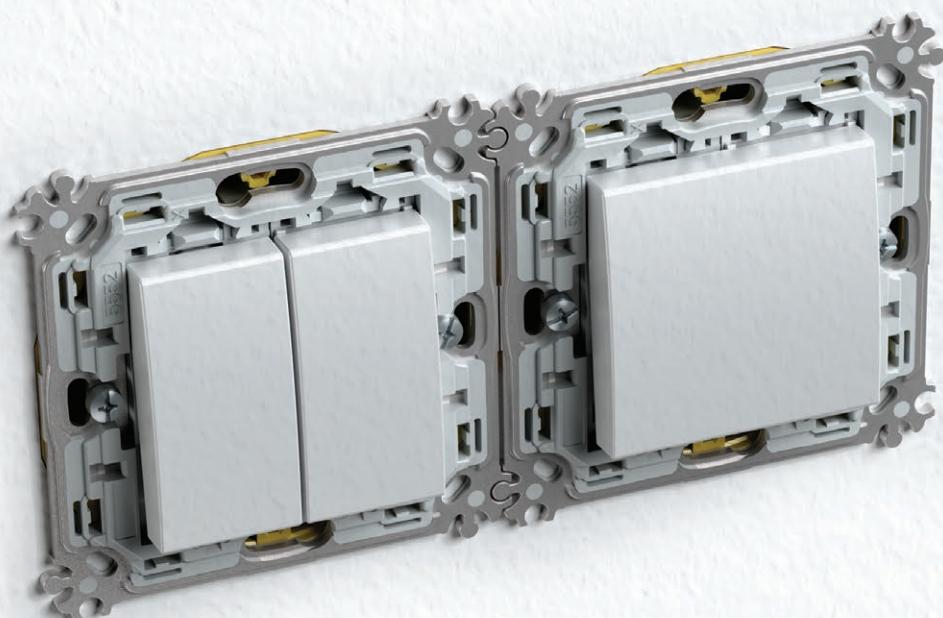



PW
bela-sijaj
polar white



MW
bela mat
matte white



SB
črna-mat
soft touch black



AT
antracit
anthracite



ES
srebrna
elox silver



IW
bež-sijaj
ivory white



GRAFIKE
SYMBOLS

01	02	03	04	05	06	07	08	09	10	11	12	13	14	20	21
01	02	03	04	05	06	07	08	09	10	11	12	13	14	20	21
01	02	03	04	05	06	07	08	09	10	11	12	13	14	20	21
01	02	03	04	05	06	07	08	09	10	11	12	13	14	20	21

Legend:

- 01 Bell icon
- 02 Fire icon
- 03 Light switch icon
- 04 Circle icon
- 05 Fan icon
- 06 Lamp icon
- 07 Plug icon
- 08 Key icon
- 09 Down arrow icon
- 10 Double-headed arrow icon
- 11 Left arrow icon
- 12 Right arrow icon
- 13 Staircase icon
- 14 Number 1 icon
- 20 Number 0 icon
- 21 Number 2 icon
- 22 Clock icon
- 23 Sun icon
- 24 Lamp icon
- 25 Staircase icon
- 26 Glass icon
- 27 Alarm icon
- 28 Off icon
- 29 On icon
- 30 Number 31 icon
- 31 Number 32 icon
- 32 Number 33 icon
- 33 Number 34 icon
- 34 Number 35 icon
- 35 AC icon
- 36 Snowflake icon
- 37 Snowflake icon
- 38 Music note icon
- 39 Lamp icon
- 40 Lamp icon
- 41 Moon icon
- 42 Lamp icon
- 43 Lamp icon
- 44 Lamp icon
- 45 Lamp icon
- 46 Lamp icon
- 47 Lamp icon
- 48 Lamp icon



Zanesljiva priključitev vodnikov različnih premerov.

Reliable connection even when different size of wires are used.



Vse vtičnice imajo vgrajeno varovalo pred dotikom elementov pod napetostjo.

All the sockets are equipped with a safety shutter assuring the protection to live contacts.



Dolga življenska doba stikal in
ustreznost sodobnim standardom.

*Long-life of switches and adequacy
to the international standards.*



Zanesljivost preklopa omogočajo
srebrne kontaktne kovice.

*The switch is highly reliable via its
silver rivets contacts.*

MODUL

V PROSTORU

IN AMBIENT





BIOPASS - stikalo na prstni odtis

BIOPASS - fingerprint switch

Odklepanje brez ključev.

Keyless unlocking.

MULTIMEDIJA

MULTIMEDIA

Multimedijijski center, ki vam nudi možnost priključitve več različnih komponent na enem mestu.

Multimedia center that allows you to connect a multiple number of components in one place.




OKRASI GA PO SVOJE

MAKE IT UNIQUE

Izberite barvo osvetlitve in dodajte želene grafike, ki ustrezajo vašemu ambientu.

Choose a illumination colour and add desired graphic to suit the ambience of your room.

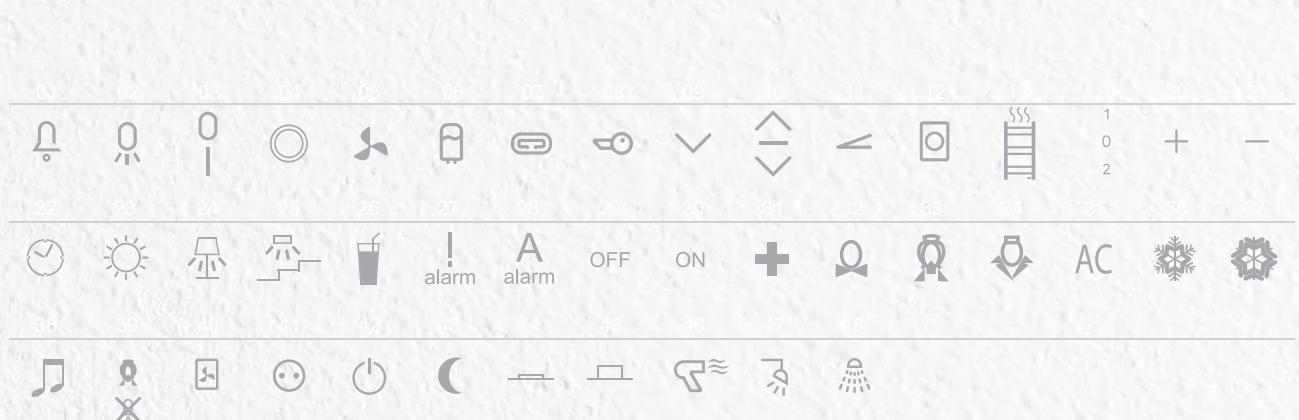

USTVARI SVOJEGA

CREATE YOUR OWN

Pri večjem naročilu naredimo okvirje in funkcijске elemente v barvi po vaših željah.

When ordering large quantities, cover plates and function elements can be made in the colour of your choice.





VEČOPRAVILNO ČASOVNO STIKALO

MULTIPURPOSE TIMER SWITCH

4 v 1

- časovník
- rele
- tipkalo
- stikalo

4 in 1

- timer
- relay
- push button
- switch






SM11 PW IN 01


tip type	naziv description	tehnični opis technical data	velikost size	barva colour	opcijski opis 1 optional data 1	opcijski opis 2 optional data 2
SM10	STIKALO ENOPOLNO SWITCH 1WAY	16AX 250V~	1M	<input type="checkbox"/> PW bela-sijaj polar white	NT nevral neutral	
SM11	TIPKALO ENOPOLNO PUSH BUTTON 1WAY	16A 250V~	1M	<input type="checkbox"/> MW bela- mat matte white		
SM12	STIKALO ENOPOLNO SWITCH 1WAY	20A 250V~	1M	<input checked="" type="checkbox"/> SB črna-mat soft touch black	indikator indicator	
.	.	.	.	<input type="checkbox"/> AT antracit anthracite		
.	.	.	.	<input type="checkbox"/> ES srebrna elox silver		
.	.	.	.	<input type="checkbox"/> IW bež-sijaj ivory white		

STIKALO ENOPOLNO 16AX 250V~ 1M


SM10




- stikalo brez tipke
 - 16AX 250V~, tip SM10
 - ustreza EN 60669-1
 - vijačna pritridlev vodnikov 1.5-2.5mm²
- SWITCH 1WAY 16AX 250V~ 1M**
- switch without replaceable button
 - 16AX 250V~, type SM10
 - in accordance with EN 60669-1
 - screw contacts 1.5-2.5mm²




SM11




- tipkalo brez tipke
 - 16A 250V~, tip SM11
 - ustreza EN 60669-1
 - vijačna pritridlev vodnikov 1.5-2.5mm²
- PUSH BUTTON 1WAY 16A 250V~ 1M**
- push button without replaceable button
 - 16A 250V~, type SM11
 - in accordance with EN 60669-1
 - screw contacts 1.5-2.5mm²




SM12




- stikalo brez tipke
 - 20A 250V~, tip SM12
 - ustreza EN 60669-1
 - vijačna pritridlev vodnikov 1.5-2.5mm²
- SWITCH 1WAY 20A 250V~ 1M**
- switch without replaceable button
 - 20A 250V~, type SM12
 - in accordance with EN 60669-1
 - screw contacts 1.5-2.5mm²



SM20




- stikalo brez tipke
 - 16AX 250V~, tip SM20
 - ustreza EN 60669-1
 - vijačna pritridlev vodnikov 1.5-2.5mm²
 - samo v kombinaciji s tipko TM15
- SWITCH 2POLE 16AX 250V~ 1M**
- switch without replaceable button
 - 16AX 250V~, type SM20
 - in accordance with EN 60669-1
 - screw contacts 1.5-2.5mm²
 - only in combination with button TM15



S W I T C H E S S M




SM40




STIKALO ŽALUZIJSKO 1-0-2 16AX 250V~ 1M

- stikalo brez tipke
- 16AX 250V~, tip SM40
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²
- SWITCH SHUTTERS 1-0-2 16AX 250V~ 1M**
- switch without replaceable button
- 16AX 250V~, type SM40
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²




SM41




TIPKALO ŽALUZIJSKO 1-0-2 16A 250V~ 1M

- tipkalo brez tipke
- 16A 250V~, tip SM41
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²
- PUSH BUTTON SHUTTERS 1-0-2 16A 250V~ 1M**
- push button without replaceable button
- 16A 250V~, type SM41
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²




SM60




STIKALO MENJALNO 16AX 250V~ 1M

- stikalo brez tipke
- 16AX 250V~, tip SM60
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²
- SWITCH 2WAY 16AX 250V~ 1M**
- switch without replaceable button
- 16AX 250V~, type SM60
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²




SM61




TIPKALO MENJALNO 16A 250V~ 1M

- tipkalo brez tipke
- 16A 250V~, tip SM61
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²
- PUSH BUTTON 2WAY 16A 250V~ 1M**
- push button without replaceable button
- 16A 250V~, type SM61
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²






SM70



STIKALO KRIŽNO 16AX 250V~ 1M

- stikalo brez tipke
- 16AX 250V~, tip SM70
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²
- SWITCH INTERMEDIATE 16AX 250V~ 1M**
- switch without replaceable button
- 16AX 250V~, type SM70
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²

1M = 22,5 x 45
2M = 45 x 45



PW bela-sijaj
polar white
 MW bela-mat
matte white



SB črna-mat
soft touch black



AT antracit
anthracite



ES srebrna
elox silver



IW bež-sijaj
ivory white

STIKALO ENOPOLNO 16AX 250V~ 1M



SM10PW
 SM10MW
 SM10SB
 SM10AT
 SM10ES
 SM10IW

- 16AX 250V~, tip SM10
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- zamenljiva tipka

SWITCH 1WAY 16AX 250V~ 1M

- 16AX 250V~, type SM10
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm²
- replaceable button



STIKALO ENOPOLNO 16AX 250V~ 1M _ IN



SM10PWIN
 SM10MWIN
 SM10SBIN
 SM10ATIN
 SM10ESIN
 SM10IWIN

- IN indikator
- 16AX 250V~, tip SM10
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- tlevka ni priložena
- zamenljiva tipka

SWITCH 1WAY 16AX 250V~ 1M _ IN

- IN indicator
- 16AX 250V~, type SM10
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm²
- lamp is not included
- replaceable button



TIPKALO ENOPOLNO 16A 250V~ 1M



SM11PW
 SM11MW
 SM11SB
 SM11AT
 SM11ES
 SM11IW

- 16A 250V~, tip SM11
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- zamenljiva tipka

PUSH BUTTON 1WAY 16A 250V~ 1M

- 16A 250V~, type SM11
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm²
- replaceable button



TIPKALO ENOPOLNO 16A 250V~ 1M _ IN 01



SM11PWIN01
 SM11MWIN01
 SM11SBIN01
 SM11ATIN01
 SM11ESIN01
 SM11IWIN01

- IN 01 indikator zvonec
- 16A 250V~, tip SM11
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- tlevka ni priložena
- zamenljiva tipka

PUSH BUTTON 1WAY 16A 250V~ 1M _ IN 01

- IN 01 indicator bell
- 16A 250V~, type SM11
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm²
- lamp is not included
- replaceable button



S W I T C H E S S M



- SM11PWIN02
- SM11MWIN02
- SM11SBIN02
- SM11ATIN02
- SM11ESIN02
- SM11IWIN02

TIPKALO ENOPOLNO 16A 250V~ 1M __ IN 02

- IN 02 indikator luč
- 16A 250V~, tip SM11
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- tlivka ni priložena
- zamenljiva tipka

PUSH BUTTON 1WAY 16A 250V~ 1M __ IN 02

- IN 02 indicator light
- 16A 250V~, type SM11
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm²
- lamp is not included
- replaceable button



- SM20PWNT03
- SM20MWNT03
- SM20SBNT03
- SM20ATNT03
- SM20ESNT03
- SM20IWNT03

STIKALO DVOPOLNO 16AX 250V~ 1M __ NT 03

- NT 03 neutral 0-1
- 16AX 250V~, tip SM20
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- zamenljiva tipka

SWITCH 2POLE 16AX 250V~ 1M __ NT 03

- NT 03 neutral 0-1
- 16AX 250V~, type SM20
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm²
- replaceable button



- SM20PWIN
- SM20MWIN
- SM20SBIN
- SM20ATIN
- SM20ESIN
- SM20IWIN

STIKALO DVOPOLNO 16AX 250V~ 1M __ IN

- IN indikator
- 16AX 250V~, tip SM20
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- tlivka ni priložena
- zamenljiva tipka

SWITCH 2POLE 16AX 250V~ 1M __ IN

- IN indicator
- 16AX 250V~, type SM20
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm²
- lamp is not included
- replaceable button



- SM40PWNT10
- SM40MWNT10
- SM40SBNT10
- SM40ATNT10
- SM40ESNT10
- SM40IWNT10

STIKALO ŽALUZIJSKO 1-0-2 16AX 250V~ 1M __ NT 10

- NT 10 neutral 1-0-2
- 16AX 250V~, tip SM40
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²
- zamenljiva tipka

SWITCH SHUTTERS 1-0-2 16AX 250V~ 1M __ NT 10

- NT 10 neutral 1-0-2
- 16AX 250V~, type SM40
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²
- replaceable button



- SM41PWNT10
- SM41MWNT10
- SM41SBNT10
- SM41ATNT10
- SM41ESNT10
- SM41IWNT10

TIPKALO ŽALUZIJSKO 1-0-2 16A 250V~ 1M __ NT 10

- NT 10 neutral 1-0-2
- 16A 250V~, tip SM41
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²
- zamenljiva tipka

PUSH BUTTON SHUTTERS 1-0-2 16A 250V~ 1M __ NT 10

- NT 10 neutral 1-0-2
- 16A 250V~, type SM41
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²
- replaceable button



- SM60PW
- SM60MW
- SM60SB
- SM60AT
- SM60ES
- SM60IW

STIKALO MENJALNO 16AX 250V~ 1M

- 16AX 250V~, tip SM60
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- zamenljiva tipka

SWITCH 2WAY 16AX 250V~ 1M

- 16AX 250V~, type SM60
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm²
- replaceable button





- SM61PW
- SM61MW
- SM61SB
- SM61AT
- SM61ES
- SM61IW

TIPKALO MENJALNO 16A 250V~ 1M

- 16A 250V~, tip SM61
 - ustreza EN 60669-1
 - vijačna pritrditev vodnikov 1.5-2.5 mm²
 - zamenljiva tipka
- PUSH BUTTON 2WAY 16A 250V~ 1M**
- 16A 250V~, type SM61
 - in accordance with EN 60669-1
 - screw contacts 1.5-2.5 mm²
 - replaceable button



- SM62PWCD
- SM62MWCD
- SM62SBCD
- SM62ATCD
- SM62ESCD
- SM62IWCD

TIPKALO MENJALNO Z VRVICO 16A 250V~ 1M __ CD

- CD indikator+vrvica
 - vrvice dolžine 1.5m
 - 16A 250V~, tip SM62
 - ustreza EN 60669-1
 - vijačna pritrditev vodnikov 1.5-2.5 mm²
- PUSH BUTTON 2WAY WITH CORD 16A 250V~ 1M __ CD**
- CD indicator+cord
 - cord lenght 1.5m
 - 16A 250V~, type SM62
 - in accordance with EN 60669-1
 - screw contacts 1.5-2.5 mm²




- SM70PW
- SM70MW
- SM70SB
- SM70AT
- SM70ES
- SM70IW

STIKALO KRIŽNO 16AX 250V~ 1M

- 16AX 250V~, tip SM70
 - ustreza EN 60669-1
 - vijačna pritrditev vodnikov 1.5-2.5 mm²
 - zamenljiva tipka
- SWITCH INTERMEDIATE 16AX 250V~ 1M**
- 16AX 250V~, type SM70
 - in accordance with EN 60669-1
 - screw contacts 1.5-2.5 mm²
 - replaceable button




1M = 22,5 x 45
2M = 45 x 45



B U T T O N S T M

TM11	PW	NT	03	
tip type	naziv description	velikost size	barva colour	opcijski opis 1 optional data 1
TM11	TIPKA BUTTON	1M	<input type="checkbox"/> PW bela-sijaj polar white	NT neutral
TM12	TIPKA BUTTON	2M	<input type="checkbox"/> MW bela-mat matte white	IN indikator
TM21	POLNILO BLANK	1M	<input checked="" type="checkbox"/> SB črna-mat soft touch black	01
.	.	.	<input checked="" type="checkbox"/> AT antracit anthracite	02
.	.	.	<input type="checkbox"/> ES srebrna elox silver	03
			<input type="checkbox"/> IW bež-sijaj ivory white	
				TIPKA 1M
	<input type="checkbox"/> TM11PW <input type="checkbox"/> TM11MW <input checked="" type="checkbox"/> TM11SB <input checked="" type="checkbox"/> TM11AT <input type="checkbox"/> TM11ES <input type="checkbox"/> TM11IW		- zamenljiva tipka velikosti 1M - ustreza EN 60669-1	
			BUTTON 1M - replaceable button 1M - in accordance with EN 60669-1	
	<input type="checkbox"/> TM11PWIN <input type="checkbox"/> TM11MWIN <input checked="" type="checkbox"/> TM11SBIN <input checked="" type="checkbox"/> TM11ATIN <input type="checkbox"/> TM11ESIN <input type="checkbox"/> TM11WIN			
			TIPKA 1M INDIKATOR	
	<input type="checkbox"/> TM11PWIN <input type="checkbox"/> TM11MWIN <input checked="" type="checkbox"/> TM11SBIN <input checked="" type="checkbox"/> TM11ATIN <input type="checkbox"/> TM11ESIN <input type="checkbox"/> TM11WIN		- zamenljiva tipka velikosti 1M - ustreza EN 60669-1	
			BUTTON 1M INDICATOR - replaceable button 1M - in accordance with EN 60669-1	
	<input type="checkbox"/> TM12PW <input type="checkbox"/> TM12MW <input checked="" type="checkbox"/> TM12SB <input checked="" type="checkbox"/> TM12AT <input type="checkbox"/> TM12ES <input type="checkbox"/> TM12IW		- zamenljiva tipka velikost 2M z nosilcem tipke - uporablja se pri nadgradnji stikala ali tipkala velikosti 1M v velikost 2M - ustreza EN 60669-1	
			BUTTON 2M - replaceable button 2M with button carrier - to upgrade switch or push button from size 1M to size 2M - in accordance with EN 60669-1	
	<input type="checkbox"/> TM12PWIN <input type="checkbox"/> TM12MWIN <input checked="" type="checkbox"/> TM12SBIN <input checked="" type="checkbox"/> TM12ATIN <input type="checkbox"/> TM12ESIN <input type="checkbox"/> TM12WIN		- zamenljiva tipka velikost 2M z nosilcem tipke - uporablja se pri nadgradnji stikala ali tipkala velikosti 1M v velikost 2M - ustreza EN 60669-1	
			BUTTON 2M INDICATOR - replaceable button 2M with button carrier - to upgrade switch or push button from size 1M to size 2M - in accordance with EN 60669-1	

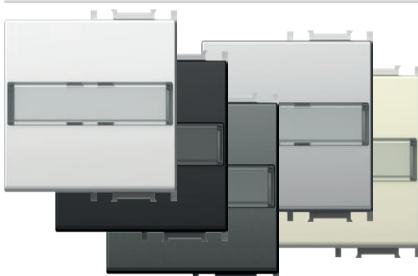
TIPKA 2M Z NAPISNO PLOŠČICO

- TM13PWIL
- TM13MWIL
- TM13SBIL
- TM13ATIL
- TM13ESIL
- TM13IWIL

- zamenljiva tipka velikost 2M z nosilcem tipke
- uporablja se pri nadgradnji stikala ali tipkala
velikosti 1M v velikost 2M
- ustreza EN 60669-1

BUTTON 2M WITH INSCRIPTION PLATE

- replaceable button 2M with button carrier
- to upgrade switch or push button
from size 1M to size 2M
- in accordance with EN 60669-1

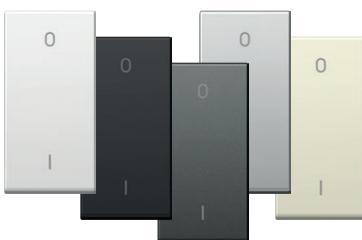
**TIPKA 1M DVOPOLNA**

- TM15PW
- TM15MW
- TM15SB
- TM15AT
- TM15ES
- TM15IW

- zamenljiva tipka velikosti 1M
- samo v kombinaciji z mehanizmom SM20
- ustreza EN 60669-1

BUTTON 1M 2POLE

- replaceable button 1M
- only in combination with mechanism SM20
- in accordance with EN 60669-1

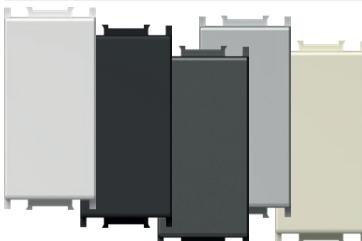**POLNILO 1M**

- TM21PW
- TM21MW
- TM21SB
- TM21AT
- TM21ES
- TM21IW

- za zapolnjevanje praznih mest
- ustreza EN 60669-1

BLANK 1M

- blank modul to fill up empty spaces
- in accordance with EN 60669-1


**POLNILO 2M**

- TM22PW
- TM22MW
- TM22SB
- TM22AT
- TM22ES
- TM22IW

- za zapolnjevanje praznih mest
- ustreza EN 60669-1

BLANK 2M

- blank modul to fill up empty spaces
- in accordance with EN 60669-1

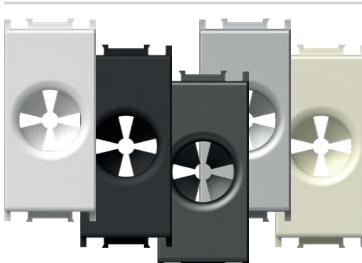**UVODNICA 1M**

- TM31PW
- TM31MW
- TM31SB
- TM31AT
- TM31ES
- TM31IW

- uvodnica za kabel

- ustreza EN-60669-1

CABLE OUTLET 1M


- outlet for cable
- in accordance with EN-60669-1




1M = 22,5 x 45
2M = 45 x 45




TM11
TM15




TM12
TM13



TM21




TM22



TM31

B U T T O N S T M

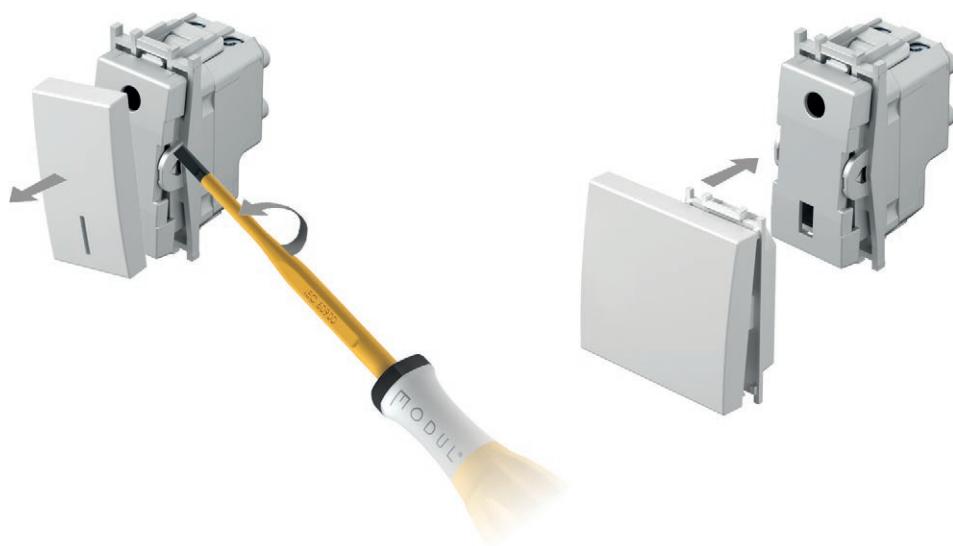


LASERSKI TISK NA TIPKE

- laserski tisk poljubne grafike na označena mesta
- standardni simboli iz zaloge, ostali po naročilu

LASER PRINT ON BUTTONS

- laser print of any graphics on marked locations
- standard symbols from stock, other on request



1M

A
B
C

2M

A	D	G
B	E	H
C	F	I


GRAFIKE


SYMBOLS

01	02	03	04	05	06	07	08	09	10	11	12	13	14	20	21
!	!	0	0	!	!	!	!	!	^	^	^	^	1	+	-
22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37
!	!	!	!	!	!	!	!	!	!	!	!	!	!	!	!
38	39	40	41	42	43	44	45	46	47	48					
!	!	!	!	!	!	!	!	!	!	!					

STANDARDNE GRAFIKE

STANDARD SYMBOLS

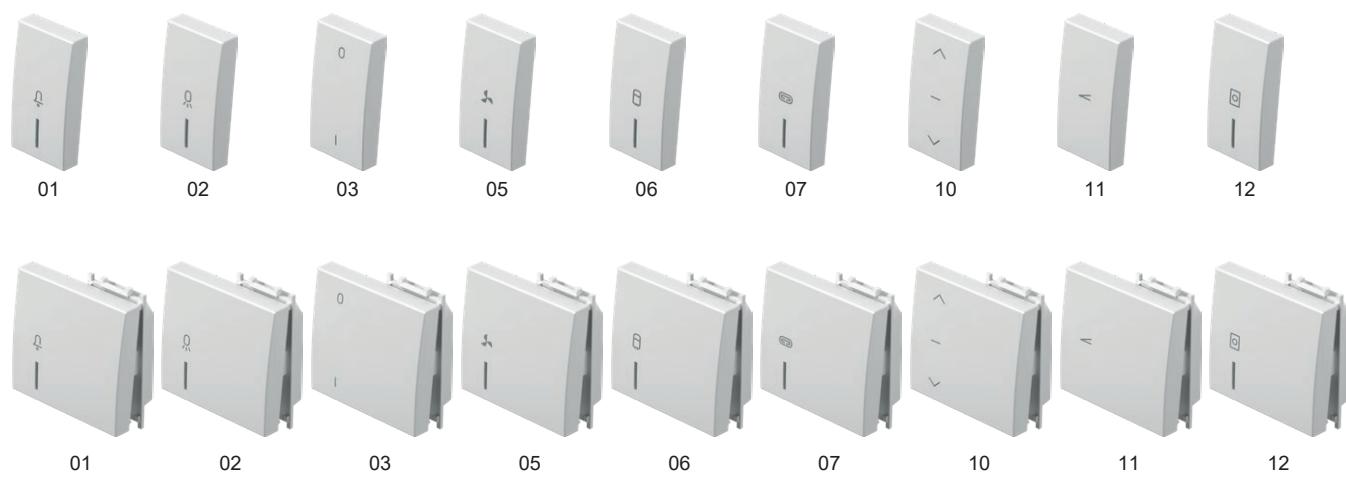

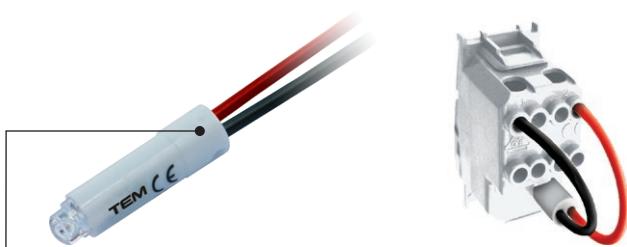

IA20 **WH**

tip type	naziv description	tehnični opis technical data	barva colour
IA10	TLIVKA NEON LAMP	230V~ 0,34W	<input type="checkbox"/> WH bela white
IA20	LED SIGNALIZACIJA LED SIGNALLING UNIT	230V~ AC/DC 0,40W	<input checked="" type="checkbox"/> BL modra blue
IA21	LED SIGNALIZACIJA LED SIGNALLING UNIT	24V AC/DC 0,20W	<input checked="" type="checkbox"/> RD rdeča red
.	.	.	<input checked="" type="checkbox"/> GR zelena green
.	.	.	<input checked="" type="checkbox"/> OR oranžna orange

TLIVKA 230V~ 0,34W

IA10OR

- za indikacijo, signalizacijo
ali stalno signalizacijo
- v kombinaciji s tipko z indikatorjem

NEON LAMP 230V~ 0,34W

- for indication, signalling
or permanent signalling
- in combination with a button featuring an indicator



LED SIGNALIZACIJA 230V AC/DC 0,40W

IA20WH
 IA20GR
 IA20RD
 IA20BL

- za indikacijo, signalizacijo
ali stalno signalizacijo
- v kombinaciji s tipko z indikatorjem

LED SIGNALLING UNIT 230V AC/DC 0,40W

- for indication, signalling
or permanent signalling
- in combination with a button featuring an indicator



LED SIGNALIZACIJA 24V AC/DC 0,20W

IA21WH
 IA21RD

- za indikacijo, signalizacijo
ali stalno signalizacijo
- v kombinaciji s tipko z indikatorjem

LED SIGNALLING UNIT LAMP 24V AC/DC 0,20W

- for indication, signalling
or permanent signalling
- in combination with a button featuring an indicator



LED SIGNALIZACIJA 12V AC/DC 0,10W

IA22WH
 IA22RD

- za indikacijo, signalizacijo
ali stalno signalizacijo
- v kombinaciji s tipko z indikatorjem

LED SIGNALLING UNIT 12V AC/DC 0,10W

- for indication, signalling
or permanent signalling
- in combination with a button featuring an indicator



RC VEZJE 250V~


IA50

- RC vezje za odpravo motenj pri
delovanju LED sijalk
- možna je vzporedna vezava več RC vezij
s sijalkami
- 0,1 µF, 100 Ω, 250V~














RC CIRCUIT 250V~

- RC circuit to eliminate disturbances in the operation
of LED lamps
- parallel connections of more RC circuits with lamps
are possible
- 0,1 µF, 100 Ω, 250V~




S I G N A L I Z A T I O N I A

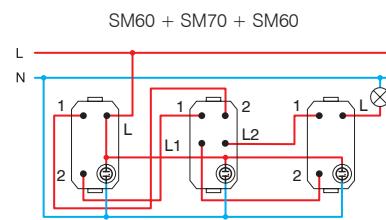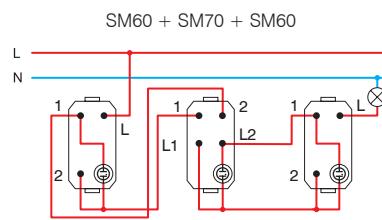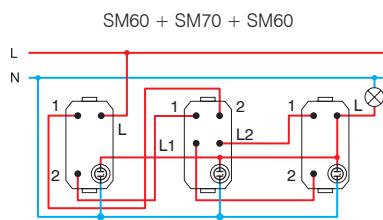Indikacija /
Indication* Signalizacija /
SignalizationStalna signalizacija
Permanent signalling

* vezave niso primerne za varčne (CFL, LED) sijalke /
the connections are not suitable for energy-saving bulbs (CFL, LED)

1M = 22,5 x 45
2M = 45 x 45

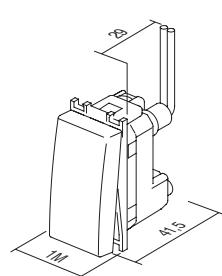



SP10

PC


tip type	naziv description	tehnični opis technical data	velikost size	barva pinov pin colour
SP10	STIKALO ENOPOLNO SWITCH 1WAY	16AX 250V~	1M	■ PC krom chrome
SP11	TIPKALO ENOPOLNO PUSH BUTTON 1WAY	16A 250V~	1M	■ PA antracit anthracite
SP12	STIKALO ENOPOLNO SWITCH 1WAY	20A 250V~	1M	■ PB črna black
.	.	.	.	■ PG zlata gold
.	.	.	.	

STIKALO ENOPOLNO 16AX 250V~ 1M



- SP10PC
- SP10PA
- SP10PB
- SP10PG

- stikalo
- 16AX 250V~, tip SP10
- ustreza EN 60669-1
- vijačna pritridlej vodnikov 1.5-2.5mm²
SWITCH 1WAY 16AX 250V~ 1M
- switch
- 16AX 250V~, type SP10
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²




TIPKALO ENOPOLNO 16A 250V~ 1M



- SP11PC
- SP11PA
- SP11PB
- SP11PG

- tipkalo
- 16A 250V~, tip SP11
- ustreza EN 60669-1
- vijačna pritridlej vodnikov 1.5-2.5mm²
PUSH BUTTON 1WAY 16A 250V~ 1M
- push button
- 16A 250V~, type SP11
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²




STIKALO ENOPOLNO 20A 250V~ 1M



- SP12PC
- SP12PA
- SP12PB
- SP12PG

- stikalo
- 20A 250V~, tip SP12
- ustreza EN 60669-1
- vijačna pritridlej vodnikov 1.5-2.5mm²
SWITCH 1WAY 20A 250V~ 1M
- switch
- 20A 250V~, type SP12
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²





STIKALO DVOPOLNO 16AX 250V~ 1M



- SP20PC
- SP20PA
- SP20PB
- SP20PG

- stikalo
- 16AX 250V~, tip SP20
- ustreza EN 60669-1
- vijačna pritridlej vodnikov 1.5-2.5mm²
SWITCH 2POLE 16AX 250V~ 1M
- switch
- 16AX 250V~, type SP20
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²



S W I T C H E S S P




■ SP40PC
■ SP40PA
■ SP40PB
■ SP40PG

STIKALO ŽALUZIJSKO 1-0-2 16AX 250V~ 1M

- stíkalo
- 16AX 250V~, tip SP40
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²

SWITCH SHUTTERS 1-0-2 16AX 250V~ 1M

- switch
- 16AX 250V~, type SP40
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²




■ SP41PC
■ SP41PA
■ SP41PB
■ SP41PG

TIPKALO ŽALUZIJSKO 1-0-2 16A 250V~ 1M

- tipkalo
- 16A 250V~, tip SP41
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²

PUSH BUTTON SHUTTERS 1-0-2 16A 250V~ 1M

- push button
- 16A 250V~, type SP41
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²




■ SP60PC
■ SP60PA
■ SP60PB
■ SP60PG

STIKALO MENJALNO 16AX 250V~ 1M

- stíkalo
- 16AX 250V~, tip SP60
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²

SWITCH 2WAY 16AX 250V~ 1M

- switch
- 16AX 250V~, type SP60
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²




■ SP61PC
■ SP61PA
■ SP61PB
■ SP61PG

TIPKALO MENJALNO 16A 250V~ 1M

- tipkalo
- 16A 250V~, tip SP61
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²

PUSH BUTTON 2WAY 16A 250V~ 1M

- push button
- 16A 250V~, type SP61
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²




■ SP70PC
■ SP70PA
■ SP70PB
■ SP70PG

STIKALO KRIŽNO 16AX 250V~ 1M



- stíkalo
- 16AX 250V~, tip SP70
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5mm²


SWITCH INTERMEDIATE 16AX 250V~ 1M

- switch
- 16AX 250V~, type SP70
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²



1M= 22,5 x 45




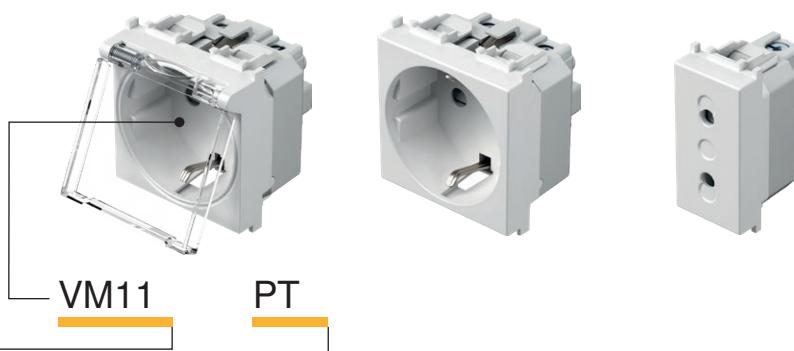

tip type	naziv description	tehnični opis technical data	velikost size	barva colour
VM10	VTIČNICA SCHUKO+KS SOCKET SCHUKO+KS	2P+E 16A 250V~	2M	<input type="checkbox"/> PW bela-sijaj polar white <input checked="" type="checkbox"/> PT bela+prozorna white+transparent <input type="checkbox"/> PP bela+bela white+white
VM11	VTIČNICA SCHUKO+KS+POKROV SOCKET SCHUKO+KS+COVER	2P+E 16A 250V~	2M	<input type="checkbox"/> MW bela-mat matte white <input checked="" type="checkbox"/> MT bela+prozorna white+transparent <input type="checkbox"/> MM bela+bela white+white
VM20	VTIČNICA EURO+KS SOCKET EURO+KS	2P 10A 250V~	1M	<input checked="" type="checkbox"/> SB črna-mat soft touch black <input checked="" type="checkbox"/> BT črna+prozorna soft touch black+transparent <input checked="" type="checkbox"/> BB črna+črna soft touch black+black
.	.	.	.	<input checked="" type="checkbox"/> AT antracit anthracite <input checked="" type="checkbox"/> AT antracit+prozorna anthracite+transparent <input checked="" type="checkbox"/> AA antracit+antracit anthracite+anthracite
.	.	.	.	<input type="checkbox"/> ES srebrna elox silver <input checked="" type="checkbox"/> ST srebrna+prozorna silver+transparent <input type="checkbox"/> SS srebrna+srebrna silver+silver
.	.	.	.	<input type="checkbox"/> IW bež-sijaj ivory white <input checked="" type="checkbox"/> IT bež+prozorna ivory+transparent <input type="checkbox"/> II bež+bež ivory+ivory
.	.	.	.	<input type="checkbox"/> RD rdeča red <input checked="" type="checkbox"/> RT rdeča+prozorna red+transparent <input type="checkbox"/> RR rdeča+rdeča red+red
.	.	.	.	<input type="checkbox"/> GR zelena green <input checked="" type="checkbox"/> GT zelena+prozorna green+transparent <input type="checkbox"/> GG zelena+zelena green+green
.	.	.	.	<input type="checkbox"/> OR oranžna orange <input checked="" type="checkbox"/> OT oranžna+prozorna orange+transparent <input type="checkbox"/> OO oranžna+oranžna orange+orange



VTIČNICA SCHUKO+KS 2P+E 16A 250V~ 2M

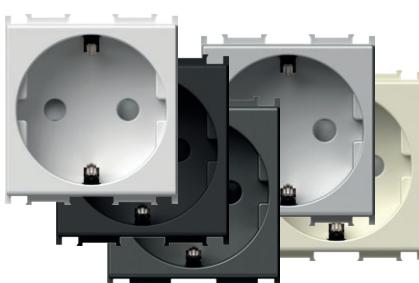


- VM10PW
- VM10MW
- VM10SB
- VM10AT
- VM10ES
- VM10IW

- 2P+E schuko
- 16A 250V~, tip VM10
- ustrez IEC 60884-1, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov



SOCKET SCHUKO+KS 2P+E 16A 250V~ 2M

- 2P+E schuko
- 16A 250V~, type VM10
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm²
- shuttered live contacts




- VM10RD
- VM10GR
- VM10OR

- 2P+E schuko
- 16A 250V~, tip VM10
- ustrez IEC 60884-1, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov



VTIČNICA SCHUKO+KS 2P+E 16A 250V~ 2M

- 2P+E schuko
- 16A 250V~, type VM10
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm²
- shuttered live contacts

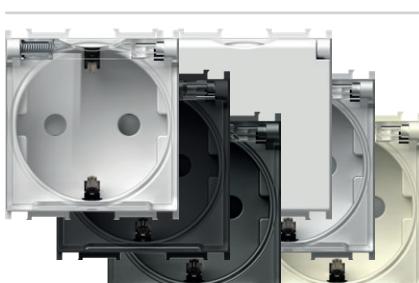

- VM11PT
- VM11MT
- VM11BT
- VM11AT
- VM11ST
- VM11IT
- VM11PP

- 2P+E schuko+pokrov
- 16A 250V~, tip VM11
- ustrez IEC 60884-1, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov

SOCKET SCHUKO+KS+COVER
2P+E 16A 250V~ 2M

- 2P+E schuko+cover
- 16A 250V~, type VM11
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm²
- shuttered live contacts



S O C K E T S V M



- VM20PW
- VM20MW
- VM20SB
- VM20AT
- VM20ES
- VM20IW

VTIČNICA EURO+KS 2P 10A 250V~ 1M


- 2P euro
- 10A 250V~, tip VM20
- ustreza IEC 60884-1, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov



- VM40PW
- VM40MW
- VM40SB
- VM40AT
- VM40ES
- VM40IW

VTIČNICA FRANCOSKA+KS 2P+E 16A 250V~ 2M

- 2P+E francoška
- 16A 250V~, tip VM40
- ustreza IEC 60884-1, NF C 61-314, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov



- VM40RD
- VM40GR
- VM40OR

VTIČNICA FRANCOSKA+KS 2P+E 16A 250V~ 2M


- 2P+E francoška
- 16A 250V~, tip VM40
- ustreza IEC 60884-1, NF C 61-314, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov



- VM41PT
- VM41MT
- VM41BT
- VM41AT
- VM41PP
- VM41ST
- VM41IT

VTIČNICA FRANCOSKA+KS+POKROV 2P+E 16A 250V~ 2M


- 2P+E francoška+pokrov
- 16A 250V~, tip VM41
- ustreza IEC 60884-1, NF C 61-314, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov



- VM30PW
- VM30MW
- VM30SB
- VM30AT
- VM30ES
- VM30IW

VTIČNICA ITALIJANSKA P17/11+KS 2P+E 16A 250V~ 1M

- 2P+E italijanska P17/11
- 16A 250V~, tip VM30
- ustreza IEC 60884-1, CEI 23-50
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov

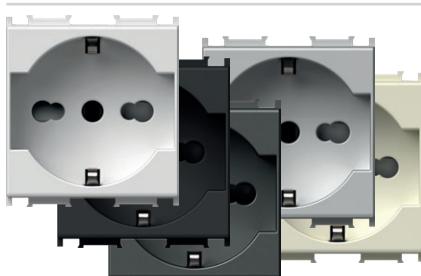


- VM31PW
- VM31MW
- VM31SB
- VM31AT
- VM31ES
- VM31IW

VTIČNICA SCHUKO/ITA P17/11+KS 2P+E 16A 250V~ 2M

- 2P+E schuko/italijanska P17/11
- 16A 250V~, tip VM31
- ustreza IEC 60884-1, CEI 23-50
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov



VTIČNICA EURO+KS 2P 10A 250V~ 1M
- 2P Euro
- 10A 250V~, type VM20
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm²
- shuttered live contacts

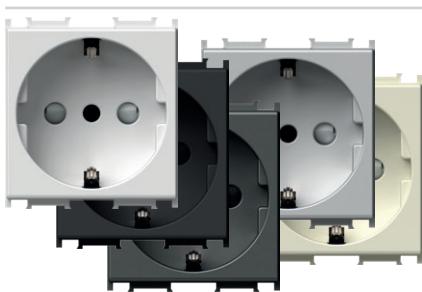

- VM32PW
- VM32MW
- VM32SB
- VM32AT
- VM32ES
- VM32IW


VTIČNICA SCHUKO/ITA P30+KS 2P+E 16A 250V~ 2M

- 2P+E schuko/italijanska P30
- 16A 250V~, tip VM32
- ustreza IEC 60884-1, CEI 23-50
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov



SOCKET SCHUKO/ITA P30+KS 2P+E 16A 250V~ 2M

- 2P+E schuko/Italian P30
- 16A 250V~, type VM32
- in accordance with IEC 60884-1, CEI 23-50
- screw contacts 1.5-2.5 mm²
- shuttered live contacts

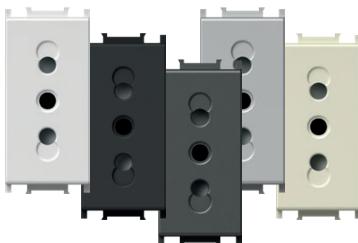

- VM33PW
- VM33MW
- VM33SB
- VM33AT
- VM33ES
- VM33IW

VTIČNICA ITALIJANSKA P11+KS 2P+E 10A 250V~ 1M

- 2P+E italijanska P11
- 10A 250V~, tip VM33
- ustreza IEC 60884-1, CEI 23-50
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov



SOCKET ITALIAN P11+KS 2P+E 10A 250V~ 1M

- 2P+E Italian P11
- 10A 250V~, type VM33
- in accordance with IEC 60884-1, CEI 23-50
- screw contacts 1.5-2.5 mm²
- shuttered live contacts



- VM21PW
- VM21MW
- VM21SB
- VM21AT
- VM21ES
- VM21IW


VTIČNICA EURO/AMERIŠKA+KS 2P 16A 250V~ 1M

- 2P euro/ameriška
- 16A 250V~, tip VM21
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov
- samo za države izven EU



SOCKET EURO/AMERICAN+KS 2P 16A 250V~ 1M

- 2P Euro/American
- 16A 250V~, type VM21
- screw contacts 1.5-2.5 mm²
- shuttered live contacts
- only for countries not members of EU

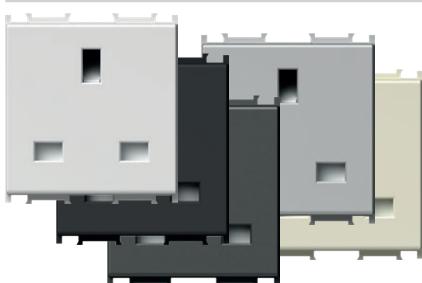

- VM52PW
- VM52MW
- VM52SB
- VM52AT
- VM52ES
- VM52IW


VTIČNICA BRITANSKA BS 1363-2+KS 2P+E 13A 250V~ 2M

- 2P+E britanski standard BS 1363-2
- 13A/250V~, tip VM52
- ustreza BS 1363-2
- vijačna pritrditev vodnikov 1.5-4 mm²
- vgrajena zaščita pred dotikom kontaktov



SOCKET BRITISH BS 1363-2+KS 2P+E 13A 250V~ 2M

- 2P+E British BS 1363-2
- 13A 250V~, type VM52
- in accordance with BS 1363-2
- screw contacts 1.5-4 mm²
- shuttered live contacts

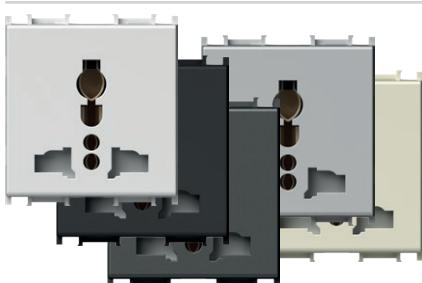

- VM55PW
- VM55MW
- VM55SB
- VM55AT
- VM55ES
- VM55IW

VTIČNICA VEČSTANDARDNA+KS 2P+E 13A 250V~ 2M

- brezvijačna pritrditev vodnikov 1.5-2.5mm²
- vgrajena zaščita pred dotikom kontaktov



SOCKET MULTI-STANDARD+KS 2P+E 13A 250V~ 2M

- plug-in contacts 1.5-2.5 mm²
- shuttered live contacts




VM80

- vzporedna vezava s prvo vtičnico v seriji
- razred zaščite III
- Uc=275V~, Uoc/Isc=6kV/3kA, Up<800V
- ustreza IEC 61643-1
- vodniki 1.5mm², IP20
- zvočni signal ob uničenju

SURGE PROTECTOR MPE MINI 275V/50Hz


- parallel connection with the first socket in the row
- protection class III
- Uc=275V~, Uoc/Isc=6kV/3kA, Up<800V
- in accordance with IEC 61643-1
- wires 1.5mm², IP20
- sound signal at breakdown



UJEMANJE VTIČNIC IN VTIČEV SOCKETS AND PLUGS MATCHING

UJEMANJE VTIČNIC IN VTIČEV SOCKETS AND PLUGS MATCHING

STIL VTIČA / PLUG STYLE	VTIČNICA / SOCKET	VM21	VM52	VM55
ameriški / American	 	●		●
britanski / British	 		●	●

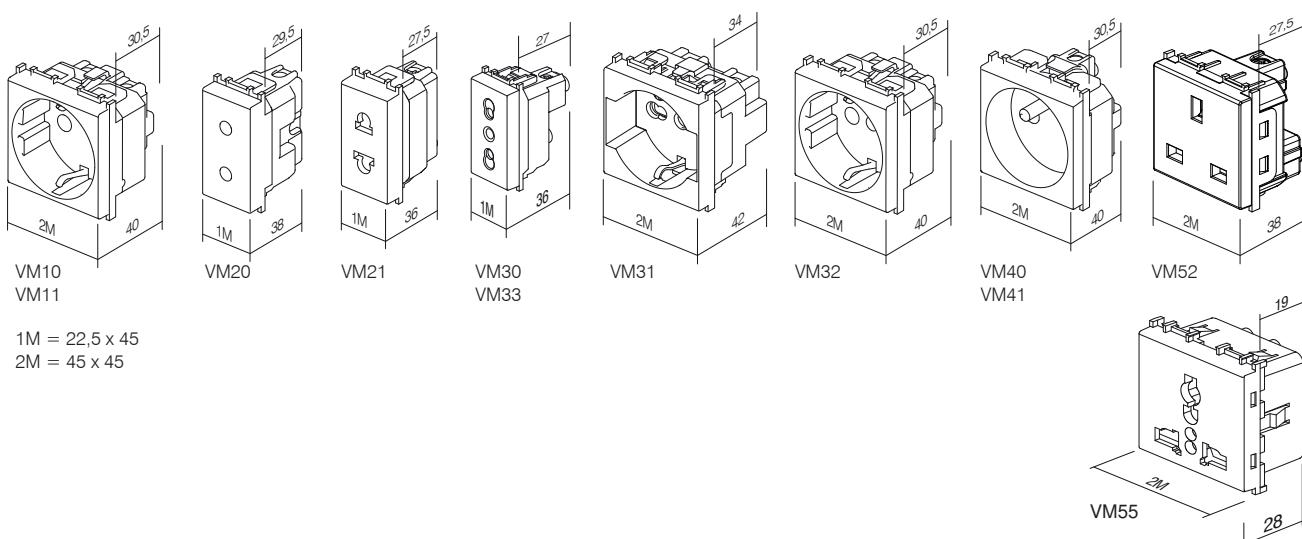



KM10



PW



tip type	naziv description	tehnični opis technical data	velikost size	barva colour
KM10	VTIČNICA TV OSNOVNA SOCKET TV BASIC	0dB	1M	<input type="checkbox"/> PW bela-sijaj polar white
KM11	VTIČNICA TV KONČNA SOCKET TV END-LINE	1dB	1M	<input type="checkbox"/> MW bela-mat matte white
KM12	VTIČNICA TV PREHODNA SOCKET TV TROUGH PASS	10dB	1M	<input checked="" type="checkbox"/> SB črna-mat soft touch black
.	.	.	.	<input type="checkbox"/> AT antracit anthracite
.	.	.	.	<input type="checkbox"/> ES srebrna elox silver
.	.	.	.	<input type="checkbox"/> IW bež-sijaj ivory white

VTIČNICA TV OSNOVNA 0dB 1M



- KM10PW
 - KM10MW
 - KM10SB
 - KM10AT
 - KM10ES
 - KM10IW
- SOCKET TV BASIC 0dB 1M**
- TV osnovna
 - dušenje 0dB
 - konektor zadaj – F standard
 - TV basic
 - reduction 0dB
 - back connector – F standard



VTIČNICA TV OSNOVNA 0dB 2M




- KM20PW
 - KM20MW
 - KM20SB
 - KM20AT
 - KM20ES
 - KM20IW
- SOCKET TV BASIC 0dB 2M**
- TV osnovna
 - dušenje 0dB
 - konektor zadaj – F standard
 - TV basic
 - reduction 0dB
 - back connector – F standard



VTIČNICA TV KONČNA 1dB 1M



- KM11PW
 - KM11MW
 - KM11SB
 - KM11AT
 - KM11ES
 - KM11IW
- SOCKET TV END-LINE 1dB 1M**
- TV končna
 - frekvenčni pas 5÷2400 MHz
 - dušenje < 1 dB
 - ustreza EN 50083-1
 - vijačna priključitev
 - screw contacts





- KM12PW
 KM12MW
 KM12SB
 KM12AT
 KM12ES
 KM12IW
- ↓ Ad: 10dB
IEC 60169-2 male

VTIČNICA TV PREHODNA 10dB 1M


- TV prehodna
 - frekvenčni pas 5÷2400 MHz
 - dušenje < 10 dB
 - ustreza EN 50083-1
 - vijačna priključitev
- SOCKET TV TROUGHPASS 10dB 1M*
- TV troughpass
 - frequency range 5÷2400 MHz
 - reduction < 10 dB
 - in accordance with EN 50083-1
 - screw contacts



- KM15PW
 KM15MW
 KM15SB
 KM15AT
 KM15ES
 KM15IW

VTIČNICA SAT OSNOVNA 0dB 1M

- SAT osnovna
 - dušenje 0dB
 - konektor zadaj – F standard
- SOCKET SAT BASIC 0dB 1M*
- SAT basic
 - reduction 0dB
 - back connector – F standard

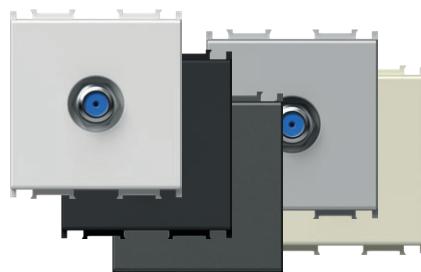

- KM24PW
 KM24MW
 KM24SB
 KM24AT
 KM24ES
 KM24IW

VTIČNICA SAT OSNOVNA 0dB 2M

- SAT osnovna
 - dušenje 0dB
 - konektor zadaj – F standard
- SOCKET SAT BASIC 0dB 2M*
- SAT basic
 - reduction 0dB
 - back connector – F standard



- KM16PW
 KM16MW
 KM16SB
 KM16AT
 KM16ES
 KM16IW
- ↓ Ad: 1dB
24V 500 mA max
IEC 60169-2 male

VTIČNICA SAT KONČNA 1dB 1M

- SAT končna
 - frekvenčni pas 5÷2400 MHz
 - dušenje < 1dB
 - ustreza EN 50083-1
 - vijačna priključitev
- SOCKET SAT END-LINE 1dB 1M*
- SAT end-line
 - frequency range 5÷2400 MHz
 - reduction < 1dB
 - in accordance with EN 50083-1
 - screw contacts






- KM19PW
- KM19MW
- KM19SB
- KM19AT
- KM19ES
- KM19IW

VTIČNICA R OSNOVNA 0dB 1M

- R osnovna
 - dušenje 0dB
 - konektor zadaj – F standard
- SOCKET R BASIC 0dB 1M**
- R basic
 - reduction 0dB
 - back connector – F standard

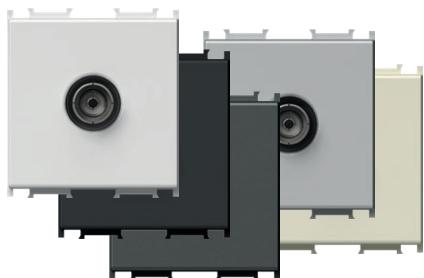


- KM29PW
- KM29MW
- KM29SB
- KM29AT
- KM29ES
- KM29IW

VTIČNICA R OSNOVNA 0dB 2M

- R osnovna
 - dušenje 0dB
 - konektor zadaj – F standard
- SOCKET R BASIC 0dB 2M**
- R basic
 - reduction 0dB
 - back connector – F standard



- KM17PW
- KM17MW
- KM17SB
- KM17AT
- KM17ES
- KM17IW



VTIČNICA SAT-TV KONČNA 1dB 1M

- SAT-TV končna
 - frekvenčni pas 5÷2400 MHz
 - dušenje < 1dB
 - ustreza EN 50083-1
 - vijačna priključitev
- SOCKET SAT-TV END-LINE 1dB 1M**
- SAT-TV end-line
 - frequency range 5÷2400 MHz
 - reduction < 1dB
 - in accordance with EN 50083-1
 - screw contacts




OSNOVNE VEZALNE SHEME
BASIC CONNECTION SAMPLES

samostojna vezava
stand alone connection




KM10
KM20
KM11
KM15
KM24
KM16
KM19
KM29
KM17

zvezda vezava
star connection



KM10
KM20
KM11
KM15
KM24
KM16
KM19
KM29
KM17

prehodna vezava
throughpass connection



KM12 KM11



- KM22PW
- KM22MW
- KM22SB
- KM22AT
- KM22ES
- KM22IW

VTIČNICA AVUDIO 2xRCA 1M

- audio 2x RCA
 - pritrditev vodnikov zadaj s spajkanjem
- SOCKET AUDIO 2xRCA 1M**
- audio 2x RCA
 - soldering connection of cable at the back side



- KM23PW
- KM23MW
- KM23SB
- KM23AT
- KM23ES
- KM23IW

VTIČNICA AVUDIO ZVOČNIŠKA 1M

- audio 2x Ø4mm
 - za priklop zvočniškega vodnika, vtiča Ø4mm ali viličastega kabel čevlja
 - pritrditev vodnikov zadaj s spajkanjem
- SOCKET AUDIO LOUDSPEAKERS 1M**
- audio 2x Ø4mm
 - to accommodate speaker wire, banana plug Ø4mm or spades
 - soldering connection of cable at the back side




- KM26PW
- KM26MW
- KM26SB
- KM26AT
- KM26ES
- KM26IW

VTIČNICA AVUDIO ZVOČNIŠKA 2M

- audio 2x Ø4mm
 - za priklop zvočniškega vodnika, vtiča Ø4mm ali viličastega kabel čevlja
 - pritrditev vodnikov zadaj s spajkanjem
- SOCKET AUDIO LOUDSPEAKERS 2M**
- audio 2x Ø4mm
 - to accommodate speaker wire, banana plug Ø4mm or spades
 - soldering connection of cable at the back side



1M = 22,5 x 45
2M = 45 x 45

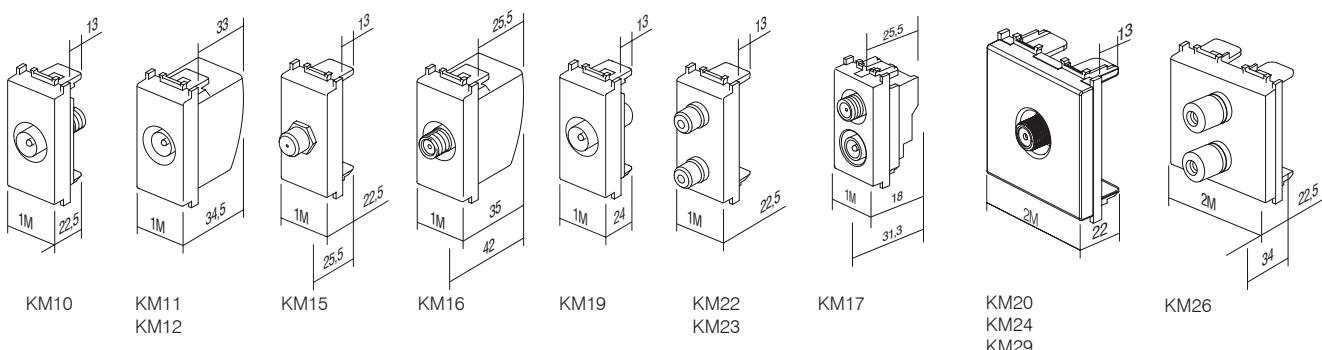



VTIČNICA TEL LT RJ11 6/4 1M

- KM30PW
 - KM30MW
 - KM30SB
 - KM30AT
 - KM30ES
 - KM30IW
- SOCKET TEL LT RJ11 6/4 1M**
- TEL LT vijak
 - RJ11 6/4
 - ustreza IEC 60603-7
 - vijačna pritrditev vodnikov
 - *TEL LT screw*
 - *RJ11 6/4*
 - *in accordance with IEC 60603-7*
 - *screw contacts*



VTIČNICA TEL BT SEC 6/6 1M

- KM31PW
 - KM31MW
 - KM31SB
 - KM31AT
 - KM31ES
 - KM31IW
- SOCKET TEL BT SEC 6/6 1M**
- TEL BT britanski standard
 - SEC sekundarna 6/6
 - ustreza BS 6312
 - vijačna pritrditev vodnikov
 - *TEL BT British standard*
 - *SEC secondary 6/6*
 - *in accordance with BS 6312*
 - *screw contacts*




VTIČNICA TEL KS RJ11 6/4 1M

- KM36PW
 - KM36MW
 - KM36SB
 - KM36AT
 - KM36ES
 - KM36IW
- SOCKET TEL KS RJ11 6/4 1M**
- KS keystone pritrditveni standard
 - RJ11 6/4
 - ustreza IEC 60603-7
 - *KS keystone fixing standard*
 - *RJ11 6/4*
 - *in accordance with IEC 60603-7*



VTIČNICA CAT5e KS RJ45 8/8 1M

- KM37PW
 - KM37MW
 - KM37SB
 - KM37AT
 - KM37ES
 - KM37IW
- SOCKET CAT5e KS RJ45 8/8 1M**
- KS keystone pritrditveni standard
 - CAT5e, RJ45 8/8
 - ustreza IEC 60603-7
 - *KS keystone fixing standard*
 - *CAT5e, RJ45 8/8*
 - *in accordance with IEC 60603-7*

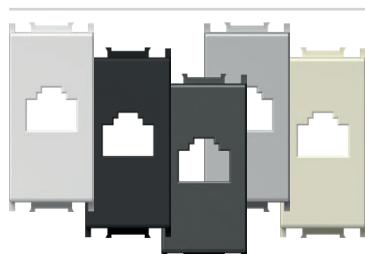

ADAPTER KS 1M

- KM35PW
 - KM35MW
 - KM35SB
 - KM35AT
 - KM35ES
 - KM35IW
- ADAPTER KS 1M**
- KS keystone pritrditveni standard
 - AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
 - komunikacijski modul ni vgrajen
 - *KS keystone fixing standard*
 - *AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...*
 - *communication module not included*



ADAPTER KS S PRAŠNO ZAŠČITO 1M

- KM38PW
 - KM38MW
 - KM38SB
 - KM38AT
 - KM38ES
 - KM38IW
- ADAPTER KS WITH DUST PROTECTION 1M**
- KS keystone pritrditveni standard s protiprašnim pokrovom
 - AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
 - komunikacijski modul ni vgrajen
 - *KS keystone fixing standard with dust protection*
 - *AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...*
 - *communication module not included*






- KM39PW
- KM39MW
- KM39SB
- KM39AT
- KM39ES
- KM39IW

VTIČNICA CAT6 SCH KS RJ45 8/8 1M


- KS keystone pritrditveni standard
 - CAT6 UTP toolless, RJ45 8/8
 - ustreza ISO/IEC 11801
- SOCKET CAT6 SCH KS RJ45 8/8 1M**
- KS keystone fixing standard
 - CAT6 UTP toolless, RJ45 8/8
 - in accordance with ISO/IEC 11801

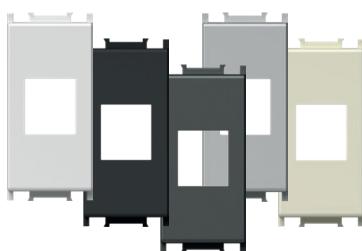

- KM50PW
- KM50MW
- KM50SB
- KM50AT
- KM50ES
- KM50IW

ADAPTER KS UNIVERZALNI 1M

- KS keystone pritrditveni standard
 - primeren za HDMI, USB
 - komunikacijski modul ni vgrajen
- ADAPTER KS UNIVERSAL 1M**
- KS keystone fixing standard
 - suitable for HDMI, USB
 - communication module not included

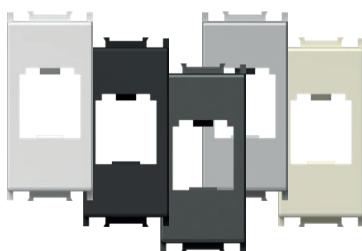

- KM40PW
- KM40MW
- KM40SB
- KM40AT
- KM40ES
- KM40IW

ADAPTER PD 1M

- PD Panduit Mini-COM pritrditveni standard
 - komunikacijski modul ni vgrajen
- ADAPTER PD 1M**
- PD Panduit Mini-COM fixing standard
 - communication module not included



- KM43PW
- KM43MW
- KM43SB
- KM43AT
- KM43ES
- KM43IW

ADAPTER PD S PRAŠNO ZAŠČITO 1M

- PD Panduit Mini-COM pritrditveni standard s protiprašnim pokrovom
 - komunikacijski modul ni vgrajen
- ADAPTER PD WITH DUST PROTECTION 1M**
- PD Panduit Mini-COM fixing standard with dust protection
 - communication module not included



ADAPTER R&M 1M

- KM46PW
- KM46MW
- KM46SB
- KM46AT
- KM46ES
- KM46IW

- R&M pritrditveni standard
- komunikacijski modul ni vgrajen

ADAPTER R&M 1M

- *R&M fixing standard*
- *communication module not included*

**ADAPTER R&M CAT6A 1M**

- KM52PW
- KM52MW
- KM52SB
- KM52AT
- KM52ES
- KM52IW

- R&M pritrditev za CAT6A
- komunikacijski modul ni vgrajen

ADAPTER R&M CAT6A 1M

- *R&M fixing for CAT6A*
- *communication module not included*

**ADAPTER R&M S PRAŠNO ZAŠČITO 1M**

- KM47PW
- KM47MW
- KM47SB
- KM47AT
- KM47ES
- KM47IW

- R&M pritrditveni standard s protiprašnim pokrovom
- komunikacijski modul ni vgrajen

ADAPTER R&M WITH DUST PROTECTION 1M

- *R&M fixing standard with dust protection*
- *communication module not included*

**ADAPTER R&M CAT6A S PRAŠNO ZAŠČITO 1M**


- KM53PW
- KM53MW
- KM53SB
- KM53AT
- KM53ES
- KM53IW

- R&M pritrditev za CAT6A s protiprašnim pokrovom
- komunikacijski modul ni vgrajen

ADAPTER R&M CAT6A WITH DUST PROTECTION 1M

- *R&M fixing for CAT6A with dust protection*
- *communication module not included*



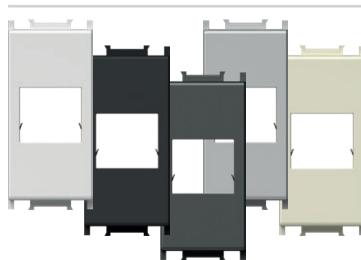


- KM45PW
- KM45MW
- KM45SB
- KM45AT
- KM45ES
- KM45IW

ADAPTER LK 1M

- LK LeoniKerpen eLine / BKS NewLine pritrditveni standard
- komunikacijski modul ni vgrajen

ADAPTER LK 1M

- LK LeoniKerpen eLine / BKS NewLine fixing standard
- communication module not included



KA26


- KM48PW
- KM48MW
- KM48SB
- KM48AT
- KM48ES
- KM48IW

ADAPTER NEXANS/SCHRACK 2M

- adapter za pritrditev modulov Nexans LANmark in Schrack velikosti 45x45mm
- primerena za Nexans tip N423.540N
- primeren za Schrack tip HSEMD02W2F
- komunikacijski modul ni vgrajen

ADAPTER NEXANS/SCHRACK 2M

- fixing adapter for Nexans LANmark and Schrack module 45x45mm
- suitable for Nexans type N423.540N
- suitable for Schrack type HSEMD02W2F
- communication module not included

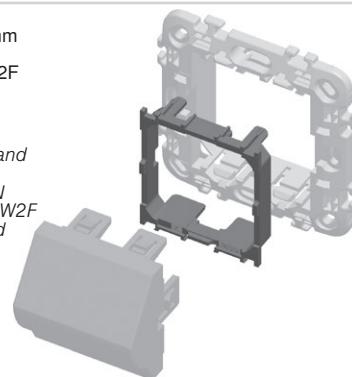

ADAPTER AT&T SYSTIMAX S PRAŠNO ZAŠČITO 1M

- AT&T Systimax pritrditveni standard s protipašnim pokrovom
- komunikacijski modul ni vgrajen

ADAPTER AT&T SYSTIMAX WITH DUST PROTECTION 1M

- AT&T Systimax fixing standard with dust protection
- communication module not included



- KM51PW
- KM51MW
- KM51SB
- KM51AT
- KM51ES
- KM51IW

VTIČNICA USB TIP A 1M

- USB 2.0 vtičnica tip A
- vijačna pritrditev vodnikov, raster 5 mm, 1,5 mm², 1x2P + 1x3P
- označenie:

 - PIN 1 – VCC (+5V, rdeča žica)
 - PIN 2 – signal - (bela žica)
 - PIN 3 – signal + (zelená žica)
 - PIN 4 – GND - masa (črna žica)
 - S – oklop

- ustreza direktivi 2011/95/EU (RoHS2)




SOCKET USB TYPE A 1M

- USB 2.0 socket type A
- screw contacts, raster 5 mm, 1,5 mm², 1x2P + 1x3P
- wiring:


 - PIN 1 – VCC (+5V, red wire)
 - PIN 2 – Data - (white wire)
 - PIN 3 – Data + (green wire)
 - PIN 4 – GND - ground (black wire)
 - S – shield

- in accordance with directive 2011/95/EU (RoHS2)





1M = 22,5 x 45
2M = 45 x 45





KM30



KM31

KM35
KM38
KM48KM36
KM37
KM39KM40
KM43

KM45

KM46
KM47
KM50
KM52
KM53

KM51



KA10

tip type	naziv description	téhniční opis technical data
KA10	KONEKTOR KS CAT3 CONNECTOR KS CAT3	RJ11 6/4
KA11	KONEKTOR KS CAT5e CONNECTOR KS CAT5e	RJ45 8/8
KA12	KONEKTOR KS CAT5eS CONNECTOR KS CAT5eS	RJ45 8/8



KONEKTOR KS CAT3 RJ11 6/4

KA10
 - KS keystone pritrditvení standard
 - CAT3, RJ11 6/4
 - ustreza IEC 60603-7

CONNECTOR KS CAT3 RJ11 6/4
 - KS keystone fixing standard
 - CAT3, RJ11 6/4
 - in accordance with IEC 60603-7



KONEKTOR KS CAT5e RJ45 8/8

KA11
 - KS keystone pritrditvení standard
 - CAT5e, RJ45 8/8
 - ustreza IEC 60603-7

CONNECTOR KS CAT5e RJ45 8/8
 - KS keystone fixing standard
 - CAT5e, RJ45 8/8
 - in accordance with IEC 60603-7



KONEKTOR KS CAT5eS RJ45 8/8

KA12
 - KS keystone pritrditvení standard
 - CAT5eS, RJ45 8/8
 - ustreza IEC 60603-7

CONNECTOR KS CAT5eS RJ45 8/8
 - KS keystone fixing standard
 - CAT5eS, RJ45 8/8
 - in accordance with IEC 60603-7



KA15

KONEKTOR KS CAT6 SCH RJ45 8/8

- KS keystone pritrditveni standard
- CAT6 UTP toolless, RJ45 8/8
- ustreza ISO/IEC 11801

CONNECTOR KS CAT6 SCH RJ45 8/8

- KS keystone fixing standard
- CAT6 UTP toolless, RJ45 8/8
- in accordance with ISO/IEC 11801



KA16

KONEKTOR KS CAT6S SCH RJ45 8/8

- KS keystone pritrditveni standard
- CAT6S STP toolless, RJ45 8/8
- ustreza ISO/IEC 11801

CONNECTOR KS CAT6S SCH RJ45 8/8

- KS keystone fixing standard
- CAT6S STP toolless, RJ45 8/8
- in accordance with ISO/IEC 11801



KA17

KONEKTOR KS CAT6a SCH RJ45 8/8

- KS keystone pritrditveni standard
- CAT6a STP toolless, RJ45 8/8
- ustreza ISO/IEC 11801

CONNECTOR KS CAT6a SCH RJ45 8/8

- KS keystone fixing standard
- CAT6a STP toolless, RJ45 8/8
- in accordance with ISO/IEC 11801



KA18

KONEKTOR SLIM KS CAT6S SCH RJ45 8/8

- KS keystone pritrditveni standard
- slim verzija
- CAT6S STP toolless, RJ45 8/8
- ustreza ISO/IEC 11801
- primeren tudi za dvojni adapter KE46

CONNECTOR SLIM KS CAT6S SCH RJ45 8/8

- KS keystone fixing standard
- slim style
- CAT6S STP toolless, RJ45 8/8
- in accordance with ISO/IEC 11801
- suitable also for KE46 double adapter



KA27PW
 KA27BK

KONEKTOR KS HDMI

- KS keystone pritrditveni standard
- samo v kombinaciji z adapterjem KM50
- HDMI/HDMI

CONNECTOR KS HDMI

- KS keystone fixing standard
- only in combination with adapter KM50
- HDMI/HDMI



KA28

KABEL KS HDMI

- KS keystone pritrditveni standard
- samo v kombinaciji z adapterjem KM50
- HDMI/HDMI

CABLE KS HDMI

- KS keystone fixing standard
- only in combination with adapter KM50
- HDMI/HDMI



tip type	naziv description	tehnični opis technical data	velikost size	barva colour	
EM12	ZATEMNILNIK ROTACIJSKI MENJALNI DIMMER ROTATIVE 2WAY	RL 300W	1M	<input type="checkbox"/> PW bela-sijaj polar white	BL modra blue
EM23	ZATEMNILNIK VGRADNI DIMMER INBOX	R (250 W), (RC,RL 200VA)	/	<input type="checkbox"/> MW bela-mat matte white	RD rdeča red
.	.	.	.	<input checked="" type="checkbox"/> SB črna-mat soft touch black	GR zelena green
.	.	.	.	<input type="checkbox"/> AT antracit anthracite	OR oranžna orange
.	.	.	.	<input type="checkbox"/> ES srebrna elox silver	RG rdeča/zelena red/green
.	.	.	.	<input type="checkbox"/> IW bež-sijaj ivory white	



- EM12PW
- EM12MW
- EM12SB
- EM12AT
- EM12ES
- EM12IW




ZATEMNILNIK ROTACIJSKI/MENJALNI RL 300 W 1M

- rotacijski z menjalnim stikalom
- breme RL, 40W - 300W
- napajanje 230V~ 50Hz
- možna vezava z menjalnim stikalom
- montaža več naprav skupaj v eno dozo dovoljena samo pod pogojem, da njihovo skupno maksimalno breme ne presega maksimalne moči enega zatemnilnika
- v istem tokokrogu je dovoljena uporaba samo enega zatemnilnega stikala
- varovalka ni vgrajena – potrebna vezava zunanje varovalke
- ustreza EN 60669-1
- vijačni kontakti - 1.5÷2.5mm²
- vgrajena LED indikacija stopnje zatemnitve



DIMMER ROTATIVE/2WAY RL 300W 1M

- rotation control with 2-way switch
- load RL, 40W - 300W
- supply voltage 230V~ 50Hz
- 2-way switch combination is possible
- installing several devices together in one box is only permitted if their total maximum load does not exceed the maximum power of a single dimmer
- one circuit allows the use of only one dimmer
- no built-in fuse – external fuse must be used
- in accordance with EN 60669-1
- screw contacts - 1.5-2.5mm²
- integrated LED indication of dimming level






- EM13PW
- EM13MW
- EM13SB
- EM13AT
- EM13ES
- EM13IW

ZATEMNILNIK ROTACIJSKI/MENJALNI LED 60 W 1M

- rotacijski z menjalnim stikalom
- bremena: LED, 0 – 60 W (max. 6 LED zatemnilnih sijalk) GLS, 0 – 60 W
- napajanje 230V~ 50Hz
- možna vezava z menjalnim stikalom
- montaža več naprav skupaj v eno dozo dovoljena samo pod pogojem, da njihovo skupno maksimalno breme ne presega maksimalne moči enega zatemnilnika
- v istem tokokrogu je dovoljena uporaba samo enega zatemnilnega stikala
- varovalka ni vgrajena – potrebna vezava zunanje varovalke
- ustreza IEC60669-2-1
- vijačni kontakti - 1.5÷2.5mm²



DIMMER ROTATIVE/2WAY LED 60W 1M


- rotation control with 2-way switch
- loads: LED, 0 – 60W (max. 6 dimmable LED lamps) GLS, 0 – 60W
- supply voltage 230V~ 50Hz
- 2-way switch combination is possible
- installing several devices together in one box is only permitted if their total maximum load does not exceed the maximum power of a single dimmer
- one circuit allows the use of only one dimmer
- no built-in fuse – external fuse must be used
- in accordance with IEC60669-2-1
- screw contacts - 1.5-2.5mm²



- EM14PW
- EM14MW
- EM14SB
- EM14AT
- EM14ES
- EM14IW




ZATEMNILNIK ROTACIJSKI/MENJALNI LED 180 W 1M

- rotacijski z menjalnim stikalom
- bremena:
- LED, 0 – 180 W (max. 20 LED zatemnilnih sijalk) GLS, 0 – 180 W
- možna vezava z menjalnim stikalom
- montaža več naprav skupaj v eno dozo dovoljena samo pod pogojem, da njihovo skupno maksimalno breme ne presega maksimalne moči enega zatemnilnika
- v istem tokokrogu je dovoljena uporaba samo enega zatemnilnega stikala
- varovalka ni vgrajena – potrebna vezava zunanje varovalke
- ustreza IEC60669-2-1
- vijačni kontakti - 1.5÷2.5mm²



DIMMER ROTATIVE/2WAY LED 180W 1M

- rotation control with 2-way switch
- loads:
- LED, 0 – 180W (max. 20 dimmable LED lamps) GLS, 0 – 180W
- supply voltage 230V~ 50Hz
- 2-way switch combination is possible
- installing several devices together in one box is only permitted if their total maximum load does not exceed the maximum power of a single dimmer
- one circuit allows the use of only one dimmer
- no built-in fuse – external fuse must be used
- in accordance with IEC60669-2-1
- screw contacts - 1.5-2.5mm²

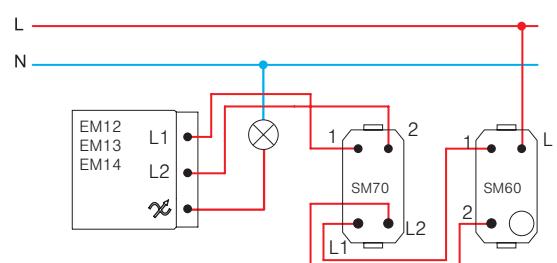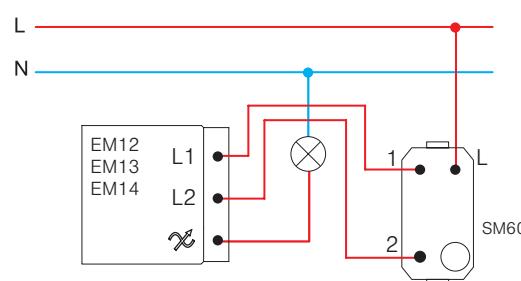



- EM15PW
- EM15MW
- EM15SB
- EM15AT
- EM15ES
- EM15IW




ZATEMNILNIK ROTACIJSKI R 250W 1M

- rotacijski brez stikala
- breme R, 40W - 250W
- napajanje 230V~ 50Hz
- vezava z menjalnim stikalom ni možna
- vezava več zatemnilnikov ni dovoljena
- ustreza EN 60669-1
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- LED indikacija



DIMMER ROTATIVE R 250W 1M

- rotation control without switch
- load R, 40W - 250W
- supply voltage 230V~ 50Hz
- 2-way switch combination is not possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²
- LED indication

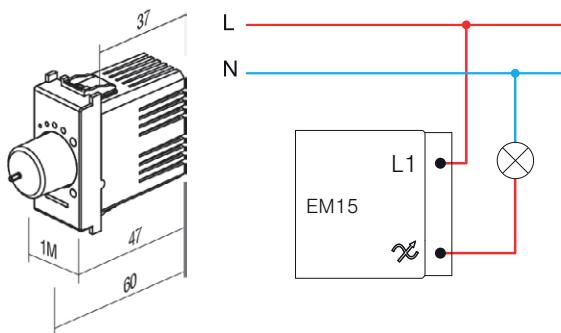

EM23





ZATEMNILNIK VGRADNI R (250 W), (RC,RL 200VA)

- vgradni, za vezavo s tipkalom
- breme RLC 15-250W ali 15-200 VA
- napajanje 230 V~ 50Hz
- možna vezava več tipkal
- vezava več zatemnilnikov ni dovoljena
- vgrajena spominska funkcija
- funkcija mehkega vklopa/izklopa
- »leading edge«
- ustreza EN60669, EN60950, EN 61000, ETSI EN 300 220-1, ETSI EN 300 220-2
- vijačna pritrditev vodnikov do preseka 2,5mm²


DIMMER INBOX R (250 W), (RC, RL 200 VA)

- inbox, controlled by external push button
- load RLC 15-250W or 15-200 VA
- supply voltage 230V~ 50Hz
- several push-buttons combinations are possible
- more dimmers combination is not allowed
- light intensity memory
- soft start/stop function
- »leading edge«
- in accordance with EN60669, EN60950, EN 61000, ETSI EN 300 220-1, ETSI EN 300 220-2
- screw contacts to wires 2,5 mm²

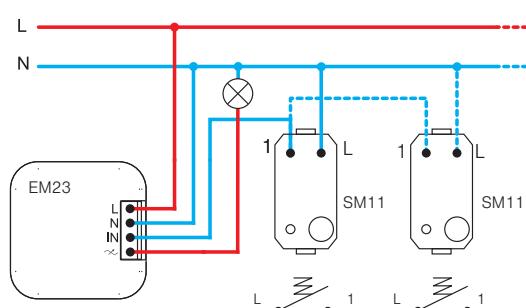



- EM16PW
- EM16MW
- EM16SB
- EM16AT
- EM16ES
- EM16IW





1-10 V ZATEMNILNIK ROTACIJSKI MENJALNI



- nominalna delovna napetost: 10VDC
- minimalna delovna napetost: 0,7VDC
- območje zatemnjevanja: 0,7% - 100% (odvisno od napajalnika in bremen)
- minimalni ponorni tok: 0,1mA
- maksimalni ponorni tok: 120mA
- maksimalna poraba: 0,35W
- prenapetostna zaščita: 15,8VDC do 250mA (nezamenljiva)
- največji pulzni tok: 3ADC
- vrsta bremen: 0-10V, 1-10V in PWM
- tip stikala: mehanički: potisni vklop/izklop
- ničelni vodnik: ni potreben
- nominalna delovna napetost: 100-240 V~, 50-60 Hz
- maksimalni trenutni tok: 10A
- maksimalni delovni tok: 8A
- maksimalna obremenitev (pri 230 V~): 1800VA (1800 x pf = max. W)
- izolacijska upornost: > 100MΩ pri 250 V~
- prenapetostna in kratkostična zaščita: 10A, 350V~ (nezamenljiva)
- rotacijski kot: $270^\circ \pm 5^\circ$
- temperatura delovanja: -5 do 40°C
- temperatura skladisčenja: -30 do 80°C
- maksimalna temperaturna ohišja: 65°C
- maksimalna vlažnost: 90% (brez kondenzacije)
- EMC in imunost: CISPR 15(2008), IEC 61547
- LVD: IEC 60669-1:2017, IEC 60669-2-1:2015


1-10 V DIMMER ROTARY TOGGLE

- nominal operating voltage: 10 VDC
- minimum operating voltage: 0.7 VDC
- dimming range: 0.7% – 100% (depending on power supply and loads)
- minimum sink current: 0.1 mA
- maximum sink current: 120 mA
- maximum consumption: 0.35 W
- surge protection: 15.8 VDC up to 250 mA (not replaceable)
- maximum pulse current: 3 ADC
- load types: 0-10 V, 1-10 V and PWM
- switch type: mechanical: push on/off
- zero cable: not required
- nominal operating voltage: 100–240 V~, 50–60 Hz
- maximum instantaneous current: 10 A
- maximum operating current: 8 A
- maximum load (at 230 V~): 1800 VA (1800 x pf = max. W)
- isolation resistance: > 100 MΩ at 250 V~
- surge protection and Short-circuit protection: 10 A, 350 V~ (not replaceable)
- rotation angle: $270^\circ \pm 5^\circ$
- operating temperature: -5 to 40°C
- storing temperature: -30 to 80°C
- maximum housing temperature: 65°C
- maximum humidity: 90% (no condensation)
- EMC & immunity: CISPR 15(2008), IEC 61547
- LVD: IEC 60669-1:2017, IEC 60669-2-1:2015

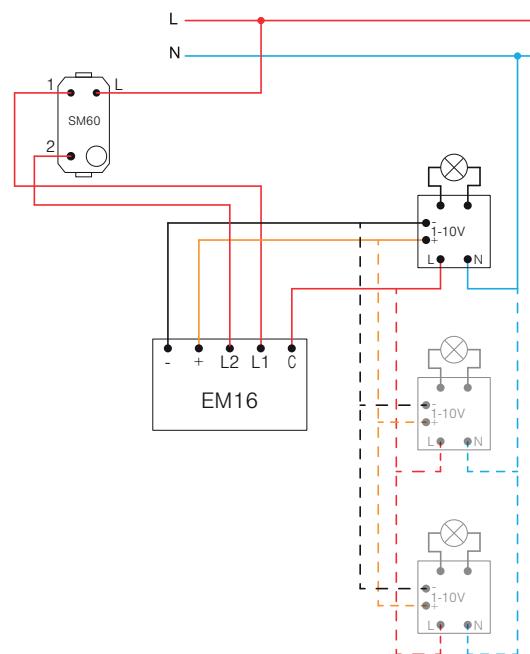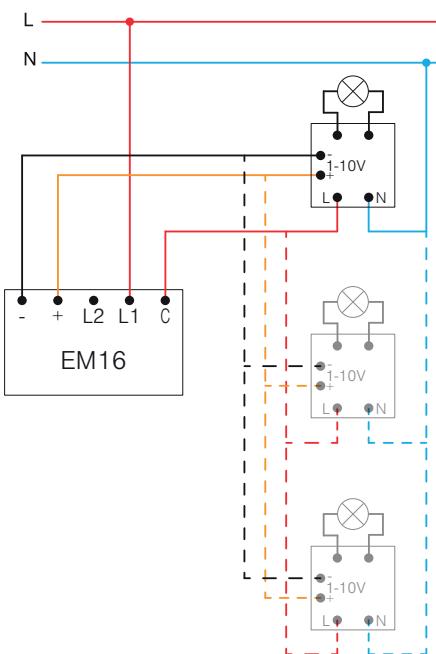

KRMILNI modul MZC za EM18



EM17

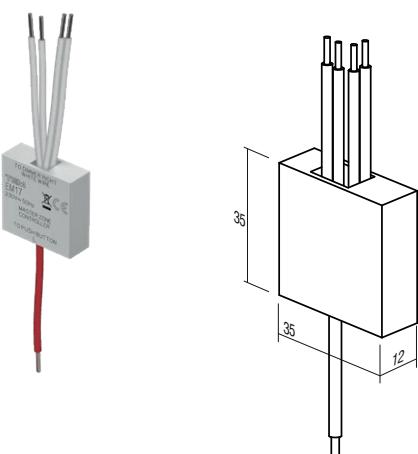

- MZC priklopite po vezalni shemi.
- možna vezava z več tipkali
- montaža samo ene naprave v eno dozo
- samo za notranjo uporabo
- napajanje: 230 V~ 50Hz
- maksimalna upornost žic: 50 kΩ
- maksimalen tok na enoto MZC: 10 mA
- število zatemnilnikov na MZC: 1-4
- maksimalno število MZC v vezavi: omejeno na varovalko v tokokrogu
- temperatura delovanja: -5 °C do 45 °C
- temperatura skladisjenja: -30 °C do 80 °C
- maksimalna vlažnost: 90 % (brez kondenziranja)
- dimenzijske ohišja: 36 x 36 x 12 mm

MZC CONTROL Module for EM18

- Connect the MZC according to the wiring diagram.
- Possible wiring with several push buttons.
- Only one device installation per mounting box.
- For indoor use only.
- Power supply: 230V~ 50Hz
- Max. cable resistance: 50kΩ
- Max. current per MZC unit: 10mA
- Number of dimmers on MZC: 1-4
- Max. number of MZC in the wiring: limited to the fuse in the circuit
- Operating temperature: -5°C to 45°C
- Storage temperature: -30°C to 80°C
- Max. humidity: 90% (no condensation)
- Casing dimensions: 36x36x12 mm

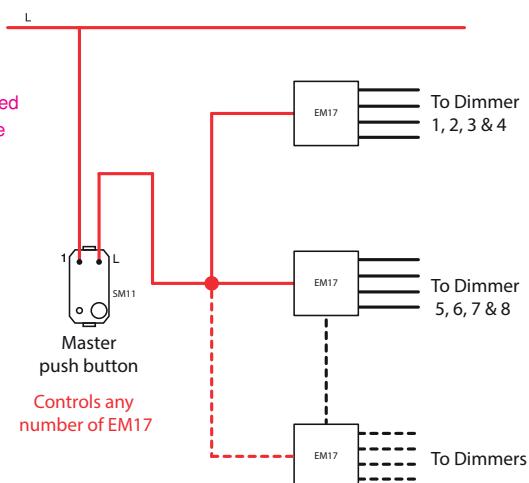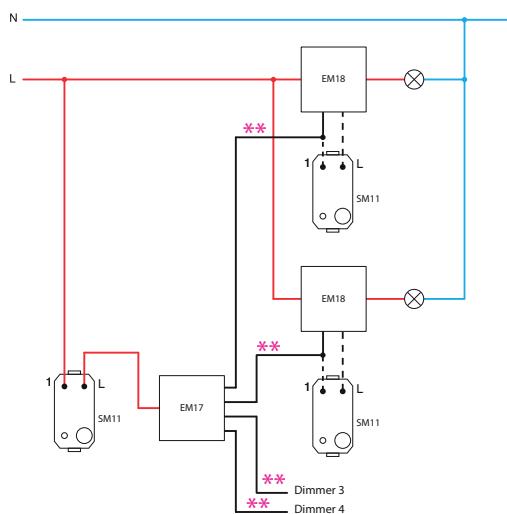

ZATEMNILNIK VGRADNI LED 250W



EM18

- vgradni, za vezavo s tipkalom
- za leading ali trailing edge
- napajanje 230 V~ 50 Hz
- možna vezava z več tipkali
- funkcija pomnenja zadnje nastavitev, razen v primeru izpada napetosti
- funkcija mehkega vklapa/izklopa
- nastavitev minimalne svetilnosti
- montaža samo ene naprave v eno dozo
- samo za notranjo uporabo
- ustreza EN 60669-1 in EN 60669-2-1



DIMMER INBOX LED 250W

- inbox, controlled by external push button
- for leading or trailing edge
- supply voltage 230V~ 50Hz
- several push-buttons combinations is possible
- memory function of the last setting, except in the case of a power failure
- soft start / stop function
- minimum intensity control
- only one dimmer per wall box
- only for indoor usage
- in accordance with EN 60669-1 and EN 60669-2-1

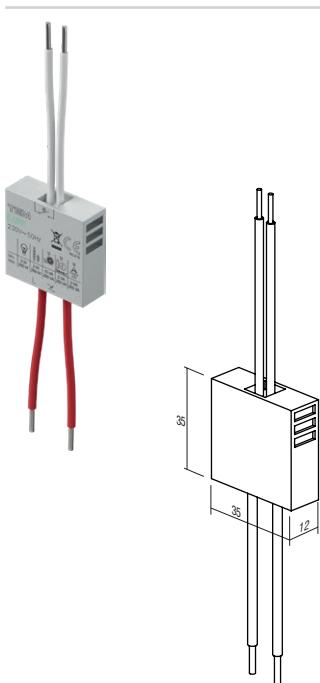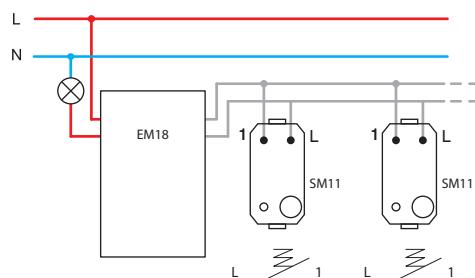





EM19

ZATEMNILNIK VGRADNI DC LED 96W

- vgradni, za vezavo s tipkalom
- vezava z vsemi LED napajalniki s konstantno napetostjo in nekaterimi LED napajalniki s konstantnim tokom, 9 – 48V DC, max 96W (tudi za LED trakove)
- ni za uporabo z induktivnimi bremenji
- možna vezava z več tipkali in več zatemnilnikov
- funkcija pomnenja zadnje nastavitev, razen v primeru izpada napetosti
- funkcija mehkega vklopa / izklopa
- montaža samo ene naprave v eno dozo
- samo za notranjo uporabo

DIMMER INBOX DC LED 96W

- inbox, controlled by external push button
- for use with constant voltage LED drivers and some constant current LED drivers, 9-48V DC, max 96W (also for LED strips)
- not for use with inductive loads
- several push-buttons combinations and several dimmers is possible
- memory function of the last setting, except in the case of a power failure
- soft start / stop function
- only one dimmer per wall box
- only for indoor usage



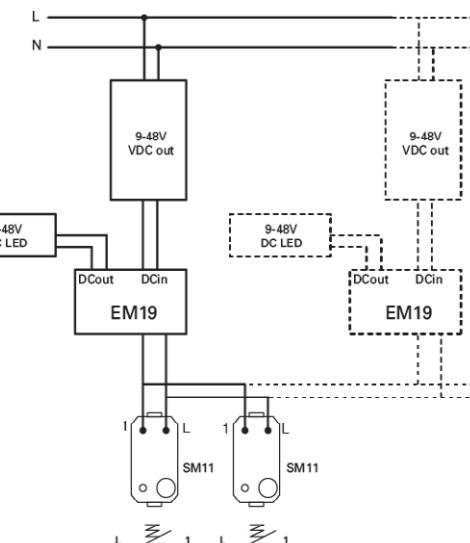
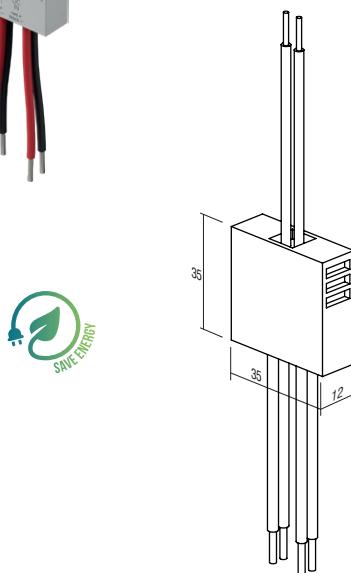


POZOR!

V primeru montaže več zatemnilnih stikali v isto dozo se za vsako dodatno zatemnilno stikalo zmanjša maksimalna skupna moč za 10%.

ATTENTION!

If more dimmers are connected in one box reduce maximum common power for 10% for each dimmer.

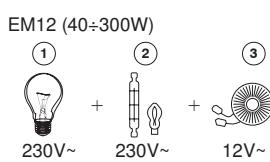EM13 (0÷60W), EM14 (0÷180W),
EM23 (15÷250W, 15÷200VA),


1 - žarnica z žarilno nitko / incandescent lamp
2 - halogenska žarnica / halogen lamp

3 - klasični transformator / classical transformer


4 - zatemnilni elektronski transformator / dimmable electronic transformer

5 - zatemnilna LED sijalka / dimmable LED lamp

EM18 (2÷250VA)

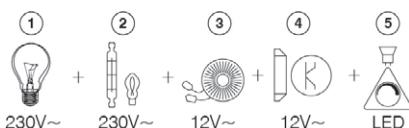

STIKALO / ZATEMNLNIK UNIVERZALNI RLC 0-300W 2M

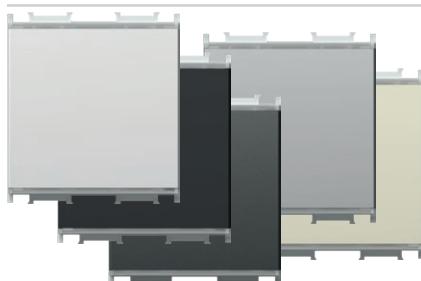

- EM25PW
- EM25MW
- EM25SB
- EM25AT
- EM25ES
- EM25IW



TOUCH EM25 je mikroprocesorsko voden elektronski zatemnilnik. Omogoča vklop, izklop in zatemnjevanje vseh zatemnilnih in nekaterih nezatemnilnih žarnic in sijalk. Vgrajeni mikroprocesor samodejno zazna vrsto sijalke in temu prilagodi režim delovanja. Ob izklopu si zapomni zadnjo nastavitev, saj ima vgrajeno spominsko funkcijo. Funkcija mehkega zagona podaljša življenjsko dobo sijalk. V tipku je vgrajena elegantna LED indikacija, z možnostjo izbiре barve in nastavitev jakosti. Na EM25 lahko vežemo do 5 dodatnih upravljalnih tipkal EM26 (»slave«).

TOUCH EM25 is microprocessor controlled electronic light dimmer. It serves as switch and dimmer for dimmable and some of non-dimmable lamps. Integrated microprocessor automatically identifies the type of lamp and adjusts the operating mode. It remembers the level of dimming after switching off due to integrated memory function. Soft-start function extends the lamp service life. An elegant LED indication is integrated into the button and the option of choosing a colour and intensity level is provided. Optionally one can connect of up to 5 additional control tasters EM26 (»slave«).


- univerzalni elektronski zatemnilnik za vklop, izklop in zatemnjevanje vseh zatemnilnih žarnic in sijalk (klasične, halogenske, LED, CFL, ...) in nekaterih nezatemnilnih sijalk
- samodejno zazna vrsto sijalke in temu prilagodi režim delovanja
- z zatemnjevanjem se zmanjša poraba električne energije
- funkcija mehkega zagona podaljša življenjsko dobo sijalk
- upravljanje preko vgrajenih mikro-stikal
- vgrajena spominska funkcija - ob izklopu si zapomni nivo zatemnitve
- možna vezava do pet (5) dodatnih upravljalnih tipkal EM26
- vezava z menjalnimi stikali ni možna
- vgrajene zaščite pred kratkim stikom, pregrejanjem in preobremenitvijo
- napajanje 230V~ 50Hz
- vgrajena elegantna LED indikacija, z možnostjo nastavitev barve in jakosti
- omogoča zamenjavo klasičnega stikala – dvožična vezava⁽¹⁾
- s trožično vezavo dosežemo polno funkcionalnost zatemnilnika⁽²⁾
- ustreza EN 60669-1 in EN 60669-2-1
- vijačna pritridlev vodnikov 1.5mm² (maks. moment privitja vijakov 0,4 Nm)



SWITCH / DIMMER UNIVERSAL RLC 0-300W 2M


- universal electronic dimmer for ON/OFF switching and dimming of all dimmable lamps (classical, halogen, LED, CFL, ...) and some non-dimmable lamps
- automatic detection of lamp type and adjustment of operating mode
- reduction of energy consumption
- soft start function extends life of lamps
- controlled by build-in micro switches
- memory function included – memorizes brightness on turn-off
- up to five (5) additional control units EM26 can be connected
- connection with 2-way switch is not possible
- build-in short-circuit, overheating and overload protection
- supply voltage 230V~ 50Hz
- an elegant integrated LED indication with the option of setting colour and intensity.
- replacement of classical switch is possible at two-wire connection⁽¹⁾
- full functionality is achieved at three-wire connection⁽²⁾
- in accordance with EN 60669-1 and EN 60669-2-1
- screw contacts 1.5mm² (max. tightening torque 0.4Nm)

⁽¹⁾dvožična vezava
two-wire connection

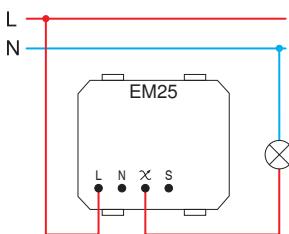

- dvožična vezava omogoča zatemnjevanje zatemnilnih žarnic in sijalk
- two-wire connection allows dimming of dimmable lamps

⁽²⁾trožična vezava
three-wire connection

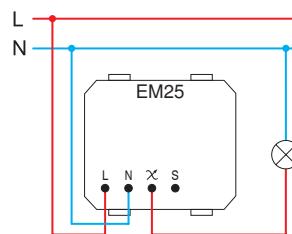

- trožična vezava omogoča zatemnjevanje zatemnilnih žarnic in sijalk in nekaterih nezatemnilnih LED in CFL sijalk
- three-wire connection allows dimming of dimmable lamps and some of non-dimmable LED and CFL lamps

	1	2	5	6	7
Min.	40 W	40 W	40 VA	40 VA	40 VA
Max.	300 W	300 W	300 VA	100 VA	100 VA

(F)	(F)	(F)		
-----	-----	-----	--	--

1 - žarnica z žarilno nitko /
incandescent lamp
2 - halogenska žarnica /
halogen lamp

4 - zatemnilni elektronski transformator /
dimmable electronic transformer
5 - klasični transformator /
classical transformer

	1	2	4	6	7	8	9
Min.	0 W	0 W	0 VA				
Max.	300 W	300 W	120 VA				

(F)	(F)	(F)		
-----	-----	-----	--	--

1 - žarnica z žarilno nitko /
incandescent lamp
2 - halogenska žarnica /
halogen lamp

4 - zatemnilni varčna CFL sijalka /
dimmable energy saving CFL lamp
7 - zatemnilna LED sijalka /
dimmable LED lamp

8 - nezatemnilna varčna CFL sijalka /
non-dimmable energy saving CFL lamp
9 - nezatemnilna LED sijalka /
non-dimmable LED lamp

opombe /
remarks


- (F) filter EM27
 - priporočamo uporabo filtra EM27 /
it is recommended to use filter EM27
- vse krmiljene žarnice in sijalke morajo biti enake /
all controlled lamps must be the same
- tabela bremen velja za sijalke s faktorjem PF>0.5 /
table of loads is valid for lamps with power factor PF>0.5

vklop in izklop ter zatemnjevanje luči /
on / off switching and dimming of lamp




vklop / izklop
kratki pritisk
on / off
short press

izbira barve in nastavitev jakosti LED enote /
LED unit colour and intensity level selection




izklop luči
kratki pritisk
lamp off
short press

*funkcija "RESET" /
"RESET" function




izklop luči
kratki pritisk
lamp off
short press

stopnjevanje
intenzivnosti svetila
daljši pritisk
dimming up
long press



dimming up
long press

hkratni pritisk ~3s
vgrajena lučka 3x utripne
simultaneous press ~3s
integrated LED blinks 3 times



izbira barve
kratki pritisk
colour selection
short press




zatemnjevanje
daljši pritisk
dimming down
long press




osvetljevanje vgrajene LED
daljši pritisk
integrated LED dimming up
long press



stopnjevanje intenzivnosti vgrajene LED enote
daljši pritisk
intensity escalation of the
integrated LED unit
long press







shranitev nastavitev - hkratni kratek pritisk
vgrajena lučka 3x utripne
settings saving - simultaneous short
press
integrated LED blinks 3 times




- * - priporočamo ob vgraditvi zatemnilnika in menjavi žarnic ali sijalk
- obvezno ob uporabi nezatemnilnih sijalk
- funkcija "RESET" pri uporabi dvožične vezave ne deluje
- možno samo pri EM25
- it is recommended at dimmer installation and lamp replacement
- mandatory when using non-dimmable lamps
- "RESET" function is not possible when using two-wire connection
- only possible on EM25

opozorila za vgradnjo /
installation precautions




pri montazi ne pritiskej na tipko /
do not push on button during mounting

TIPKALO UPRAVLJALNO 2M

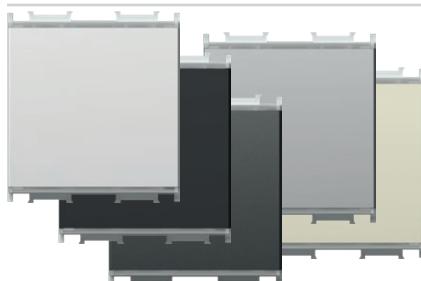

- EM26PW
- EM26MW
- EM26SB
- EM26AT
- EM26ES
- EM26IW

(1)dvožična vezava
two-wire connection

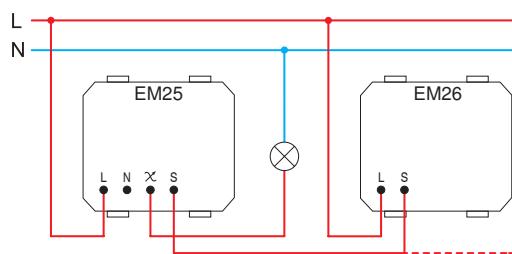

- dvožična vezava omogoča zatemnjevanje zatemnilnih žarnic in sijalk
- pri dvožični vezavi uporaba vsakega dodatnega upravljalnega tipkala poveča minimalno moč bremena za 25W
- two-wire connection allows dimming of dimmable lamps
- in a two-wire connection each additional control unit increases the minimum load by 25W


- v povezavi z univerzalnim zatemnilnikom EM25 omogoča upravljanje luči z več (do pet) lokacij z enako funkcionalnostjo kot EM25
- napajanje 230V~ 50Hz
- ustreza EN 60669-1 in EN 60669-2-1
- vijačna pritrditev vodnikov 1.5mm² (maks. moment privitja vijakov 0,4 Nm)

PUSH-BUTTON CONTROL UNIT 2M

- connected to universal dimmer EM25 allows controlling of lamps with same functionality as EM25
- supply voltage 230V~ 50Hz
- in accordance with EN 60669-1 and EN 60669-2-1
- screw contacts 1.5mm² (max. tightening torque 0.4Nm)



(2)trožična vezava
three-wire connection

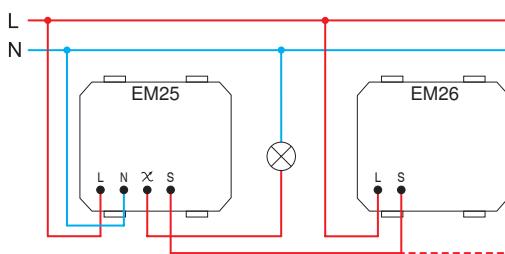

- trožična vezava omogoča zatemnjevanje zatemnilnih žarnic in sijalk in nekaterih nezatemnilnih LED in CFL sijalk
- three-wire connection allows dimming of dimmable lamps and some of non-dimmable LED and CFL lamps


SET STIKALO / ZATEMNILNIK UNIVERZALNI RLC 0-300W 2M PP OL20

- EM25PPOL20


- set vsebuje zatemnilnik EM25, nosilec 2M in okvir LINE 2M PW
- za tehnični opis glej EM25

SET SWITCH / DIMMER UNIVERSAL RLC 0-300W 2M PP OL20

- set includes dimmer EM25, mounting frame 2M and cover plate LINE 2M PW
- for technical details see EM25



2M = 45 x 45







EM27

FILTER OMREŽNIH MOTENJ

- filter frekvenčnih motenj za EM25
- slika je simbolična

FREQUENCY FILTER

- frequency filter for EM25
- image is symbolic

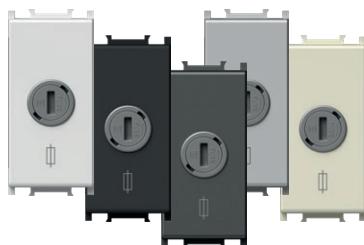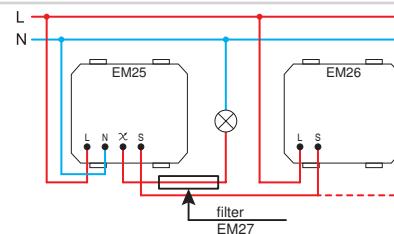

- EM28PW
- EM28MW
- EM28SB
- EM28AT
- EM28ES
- EM28IW

OHIŠJE TALILNE VAROVALKE 230 V~, 50Hz 1M

- Napajanje: 230 V~, 50Hz
- Varovalka: MAX 10 A / 230 V~, 50Hz (varovalka ni priložena)
- Presek žic: 0,75 - 2,5mm²
- Temperatura delovanja: 0 do +40 °C
- Temperatura skladiščenja: -5 do +60 °C
- Stroški priključkov: 2; 1x L, 1x Izvod (L')
- Ustreza standardu: EN 60669-2-1:2004 + A1:2009 + A12:2010 EN 60669-1:2018

**MELT FUSE HOUSING 230 V~, 50 Hz 1M**

- Supply voltage: 230 V~, 50 Hz (fuse not included)
- Fuse: MAX 10 A / 230 V~, 50Hz
- Wire cross-section: 0.75 - 2.5mm²
- Operating temperature: 0 to +40°C
- Storage temperature: -5 to +60°C
- Number of connectors: 2; 1x L, 1x Output (L')
- Corresponds to the standard: EN 60669-2-1:2004 + A1:2009 + A12:2010 EN 60669-1:2018

VAROVALKA

EM29

- T5AH 250V, 5x20mm
- pakirano po 10kos

**FUSE T5AH**

- T5AH 250V, 5x20mm
- packed in packs of 10 pcs



- EM31PW
- EM31MW
- EM31SB
- EM31AT
- EM31ES
- EM31IW

**IR STIKALO 5A 230V~ 1M**

- IR infrardečo stikalo
- napajanje: 230V ±10 % 50Hz
- rele: 5A / 250V~, (zero crossing)
- stopnja varnosti: IP40
- presek žic pri stičniku: 0,75 - 2,5 mm²
- kot zaznavanja: do 110° pri 20°C
- območje zaznavanja: približno 8 m pri 20°C
- nastavljivost časovnega trajanja: od približno 5 s do 12 min
- nastavljivost osvetlitve: od približno 5 do 200 LUX
- temperatura delovanja: od 0°C do +40°C
- ni primeren za vgradnjo v doze, globine 45 mm in ohišja CUBO IP20
- samo za notranjo uporabo

**IR SWITCH 5A 230V~ 1M**

- IR infrared switch
- supply voltage: 230V~, ±10 % 50Hz
- relay: 5A / 250V~, (zero crossing)
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm²
- detection angle: up to 110° at 20°C
- detection area: approx. 8 m at 20°C
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from 0°C to +40°C
- not suitable for installation in 45 mm deep boxes and surface mount box CUBO IP20
- only for indoor usage

IR STIKALO 5A 230V~ 2M



- EM32PW
- EM32MW
- EM32SB
- EM32AT
- EM32ES
- EM32IW



- IR infrardečé stikalo
- napajanje: 230V~ ±10 % 50Hz
- rele: 5A / 250V~ (zero crossing)
- stopnja varnosti: IP40
- presek žic pri stičniku: 0,75 - 2,5 mm²
- kot zaznavanja: do 110° pri 20°C
- območje zaznavanja: približno 8 m pri 20°C
- nastavljivost časovnega trajanja: od približno 5 s do 12 min
- nastavljivost osvetlitve: od približno 5 do 200 LUX
- temperatura delovanja: od 0°C do +40°C
- ni primeren za vgradnjo v doze, globine 45 mm in ohišja CUBO IP20
- samo za notranjo uporabo



IR SWITCH 5A 230V~ 2M

- IR infrared switch
- supply voltage: 230V~, ±10 % 50Hz
- relay: 5A / 250V~, (zero crossing)
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm²
- detection angle: up to 110° at 20°C
- detection area: approx. 8 m at 20°C
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from 0°C to +40°C
- not suitable for installation in 45 mm deep boxes and surface mount box CUBO IP20
- only for indoor usage

SENZORSKO STIKALO 5A 230V~ 1M



- EM33PW
- EM33MW
- EM33SB
- EM33AT
- EM33ES
- EM33IW




- Napajalna napetost: 230 V~, 50Hz
- Izvod: Rele 5 A / 230 V~, 50Hz
- Presek žic: 0,75 – 2,5mm²
- Temperatura delovanja: 0 do +40 °C
- Temperatura skladiščenja: -5 do +60 °C
- Funkcije: nočno stikalo, stikalo z detekcijo premikanja, stikalo z detekcijo prisotnosti
- Indikacija programa: Oznaka na sprednjem pokrovu
- Število tipk/kontrol: 3
- Vrsta delovanja tipk/kontrol: Rotacija
- Nastavljivost časa vklopa izhoda: Od približno 10 s do 12 minut
- Območje zaznavanja: Približno 8 m
- Kot zaznavanja: Do 110°
- Nastavljivost osvetlitve: Od ~5 do ~200 lux
- Število priključkov: 4; 1x N, 1x L, 1x Izvod (L'), 1x Krmiljen vhod (S)
- Možnost krmiljenega vhoda: Da. Priključitev signala omrežne napetosti (230 V~) na sponko S.
- Dodatno: »Zero Crossing« (preklop stikala ob prehodu napetosti skozi 0 V)
- Poraba v stanju OFF / ON: 0,3 W / 0,6 W
- Ustreza standardu: EN 60669-2-1:2004 + A1:2009 + A12:2010 EN 60669-1:2018




SENSOR SWITCH 5A 230V~ 1M


- Supply voltage: 230 V~, 50Hz
- Output: Relay 5 A / 230 V~, 50 Hz
- Wire cross section: 0.75 - 2.5 mm²
- Operating temperature: 0 to + 40 °C
- Storage temperature: -5 to + 60 °C
- Functions: Night switch, Motion detection switch, Presence Detection Switch
- Programme indication: Mark on front cover
- Number of keys/controls: 3
- Operation Type of Key/Control: Rotation
- Adjusting the output activation time: From approx. 10 sec to 12 minutes
- Detection Area: Approximately 8 m
- Detection angle: Up to 110°
- Illumination adjustment: From ~5 to ~200 lux
- Number of connectors: 4; 1x N, 1x L, 1x Output (L'), 1x Controlled input (S)
- Controlled input option: Yes. Connection of the main voltage signal (230 V~) to terminal S.
- Optional: "Zero Crossing" (switching the switch when the voltage passes through 0 V)
- Power consumption in the OFF/ON state Corresponds to the standard: 0.3 W / 0.6 W
EN 60669-2-1:2004 + A1:2009 + A12:2010 EN 60669-1:2018



EM31 / EM32

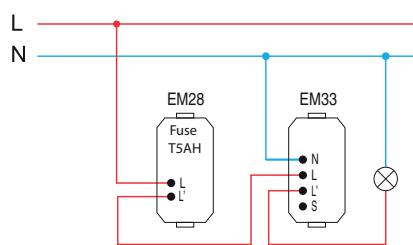


EM33

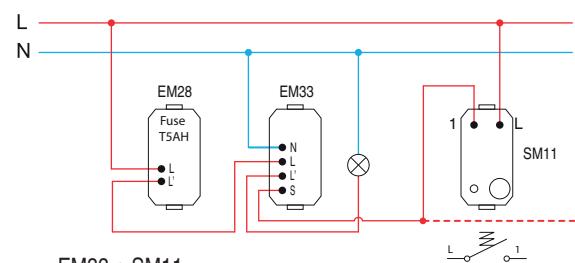


EM33 + SM11

E L E C T R O N I C S E M

EM31 / EM32

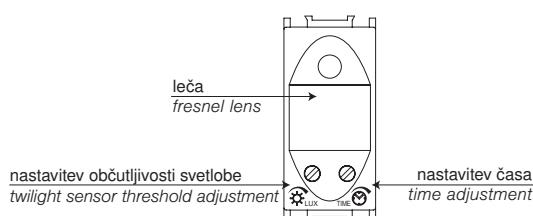


EM33

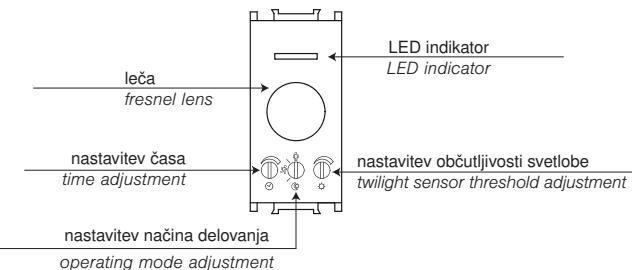

nastavitev občutljivosti in časa osvetlitve /
time and twilight adjustment

	EM31 / EM32	EM33	EM31 / EM32	EM33
	~ 5 LUX	~ 5 LUX	~ 200 LUX	~ 200 LUX
	~ 5 s	~ 10 s	~ 12 min	~ 12 min

načini delovanja EM33
EM33 operating mode

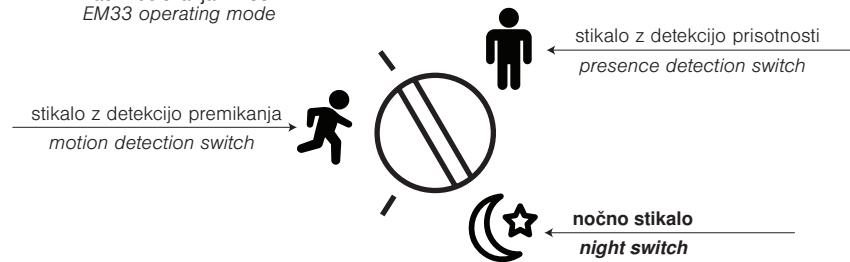

vrste bremen /
types of load

	1	2	3	4	5	6	7	8	9	10
EM31 EM32 EM33	min.	1 W	1 W	—	1 VA	—	—	1 W	1 W	1 VA
EM31 EM32	max.	800 W	800 W	5 A	6x20 VA	—	—	6x36 W	4x36 W	6x23 VA
EM33	max.	1000 W	1000 W	5 A	650 VA	650 VA	2 A	—	—	100 VA

1 - žarnica z žarilno nitko /
incandescent lamp

3 - uporovno gredno telo /
resistive heating element

5 - klasični transformator /
classical transformer

7 - fluorescentna cev (izvedba 1) /
fluorescent tube (version 1)

2 - halogenska žarnica /
halogen lamp

4 - elektronski transformator /
electronic transformer



6 - motor/
motor

8 - fluorescentna cev (izvedba 2) /
fluorescent tube (version 2)


9 - varčna CFL sijalka /
energy saving CFL lamp

10 - LED sijalka /
LED lamp


območje zaznavanja /
detection range

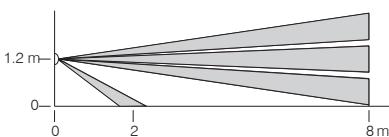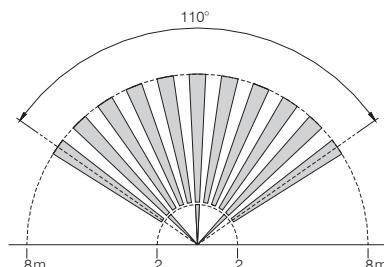


opozorila /
attention

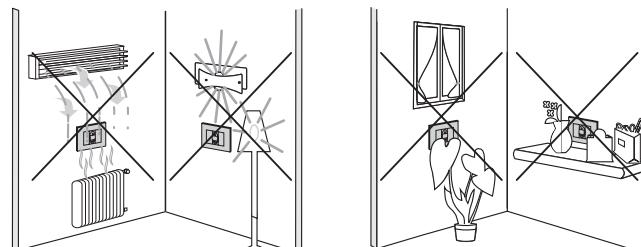

1M = 22,5 x 45
2M = 45 x 45

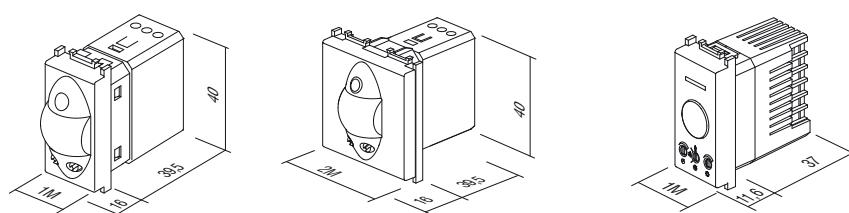

TERMOSTAT OGREVANJE 5(2)A 230V~ 2M

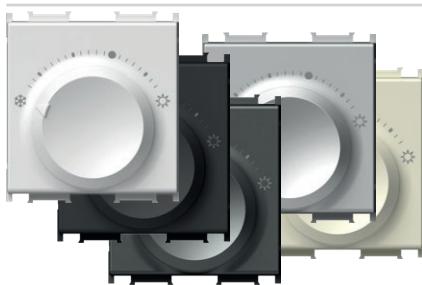


- EM38PW
- EM38MW
- EM38SB
- EM38AT
- EM38ES
- EM38IW


- način delovanja: ogrevanje
- napajanje: 230 V~, 50 Hz
- napetostni pulz: 4 kV
- poraba energije: < 0,5 W
- izhod: 2 A (max. 5 A); 230 V~, 50 Hz
- izhodni priključek: NO (max. 10 aktuatorjev)
- območje regulacije: +5 °C do +30 °C
- zaščita proti zmrzovanju: +5 °C
- histerезa: 0,5 K
- zaščita: IP30
- vrsta tipala: bimetal
- vrsta električnega priključka: vzmetni kontakti
- vrsta vodnikov:
- 0,75 - 1,5mm² (mehkožilni);
- 1,0 - 2,5 mm² (trdožilni)
- skladno z direktivo DIN EN 60730



HEATING THERMOSTAT 5(2)A 230V~ 2M

- operation mode: heating
- power supply: 230 V~, 50 Hz
- voltage pulse: 4 kV
- energy consumption: < 0.5 W
- output: 2 A (max. 5 A); 230 V~, 50 Hz
- switching output: NO (max. 10 actuators)
- regulation range: +5°C to +30°C
- frost protection: +5°C
- hysteresis: 0.5 K
- protection: IP30
- sensor type: Bimetal
- type of electrical connection: Spring-loaded contacts
- type of conductors: 0.75 – 1.5 mm² (flexible-stranded core);
1.0 – 2.5 mm² (solid core)
- in compliance with Directive DIN EN 60730

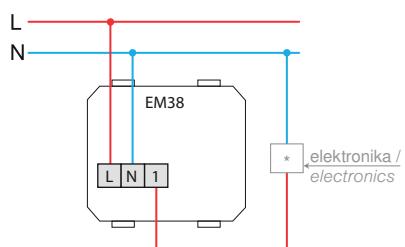

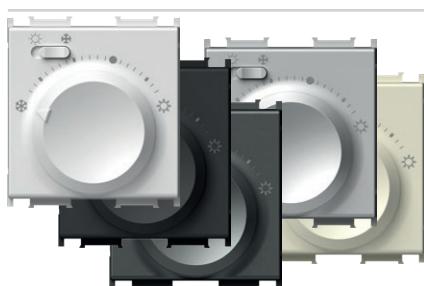

- EM39PW
- EM39MW
- EM39SB
- EM39AT
- EM39ES
- EM39IW


TERMOSTAT OGREVANJE/HLAJENJE 3(1,5)A 230V~ 2M

- način delovanja: ogrevanje/hlajenje
- napajanje: 230 V~, 50 Hz
- napetostni pulz: 4 kV
- poraba energije: < 0,5 W
- izhod: 1,5 A (max. 3 A); 230 V~, 50 Hz
- izhodni priključek: preklopno stikalo (max. 5 aktuatorjev)
- območje regulacije: +5 °C do +30 °C
- zaščita proti zmrzovanju: +5 °C
- histerezis: 0,5 K
- zaščita: IP30
- vrsta tipala: bimetal
- vrsta električnega priključka: vzmetni kontakti
- vrsta vodnikov: 0,75 - 1,5mm² (mehkožilni); 1,0 - 2,5 mm² (trdožilni)
- skladno z direktivo DIN EN 60730




HEATING/COOLING THERMOSTAT 3(1,5)A 230V~ 2M

- operation mode: cooling/heating
- power supply: 230 V~, 50 Hz
- voltage pulse: 4 kV
- energy consumption: < 0.5 W
- output: 1 A (max. 3 A); 230 V~, 50 Hz
- switching output: mode selector switch (max. 5 actuators)
- regulation range: +5°C to +30°C
- frost protection: +5°C
- hysteresis: 0.5 K
- protection: IP30
- sensor type: Bimetal
- type of electrical connection: Spring-loaded contacts
- type of conductors: 0.75 - 1.5mm² (flexible-stranded core); 1.0 - 2.5 mm² (solid core)
- in compliance with the Directive DIN EN 60730

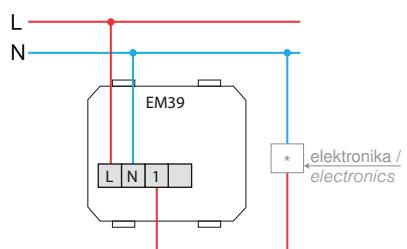

2M = 45 x 45

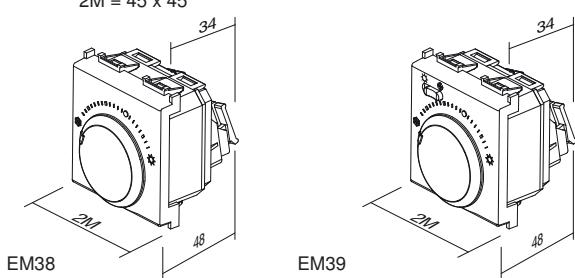

NOSILEC Z VIJAKI ZA TERMOSTATE FANTINI COSMI 3M

NM39



- nosilec z vijaki za termostate Fantini Cosmi 3M
- namenjen za uporabo z dnevнимi termostati Fantini Cosmi za modela CH121 in CH123
- namenjen za uporabo s tedenskimi termostati Fantini Cosmi za modela CH141A in CH143A
- montaža v pravokotne doze velikosti 3M
- primeren za sestavo z okvirji PURE, Line, Soft



MOUNTING FRAME WITH SCREWS FOR FANTINI COSMI THERMOSTATS 3M

- mounting frame with screws for Fantini Cosmi thermostats 3M
- suitable for use with Fantini Cosmi daily thermostats models CH121 and CH123
- suitable for use with Fantini Cosmi weekly thermostats models CH141A and CH143A
- for mounting in rectangular boxes 3M
- suitable for assembling with cover plates PURE, Line, Soft

KARTIČNO STIKALO 16 A / 230 V~, 50 Hz 3M





- EM46PW
- EM46MW
- EM46SB
- EM46AT
- EM46ES
- EM46IW

CARD SWITCH 16 A / 230 V~, 50 Hz 3M

- Napajalna napetost: 230 V~, 50 Hz
- Izvod: Rele 16 A / 230 V~, 50 Hz
- Presek žic: 0,75 – 4,0 mm²
- Temperatura delovanja: 0 do +40 °C
- Temperatura skladiščenja: -5 do +60 °C
- Funkcija: Kartično stikalo z zakasnjenim izklopom
- Zakasnitev izklopa: ~23 s
- Število priključkov: 6; 2x N, 2x L in 2x izvod (C in NO)
- Poraba v stanju OFF / ON: 0.5 W / 1.2 W



- Supply voltage: 230 V~, 50 Hz
- Output: Relay 16 A / 230 V~, 50 Hz
- Wire cross-section: 0.75 - 4.0 mm²
- Operating temperature: 0 to +40°C
- Storage temperature: -5 to +60°C
- Function: Card switch with a delayed break
- Break delay: ~ 23 s
- Number of ports: 6; 2x N, 2x L and 2x output (C and NO)
- Power consumption in the OFF/ON state: 0.5 W / 1.2 W

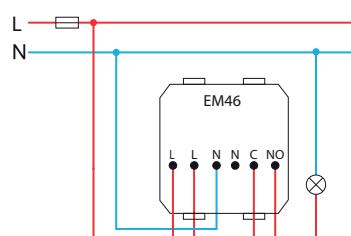

KARTIČNO STIKALO ZA VARČEVANJE Z ENERGIJO RF HF 13,56MHz 3M




■ EM44BK

- kartično stikalo elektronsko na RFID ISO kartico
- napajanje iz rele enote EM49 preko kabla s konektorji RJ12
- izhod za povezavo z rele enoto EM49
- zakasnitev izklopa "main power" ob izvlečenju kartice 15-20 s
- zakasnitev izklopa "HVAC" ob izvlečenju kartice pri odprtih balkonskih vratih ali oknu - 1 min
- ustreza EN 61000-6-1
- kartica ni priložena
- ni namenjeno kontroli pristopa




ENERGY SAVER CARD SWITCH RF HF 13,56MHz 3M

- electronic card switch for RFID ISO card
- supply from relay unit EM49 through cable connectors RJ12
- output to be connected to relay output unit EM49
- 15-20s "main power" switch off delay with card withdrawal
- 1 min "HVAC" switch off delay with card withdrawal when balcony doors or windows opened
- in accordance with EN 61000-6-1
- card is not included
- not for access control

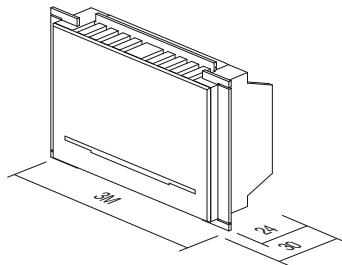

KARTICA ISO

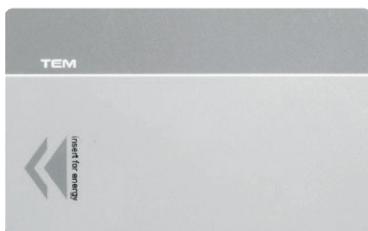


EM47

- ISO kartica
- za uporabo s kartičnim stikalom EM46
- velikost: 85x54 mm

CARD ISO

- ISO card
- for combination with card switch EM46
- size: 85x54 mm

RELE ENOTA ZA KARTIČNO STIKALO 2X16A 250V~

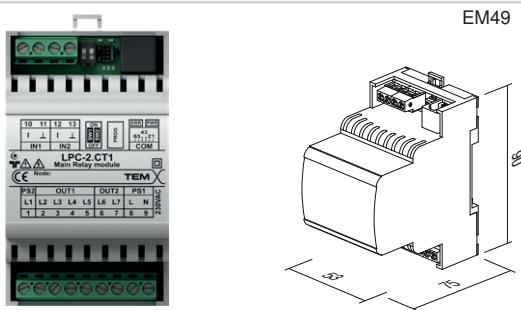

- rele enota za kartična stikala EM44
- napajanje 230V~ 50 Hz
- ustreza EN 61000-6-1
- montaža na DIN letev 35mm, 3MU
- vhodi in izhodi glede na vgradnjo: enosobno ali dvosobno

ENERGY SAVER CONTROL UNIT 2x16A 250V~

- relay unit for card switches EM44
- supply voltage 230V~ 50Hz
- in accordance with EN 61000-6-1
- mounting on DIN rail 35mm, 3MU
- input and output depending on implementation: single or double room



RAZDELILNIK SPL-1




EM45

- za povezavo dveh kartičnih stikal EM44 z rele enoto EM49
- komunikacijski konektor RJ12
- velikost: 37 x 30 x 27 mm


SPLITTER SPL-1

- used to connect two peripheral modules EM44 to relay unit EM49
- communication connector RJ12
- size: 37 x 30 x 27 mm


vezalna shema za enosobno delovanje /
wiring diagram for single room implementation

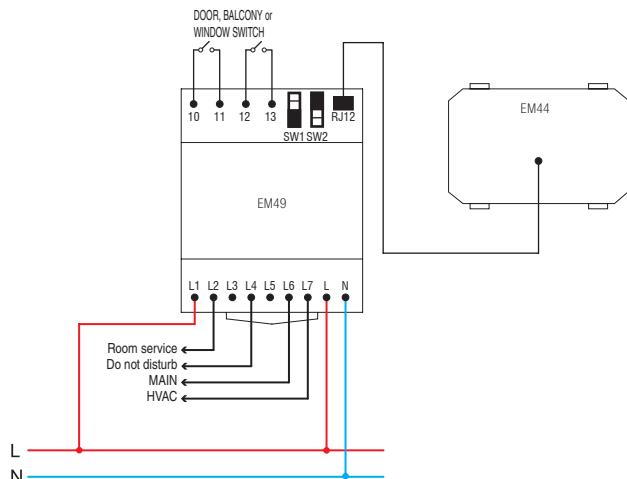


vezalna shema za dvosobno delovanje /
wiring diagram for double room implementation

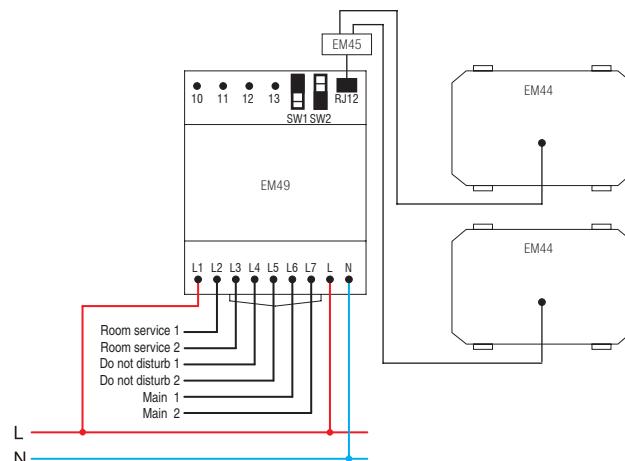


povezovalni kabel RJ12 med EM44 in EM49 /
connection cable RJ12 between EM44 and EM49

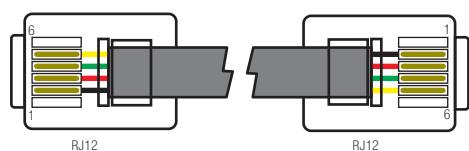

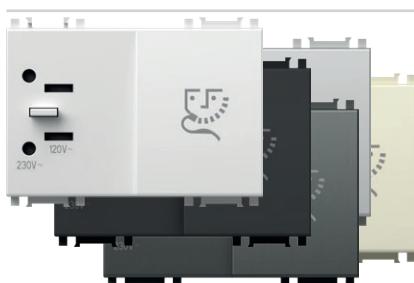

- EM60PW
- EM60MW
- EM60SB
- EM60AT
- EM60ES
- EM60IW




VTIČNICA ZA BRIVNIK 230V~/120V~ 3M

- vtičnica za brivnik z ločilnim transformatorjem 20VA
- vhod: 230V~ 50-60Hz
- izhod:
- 230V~ za 2P 2,5A EURO vtič ali 120V~ za 2P 15A ameriški vtič
- razred zaščite II
- ustreza EN 61558-2-5

SOCKET SHAVER 230V~/120V~ 3M

- shaver supply unit with isolating transformer 20VA
- supply: 230V~ 50-60Hz
- output:
- 230V~ for 2P 2.5A Europlug or 120V~ for 2P 15A American plug
- Class II
- in accordance with EN 61558-2-5



LED ZASILNA SVETILKA 230V~50Hz, 0.5W, NiMH 2h 2M

EM57





- zasilna LED svetilka
- možnost uporabe kot prenosne ročne svetilke (izvlečni mehanizem)
- napajanje 230V~ 50Hz 1xLED 0.5W
- NiMH akumulator 3,6V 140mAh, zamenljiv
- avtonomija 2 h, polnjenje 36 h
- varnostni razred naprave II
- ustreza EN60598-1, en60598-2-2, EN62471, EN55015:2006, EN61547



LED EMERGENCY LIGHT 230V~50Hz, 0.5W, NiMH 2h 2M

- emergency LED lamp
- option to use it as a hand lamp (pull-out mechanism)
- supply voltage 230V~50Hz, 1xLED 0.5W
- NiMH accumulator 3,6V 140mAh, replaceable
- autonomy 2h, charging 36h
- class device II
- in accordance EN60598-1, EN60598-2-2, EN62471, EN55015:2006, EN61547





□ EM55


LED ZASILNA SVETILKA 250V~ 0.9W, NiCd 3h 7M

- zasilna LED svetilka
- napajanje 250V~ 50Hz 3xLED 0,3W, 10000mcd, 6500K
- NiCd akumulator 4,8V 400 mAh, zamenljiv
- avtonomija 3h, polnenje 24h
- razred zaščite II
- ustreza EN 60598-1, EN 60598-2-2, EN 60598-2-22




LED EMERGENCY LIGHT 250V~ 0.90W, NiCd 3h 7M

- emergency LED lamp
- supply voltage 250V~ 50Hz 3x LED 0,3W, 10000mcd, 6500K
- NiCd accumulator 4,8V 400 mAh, replaceable
- autonomy 3h, charging 24h
- Class II
- in accordance with EN 60598-1, EN 60598-2-2, EN 60598-2-22

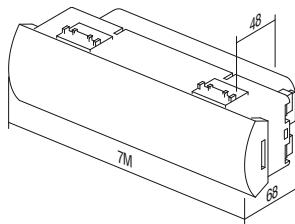

7M = 157 X 45

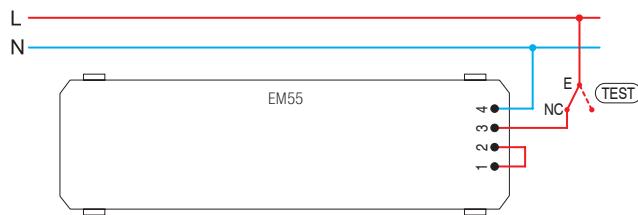




- EM69PW
- EM69MW
- EM69SB
- EM69AT
- EM69ES
- EM69IW

POLNILNIK USB PD 20W

- USB napajalnik z dovajanjem moči do 20W.
 - za polnjenje elektronskih naprav prek standardnega USB priključka (kompatibilno tudi z Apple napravami)
 - napajanje: 100-230 V~ 50/60 Hz
 - poraba med delovanjem: 420 mA pri 100 V~/220 mA pri 230 V~
 - poraba v mirovanju: <100 mW pri 230 V~
 - izhodna moč: 20W Max
- Izhod:
- USB tip C: 5.0 VDC 3.0A; 9.0 VDC 2.2 A; 12.0 VDC 1.67 A (PD 20W)
 - USB tip A: 5.0 VDC 3.0A; 9.0 VDC 2.0 A; 12.0 VDC 1.5 A (QC 18W)
 - USB A+C: 5 VDC 3A
 - tip konektorja: 1 x USB A; 1 x USB C
 - povprečna učinkovitost v aktivnem stanju: 86 %
 - učinkovitost pri minimalnemu bremenu (10%): 81%
 - temperatura delovanja: 0 °C/+ 45 °C (notranja uporaba)
 - IP zaščitni razred: IP20, samo za notranjo uporabo
 - varnostni razred naprave II
 - prenapetostna zaščita (EN 60364-4-44): razred III
 - vijačna pritridle vodnikov max. 2.5 mm²
 - naprava z odmikom kontaktov min. 3 mm
 - ni primeren za vgradnjo v doze globine 45 mm in ohišja CUBO IP20



Ustreza:

Direktivam: BT, EMC, RoHS, ErP
Standardim: EN IEC 62368-1, EN 55032, EN55035, EN IEC 61000-3-2, EN 61000-3-3, EN 50563, EN IEC 63000
Dodatnim regulativam: (EU) n. 2019/1782 REACH, n. 1907/2006 – art.33. Produkt lahko vsebuje sledi svinca.

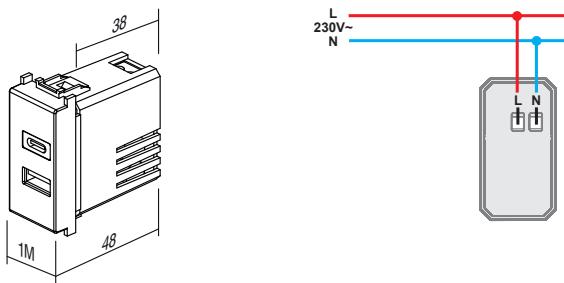

USB POWER SUPPLY UNIT PD 20W

- 20 W USB power delivery power supply unit
 - for charging of electronic devices via a standard USB port (also compatible with Apple devices)
 - power supply: 100-230V~ 50/60Hz
 - power consumption: 420mA at 100V~/220mA at 230V~
 - standby power consumption: <100mW at 230V~
 - Output power: 20 W Max
 - Output:
 - USB tip C: 5.0 VDC 3.0A; 9.0 VDC 2.2 A; 12.0 VDC 1.67 A (PD 20W)
 - USB tip A: 5.0 VDC 3.0A; 9.0 VDC 2.0 A; 12.0 VDC 1.5 A (QC 18W)
 - USB A+C: 5 VDC 3A - connector type: 1x USB A; 1x USB C
 - average efficiency in active mode: 86%
 - efficiency with low load (10%): 81%
 - operating temperature: 0 °C/+45 °C (indoor use)
 - IP protection class: IP20, indoor use only
 - class device II
 - overvoltage category (EN 60364-4-44): Class III
 - screw contacts: max. 2.5 mm²
 - device with a contact gap of at least 3mm
- Conformity:
- Directive: BT, EMC, RoHS, ErP
Standards: EN IEC 62368-1, EN 55032, EN55035, EN IEC 61000-3-2, EN 61000-3-3, EN 50563, EN IEC 63000
External power supplies regulation: (EU) n. 2019/1782 REACH, n. 1907/2006 – art.33. The product may contain traces of lead.



- EM50WH
- EM50BL
- EM50RD
- EM50GR


LED AMBIENTALNA ENOTA ENOBARVNA 250V~ 0,8W 2M

- LED ambientalna enota za stopnišča in hodnike
- napajanje 230V~ 50Hz 0,8W, 6500K
- razred zaščite II
- ustreza EN 60598-1
- uporaba tudi za usmerjanje ali signalizacijo z možnostjo laserskega tiska poljubne grafike



LED AMBIENT UNIT MONOCOLOUR

- 250V~ 0,8W 2M
 - step marker LED unit
 - supply voltage 230V~ 50Hz 0,8W, 6500K
 - Class II
 - in accordance with EN 60598-1
 - optional usage for directional signalization with customized laser printing on diffuser



- EM51RG


SVETILKA LED DVOBARVNA 250V~ 2x0,4W 2M

- LED dvobarvna svetilka (rdeča/zelena) za signalizacijo
- napajanje 230V~ 50Hz 2x0,4W, 6500K
- razred zaščite II
- ustreza EN 60598-1
- vsebuje grafiko kot na sliki
- možnost laserskega tiska poljubne grafike



LED LAMP DUAL COLOR 250V~ 2x0,4W 2M

- signaling dual color (red/green) LED lamp
 - supply voltage 230V~ 50Hz 2x0,4W, 6500K
 - Class II
 - in accordance with EN 60598-1
 - diffuser includes graphics as shown
 - possible customized laser printing on diffuser



- EM52RG
- EM52RG90
- EM52RG91
- EM52RG99





SVETILKA LED 3D DVOBARVNA 250V~ 2x0,4W 2M


- LED dvobarvna svetilka (rdeče/zelena) s 3D simbolom, za signalizacijo
- napajanje 230V~ 50Hz 2x0,4 W, 6500K
- razred zaščite II
- ustreza EN 60598-1
- možnost tiska različnih grafik po naročilu
- 90 moški simbol, 91 ženski simbol, 99 simbol po naročilu



LED LAMP 3D DUAL COLOR 250V~ 2x0,4W 2M

- signalling LED lamp, dual color (red/green) with 3D symbol
 - supply voltage 230V~ 50Hz 2x0,4W, 6500K
 - class II
 - in accordance with EN 60598-1
 - possible customized graphics on request
 - 90 male symbol, 91 female symbol, 99 symbol on request

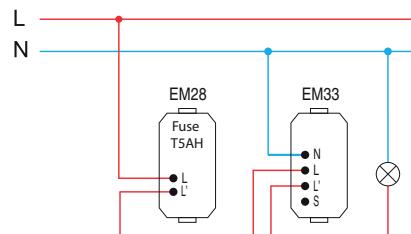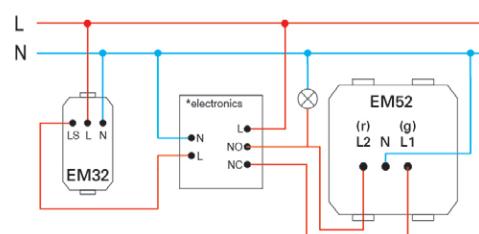

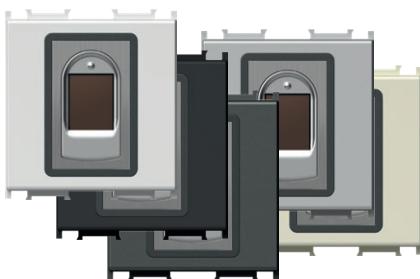

- EM71PW
- EM71MW
- EM71SB
- EM71AT
- EM71ES
- EM71IW

STIKALO NA PRSTNI ODTIS BIOPASS 2M





- stikalo na prstni odtis v kompletu z notranjo relo enoto in napajalnikom
- kapaciteta: 500 prstnih odtisov
- enostavno upravljanje prek mobilne aplikacije X-Manager
- napajalna napetost:

 - 8-30 V – DC ali AC (napajalnik priložen)
 - kapacitivni senzor
 - 2 izhodna relaja
 - maksimalna napetost/tok na releju: 40V/3A
 - čas proženja releja: 1 - 10 s
 - maksimalna moč: 3,6 W
 - Temperaturno območje delovanja: -30 °C do +80 °C
 - Maksimalna vlažnost okolice do: 100 % IP65
 - 256-bitna enkripcija povezave med stikalom in notranjo relo enoto
 - Set vključuje tudi nosilec NM24 in dekorativni okvir OS20.

FINGERPRINT SWITCH BIOPASS 2M


- fingerprint switch with included internal relay unit and power supply
- capacity: 500 fingerprints
- easy management via X-Manager mobile app
- power supply voltage: 8-30V – DC or AC (power supply included)
- capacitive sensor
- 2 output relays
- maximum voltage/current on relay: 40V/3A
- relay triggering time: 1-10 sec
- maximum power: 3,6W
- 256-bit encrypted link between switch and internal relay unit
- Set also includes NM24 mounting frame and OS20 decorative cover plate.

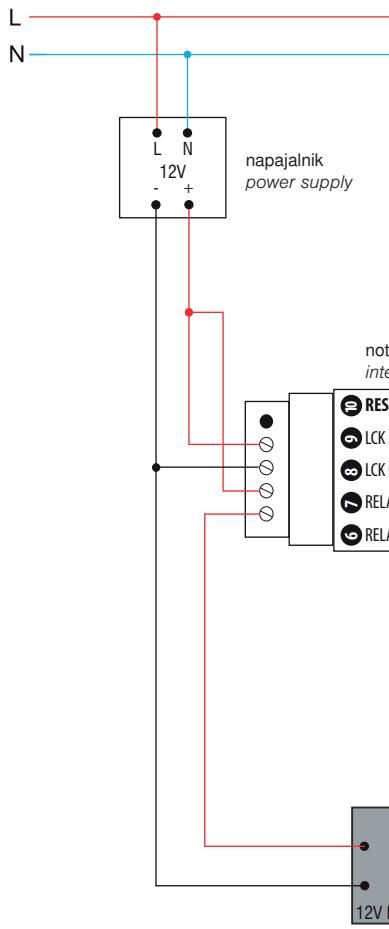

X-Manager app



zunanja enota
exterior unit







- EM82PW
- EM82MW
- EM82SB
- EM82AT
- EM82ES
- EM82IW




VEČOPRIVALNO ČASOVNO STIKALO EM82

- Napajalna napetost: 230 V~, 50Hz
- Izvod: Rele 16 A / 250 V~, 50Hz
- Presek žic: 0,75 – 4,0 mm²
- Temperatura delovanja: 0 do +40 °C
- Temperatura skladisčenja: -5 do +60 °C
- Funkcije: **Casovnik, Rele (krmiljeno stikalo), Stikalo, Tipkalo**
- Indikacija programa / stanja: RGB LED
- Število tipk: 2
- Vrsta delovanja tipke: Kapacitivno
- Število priključkov: 6 - 2x N, 2x L, 1x Izvod (L'), 1x Krmiljen vhod (S)
- Možnost krmiljenega vhoda: Da. Priključitev signala omrežne napetosti (230 V~) na sponko S
- Implementirano delovanje »zero crossing« (preklop stikala ob prehodu napetosti skozi 0 V)
- Poraba v stanju OFF / ON: 0.3 W / 1.0 W
- Stikalo EM82 NI PRIMERNO za vgradnjo v podometne doze globine 45 mm in ohišja CUBO IP20.
- Stikalo je namenjeno za uporabo v notranjih prostorih, zaščitenih pred vplivom vlage.

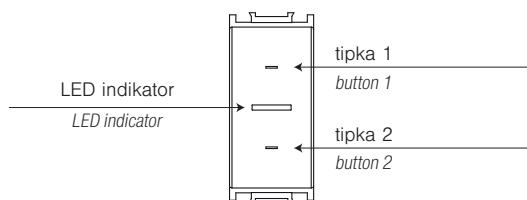


MULTIPURPOSE TIMER SWITCH EM82


- Supply voltage: 230 V~, 50Hz
- Output: Rele 16 A / 250 V~, 50Hz
- Wire cross section: 0,75 – 4,0 mm²
- Operating temperature: 0 to + 40 °C
- Storage temperature: -5 to + 60 °C
- Functions: **Timer, Relay (controlled switch), Switch, Push button**
- Program/status indication: RGB LED
- Number of buttons: 2
- Push button operation type: Capacitive
- Number of ports: 6 - 2x N, 2x L, 1x Output (L'), 1x Controlled input (S)
- Controlled input option: Yes. Connection of the main voltage signal (230 V~) to terminal S
- Implemented "zero crossing" operation (switching the switch when the voltage passes through 0 V)
- Power consumption in the OFF / ON state: 0.3 W / 1.0 W
- The EM82 switch is NOT SUITABLE for installation in concealed boxes with a depth of 45 mm and CUBO IP20 housing.
- The switch is intended for indoor use, protected from moisture.





N Nevtralni vodnik
L Fazni vodnik
L' Izvod (krmiljena faza)
S Vhodni krmilni signal (230 V~)



EM82 is in a SWITCH or a TIMER mode

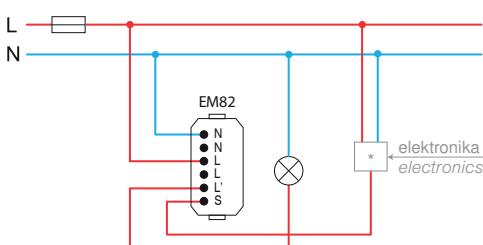

EM82 is in a RELAY mode

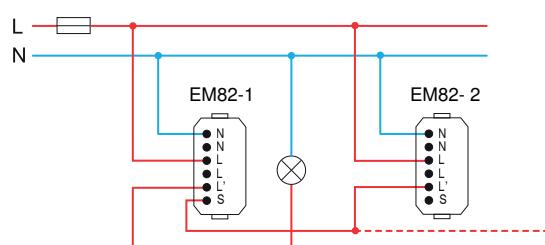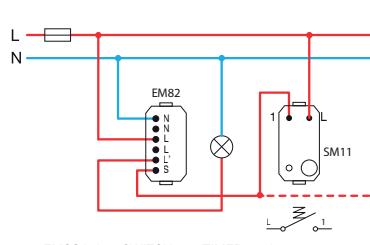EM82-1 is in a SWITCH or a TIMER mode
EM82-2 is in a PUSH BUTTON mode

EM82 is in a SWITCH or a TIMER mode


	1	2	3	4	5	6	7	8
Max.	16 A	16 A	16 A	8 A	8 A	5 A	200 VA	200 VA

1 - incandescent lamp
2 - halogen lamp

3 - resistive heating element
4 - electronic transformer


5 - classical transformer
6 - motor

7 - energy saving CFL lamp
8 - LED lamp




E L E C T R O N I C S E M


Operation of the control signal S – MODE 1

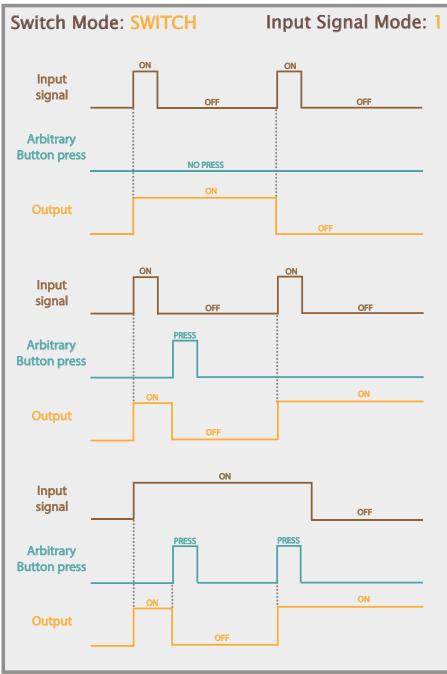


Display of the operation of the external signal S and buttons in the SWITCH operating mode and external signal in MODE 1

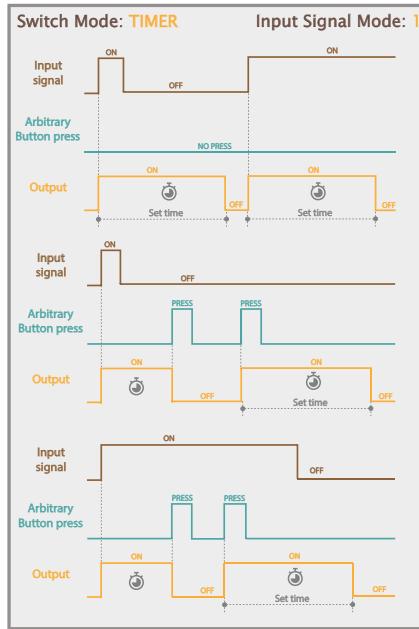


Display of the operation of the external signal S and buttons in the TIMER operating mode and external signal in MODE 1

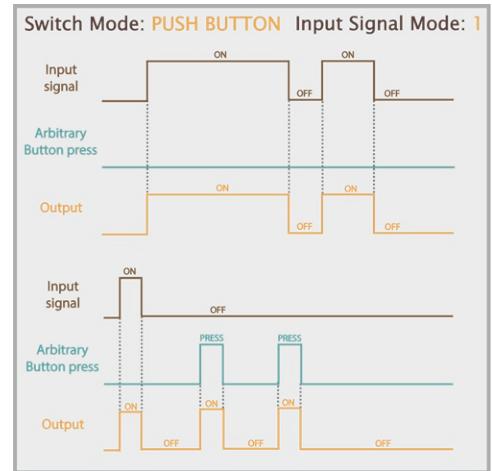

Display of the operation of the external signal S and buttons in the PUSH BUTTON operating mode and external signal in MODE 1

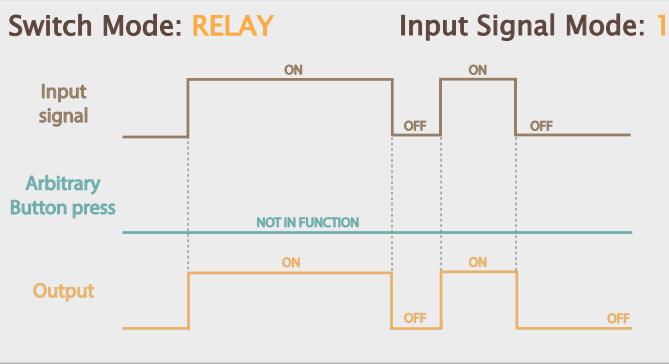


Display of the operation of the external signal S and buttons in the RELAY operating mode and external signal in MODE 1

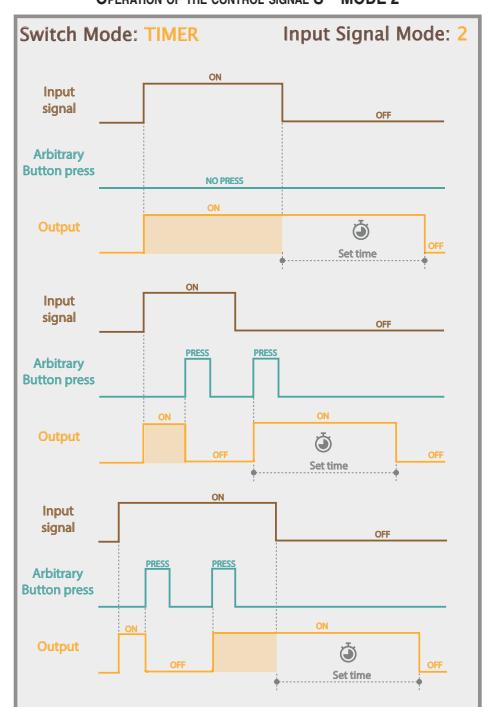

Display of the operation of the external signal S and buttons in the TIMER operating mode and external signal in MODE 2


Operating mode settings of the external control signal S

Selecting MODE 1 for input signal

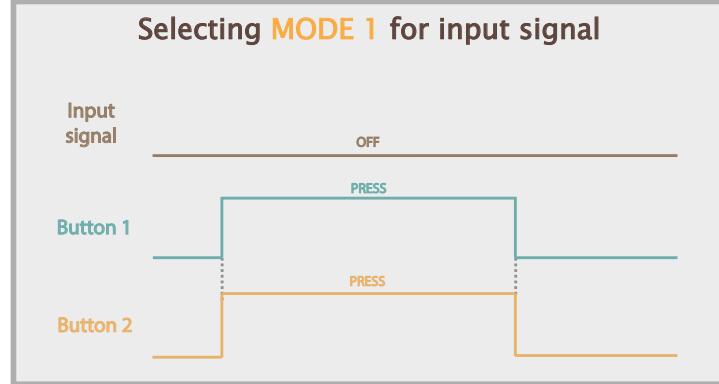


Setting the operating mode of the input signal S for MODE 1

Selecting MODE 2 for input signal

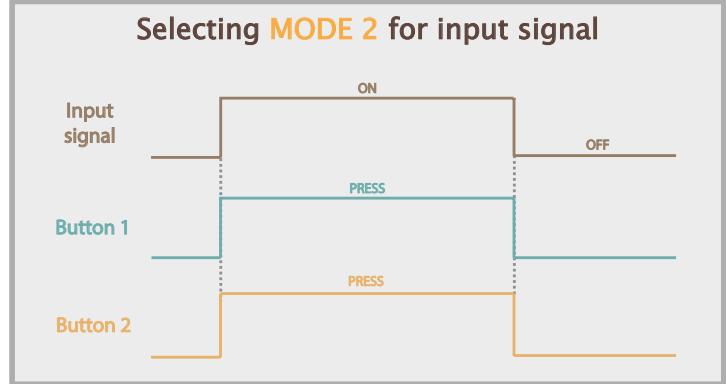


Setting the operating mode of the input signal S for MODE 2

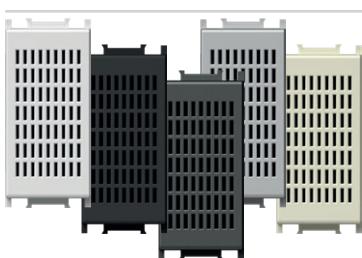

- EM90PW
- EM90MW
- EM90SB
- EM90AT
- EM90ES
- EM90IW

BRENČAČ 8VA 230V~ 1M


- signalni brenčač
 - dolžina zvoka je enaka dolžini pritiska na tipko
 - napajanje 230V~ 50Hz 8VA
- BUZZER 8VA 230V~1M**
- signal buzzer
 - the sound emission has the same lasting time as the control operation
 - supply voltage 230V~ 50Hz 8VA

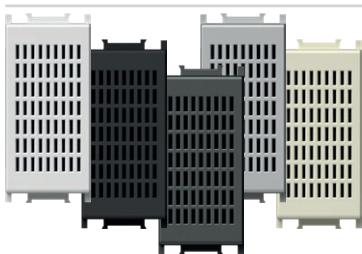

- EM91PW
- EM91MW
- EM91SB
- EM91AT
- EM91ES
- EM91IW

BRENČAČ 8VA 12V~ 1M

- signalni brenčač
 - dolžina zvoka je enaka dolžini pritiska na tipko
 - napajanje 12V~ 50Hz 8VA
- BUZZER 8VA 12V~1M**
- signal buzzer
 - the sound emission has the same lasting time as the control operation
 - supply voltage 12V~ 50Hz 8VA

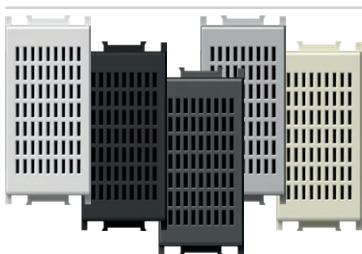


- EM92PW
- EM92MW
- EM92SB
- EM92AT
- EM92ES
- EM92IW

ZVONEC 8VA 230V~ 1M

- signalni zvonec
 - dolžina zvoka je enaka dolžini pritiska na tipko
 - napajanje 230V~ 50Hz 8VA
- BELL 8VA 230V~1M**
- signal bell
 - the sound emission has the same lasting time as the control operation
 - supply voltage 230V~ 50Hz 8VA



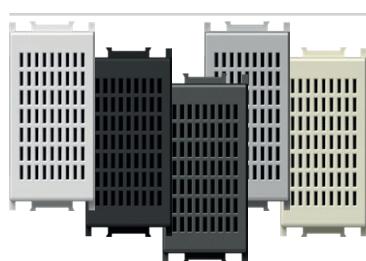


- EM93PW
- EM93MW
- EM93SB
- EM93AT
- EM93ES
- EM93IW

ZVONEC 8VA 12V~ 1M

- signalni zvonec
- dolžina zvoka je enaka dolžini pritiska na tipko
- napajanje 12V~ 50Hz 8VA

BELL 8VA 12V~1M



- signal bell
- the sound emission has the same lasting time as the control operation
- supply voltage 12V~ 50Hz 8VA

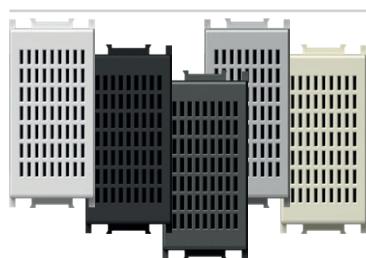

- EM94PW
- EM94MW
- EM94SB
- EM94AT
- EM94ES
- EM94IW



ELEKTRONSKI ZVONEC 230V~ 6mA rms 1M

- napajanje 230 V~ 50/60 Hz
- poraba melodija 1: 4,7 mA rms
- poraba melodija 2: 5,9 mA rms
- nivo zvoka melodija 1: 90,5 dB
- nivo zvoka melodija 2: 86 dB
- temperaturna delovanja: 0°C/45 °C (notranja uporaba)
- temperatura skladisčenja -20°C /50 °C
- IP zaščitni razred : IP20 (samo za notranjo uporabo)
- varnostni razred naprave II
- prenapetostna zaščita (EN62109): razred III
- vijačna pritrditev vodnikov max. 2,5 mm²
- naprava z odmikom kontaktov min. 3mm
- zvonec mora biti varovan z ustreznim zunanjim odklopnikom
- direktivi EMC in LVD

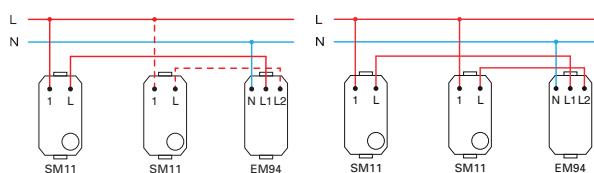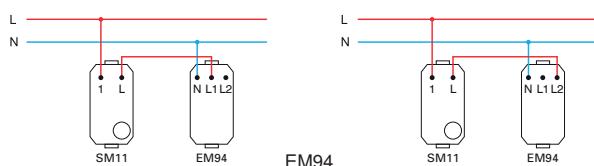

ELECTRONIC BELL 230V~ 6mA rms 1M

- power supply 230 V~ 50/60 Hz
- power consumption when playing melody 1: 4.7 mA rms
- power consumption when playing melody 2: 5.9 mA rms
- sound level of melody 1: 90.5 dB
- sound level of melody 2: 86 dB
- operating temperature 0°C/45°C (indoor use)
- storage temperature: -20°C /50°C
- IP protection class: IP20 (indoor use only)
- class device II
- overvoltage category (EN62109): Class III
- screw contacts: max. 2.5 mm²
- device with a contact gap of at least 3 mm
- an easily accessible cut-off switch must be installed upstream from bell
- complies with EMC & LVD directives

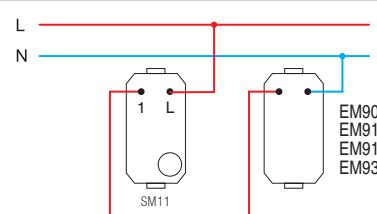




- EM95PW
- EM95MW
- EM95SB
- EM95AT
- EM95ES
- EM95IW

REGULATOR GLASNOSTI ZA 100V AVUDIO LINIJO 35W 2M

- regulator glasnosti (attenuator) za 100V avudio sisteme
- nazivna moč 35W (max. 45W), 6 stopenjska nastavitev glasnosti
- primeren za vgradnjo v globoke doze (min. 60 mm)
- ni primeren za vgradnjo v doze globine 45 mm in ohišja CUBO IP20
- samo za notranjo uporabo

VOLUME CONTROL 100V AUDIO LINE 35W 2M

- volume control (attenuator) for 100V audio systems
- power rating 35W (max. 45W), 6 steps volume control
- suitable for boxes min. 60 mm deep
- not suitable for installation in 45 mm deep boxes and surface mount boxes CUBO IP20
- for indoor use only

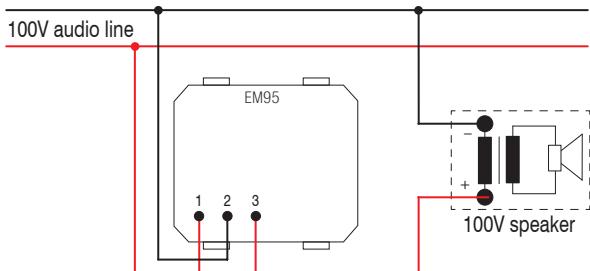



- EM96PW
- EM96MW
- EM96SB
- EM96AT
- EM96ES
- EM96IW

REGULATOR GLASNOSTI NIZKOOHMSKI 4-8 Ω 35W 2M

- regulator glasnosti za nizkonapetostne izhode 4-8 Ω 35W
- za priklop na Hi-Fi naprave
- nazivna moč 35W, 6 stopenjska nastavitev glasnosti
- primeren za vgradnjo v globoke doze (min. 60 mm)
- ni primeren za vgradnjo v doze globine 45 mm in ohišja CUBO IP20
- samo za notranjo uporabo

VOLUME CONTROL 4-8 Ω 35W 2M

- volume control (attenuator) for low voltage outputs 4-8 Ω, 35W
- power rating 35W, 6 steps volume control
- suitable for boxes min. 60 mm deep
- not suitable for installation in 45 mm deep boxes and surface mount boxes CUBO IP20
- for indoor use only

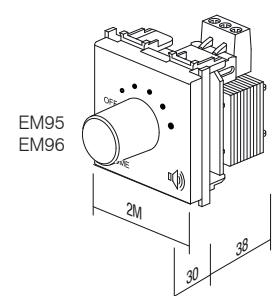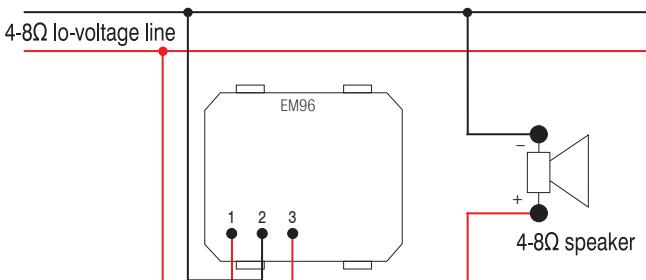




CM25

PW

OS


tip type	naziv description	tehnični opis technical data	velikost size	barva colour	opcijski opis 1 optional data 1
CM10	SET VTIČNIC 2x SCHUKO SOCKET SET 2x SCHUKO	2P+E 16A 250V~ 4M		<input type="checkbox"/> PW bela-sijaj polar white	<input type="checkbox"/> OL okvir LINE cover plate LINE
CM11	SET VTIČNIC 3x SCHUKO SOCKET SET 3x SCHUKO	2P+E 16A 250V~ 7M		<input type="checkbox"/> MW bela-mat matte white	<input type="checkbox"/> OS okvir SOFT cover plate SOFT
CM15	SET VEZNNIKOV BARVNI LINK WIRE SET	3x1.5mm ²	1M	<input checked="" type="checkbox"/> SB črna-mat soft touch black	
.	.	.	.	<input type="checkbox"/> AT antracit anthracite	
.	.	.	.	<input type="checkbox"/> ES srebrna elox silver	
.	.	.	.	<input type="checkbox"/> IW bež-sijaj ivory white	

SET VTIČNIC 2x SCHUKO 2P+E 16A 250V~ 4M

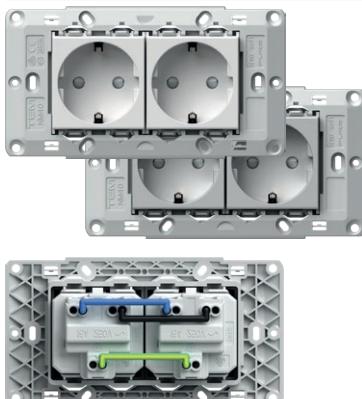


CM10PW
 CM10ES

- set vtičnic 2x schuko VM10 2P+E 16A 250V~
- vtičnici povezani z vezniki CM16
- z nosilcem 4M brez vijakov
- za pritrdiritev nosilcev uporabiti vijake CM17, CM18 ali CM19
- vijačna pritrdiritev vodnikov 1.5-2.5 mm²
- ustrez IEC 60884-1, CEE7

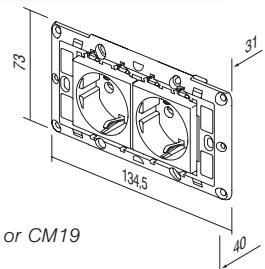

SOCKETS SET 2x SCHUKO 2P+E 16A 250V~ 4M


- socket set 2x schuko VM10 2P+E 16A 250V~
- prewired with link wires CM16
- with mounting frame 4M without screws
- for mounting frame fixing use screws CM17, CM18 or CM19
- screw contacts 1.5-2.5 mm²
- in accordance with IEC-60884-1, CEE7

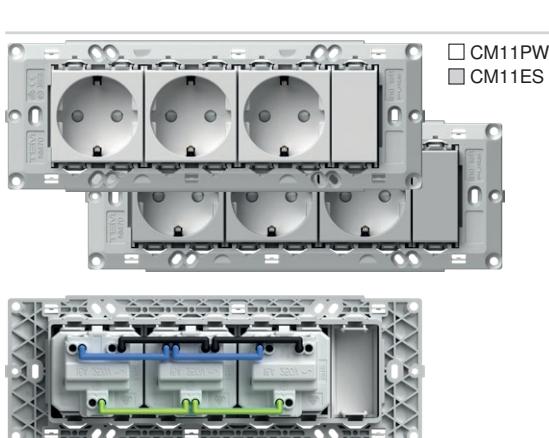

CM11PW
 CM11ES


SET VTIČNIC 3x SCHUKO 2P+E 16A 250V~ 7M

- set vtičnic 3x schuko VM10 2P+E 16A 250V~
- vtičnice povezane z vezniki CM16
- z nosilcem 7M brez vijakov
- za pritrdiritev nosilcev uporabiti vijake CM17, CM18 ali CM19
- vijačna pritrdiritev vodnikov 1.5-2.5 mm²
- ustrez IEC 60884-1, CEE7



SOCKETS SET 3x SCHUKO 2P+E 16A 250V~ 7M

- socket set 3x schuko VM10 2P+E 16A 250V~
- prewired with link wires CM16
- with mounting frame 7M without screws
- for mounting frame fixing use screws CM17, CM18 or CM19
- screw contacts 1.5-2.5 mm²
- in accordance with IEC-60884-1, CEE7





CM15

SET VEZNIKOV BARVNI 3x1.5mm² 1M

- set veznikov za povezavo dveh elementov velikosti 1M
- vsebuje 10 črnih, 10 modrih in 10 rumeno-zelenih veznikov

LINK WIRE SET 3x1.5mm² 1M

- link wire set to connect two elements size 1M
- includes 10 black, 10 blue and 10 yellow/green wires




CM16

SET VEZNIKOV BARVNI 3x2.5mm² 2M

- set veznikov za povezavo dveh elementov velikosti 2M
- vsebuje 10 črnih, 10 modrih in 10 rumeno-zelenih veznikov


LINK WIRE SET 3x2.5mm² 2M

- link wire set to connect two elements size 2M
- includes 10 black, 10 blue and 10 yellow/green wires

CM17
CM18
CM19


SET VIJAKOV 3,5

- set vijakov za pritrditev nosilcev setov NM30, NM32, NM40, NM41, NM70
- CM17 - l=20mm, 100kos
- CM18 - l=35mm, 50kos
- CM19 - l=50mm, 50kos



SCREW SET 3,5

- screw set for fixing mounting frames NM30, NM32, NM40, NM41, NM70
- CM17 - l=20mm, 100pcs
- CM18 - l=35mm, 50pcs
- CM19 - l=50mm, 50pcs

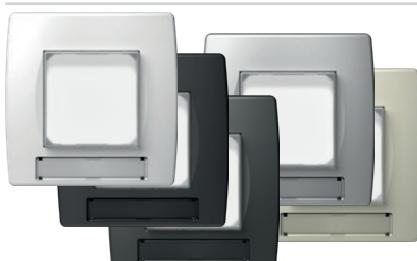

- CM22PW
 CM22MW
 CM22SB
 CM22AT
 CM22ES
 CM22IW


SET ZA STIKALA Z NAPISNO PLOŠČICO IP44 2M

- za vgradnjo v vlažne prostore
- IP44 zaščito zagotavlja za vsa stikala Modul
- stikala in tipke niso sestavni del seta
- vsebuje okvir SOFT 2M z napisno ploščico in nosilec
- ustreza IEC 60669-1



SET SWITCHES WITH INSCRIPTION PLATE IP44 2M

- for usage in humid areas
- IP44 protection provides for all Modul switches
- switches and buttons are not part of the set
- include SOFT 2M cover plate with inscription plate and mounting frame
- in accordance with IEC 60669-1

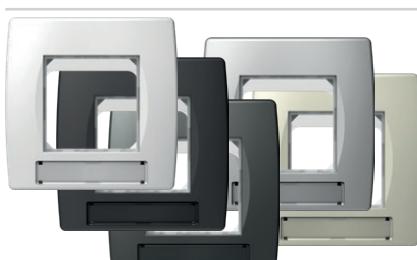

- CM23PW
 CM23MW
 CM23SB
 CM23AT
 CM23ES
 CM23IW


SET ZA VTIČNICE Z NAPISNO PLOŠČICO IP44 2M

- za vgradnjo v vlažne prostore
- IP44 zaščito zagotavlja le v kombinaciji z vtičnico s pokrovom (VM11, VM41)
- vtičnice niso sestavni del seta
- vsebuje okvir SOFT 2M z napisno ploščico in nosilec
- ustreza IEC 60884-1



SET SOCKETS WITH INSCRIPTION PLATE IP44 2M


- for usage in humid areas
- IP44 protection can be achieved only in combination with covered socket (VM11, VM41)
- sockets are not part of the set
- include SOFT 2M cover plate with inscription plate and mounting frame
- in accordance with IEC 60884-1

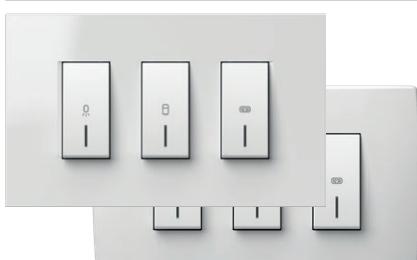

- CM25PWOL
 CM25IWOL
 CM25PWOS
 CM25IWOS

KOPALNIŠKI SET 3x20A 250V~ 4M

- set stikal 3xSM12 20A 250V~ z nosilcem in okvirjem
- vijačna pritrditev vodnikov 1.5-2.5mm²
- ustreza EN 60669-1
- možnost pritrditve na že vgrajene doze pritrditvenih mer od 108 do 135mm ali na doze velikosti 4M
- višina okvirja 90mm



SWITCH SET FOR BATHROOM 3x20A 250V~ 4M

- switch set 3xSM12 20A 250V~ with mounting frame and cover plate
- screw contacts 1.5-2.5mm²
- in accordance with EN 60669-1
- universal solution for renovation on boxes with fixing dimensions 108-135mm or boxes 4M size
- cover plate height 90mm



- CM28PW
- CM28MW
- CM28SB
- CM28AT
- CM28ES
- CM28IW

SET ZA STIKALA IP44 2M


- za vgradnjo v vlažne prostore
- IP44 zaščito zagotavlja za vsa stikala Modul
- stikala in tipke niso sestavni del seta
- okvir SOFT 2M brez napisne ploščice
- ustreza IEC 60669-1



- CM29PW
- CM29MW
- CM29SB
- CM29AT
- CM29ES
- CM29IW

SET ZA VTIČNICE IP44 2M

- za vgradnjo v vlažne prostore
- IP44 zaščito zagotavlja le v kombinaciji z vtičnico s pokrovom (VM11, VM41)
- vtičnice niso sestavni del seta
- okvir SOFT 2M brez napisne ploščice
- ustreza IEC 60884-1




NM41

NOSILEC KOPALNIŠKI SET 4M

- nosilec kopalniški set univerzalni z vijaki
- možnost pritrditve na že vgrajene pravokotne doze pritrditvenih mer od 108 do 135mm ali na doze velikosti 4M
- ustreza EN 60669-1

MOUNTING FRAME BATHROOM SET 4M

- universal mounting frame for bathroom set with screws
- universal solution for mounting on rectangular boxes with fixing dimensions 108-135mm or boxes 4M size
- in accordance with EN 60669-1




- | | |
|-------------------------------------|--------|
| <input type="checkbox"/> | OL41PW |
| <input type="checkbox"/> | OL41MW |
| <input checked="" type="checkbox"/> | OL41NB |
| <input type="checkbox"/> | OL41IW |
| <input type="checkbox"/> | OL41ES |
| <input type="checkbox"/> | OL41SG |
| <input type="checkbox"/> | OL41IB |
| <input type="checkbox"/> | OL41AT |
| <input type="checkbox"/> | OL41TI |
| <input type="checkbox"/> | OL41SB |

OKVIR LINE KOPALNIŠKI SET

- dekorativni okvir kopalniški set LINE
- višina 90mm
- ustreza EN 60669-1

COVER PLATE LINE BATHROOM SET

- decorative cover plate bathroom set LINE
- height 90mm
- in accordance with EN 60669-1




- | | |
|-------------------------------------|--------|
| <input type="checkbox"/> | OS41PW |
| <input type="checkbox"/> | OS41MW |
| <input checked="" type="checkbox"/> | OS41NB |
| <input type="checkbox"/> | OS41IW |
| <input type="checkbox"/> | OS41ES |
| <input type="checkbox"/> | OS41SG |
| <input type="checkbox"/> | OS41WE |
| <input type="checkbox"/> | OS41AT |
| <input type="checkbox"/> | OS41TI |
| <input type="checkbox"/> | OS41SB |


OKVIR SOFT KOPALNIŠKI SET

- dekorativni okvir kopalniški set SOFT
- višina 90mm
- ustreza EN 60669-1

COVER PLATE SOFT BATHROOM SET

- decorative cover plate bathroom set SOFT
- height 90mm
- in accordance with EN 60669-1



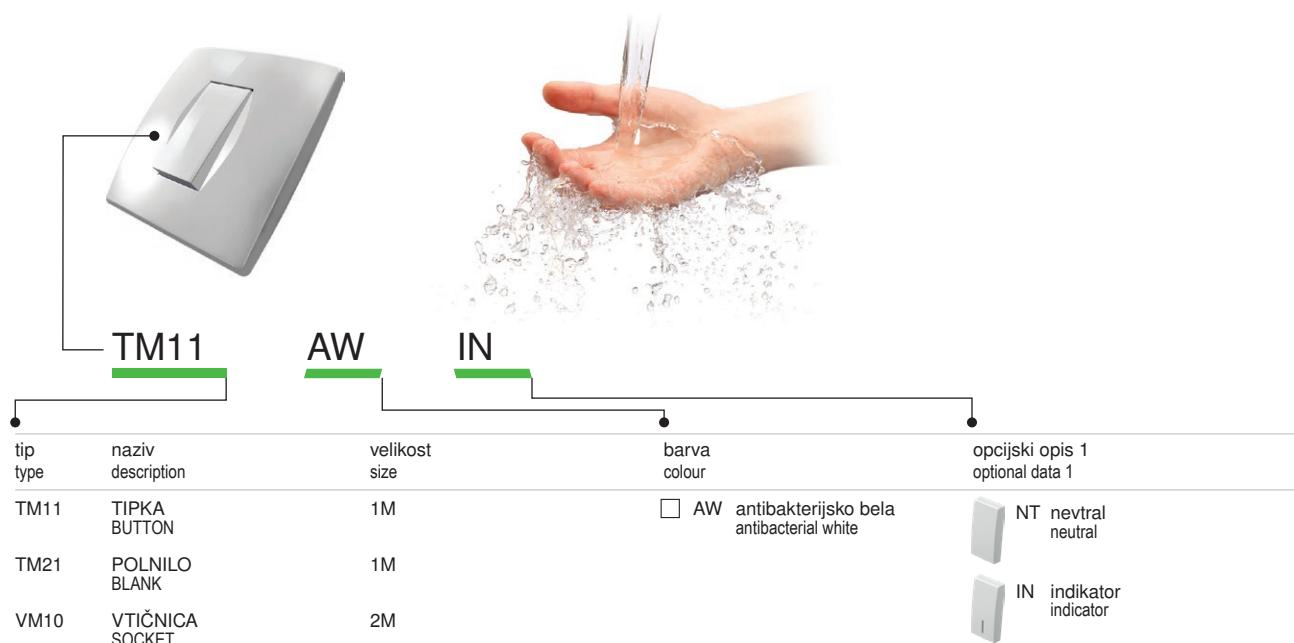**ANTIBAKTERIJSKI PROGRAM MODUL**

- stikala in vtičnice so vsakodnevno izpostavljene dotiku večjega števila ljudi, zato so to pogosta mesta za razvoj in širjenje bakterij
- zahvaljujoč svojim naravnim antibakterijskim lastnostim je srebro že 3 tisočletja v uporabi kot varno in učinkovito dezinfekcijsko sredstvo, saj je popolnoma naravno ter zdravju in okolju prijazno
- poseben antibakterijski dodatek srebrnih ionov zagotavlja dolgoročno, zanesljivo in učinkovito zaščito pred razvojem in širjenjem različnih bakterij, mikrobov in glivic
- antibakterijska zaščita pomeni večjo higieničnost, čistočo in zdravje ljudi
- antibakterijski program MODUL je primeren za uporabo povsod, kjer veljajo strogi higienski pogoji (bolnišnice, zdravstveni domovi, farmacevtski objekti, domovi za starejše, negovalni domovi, laboratoriji, restavracije, hoteli, letališča, avtobusne in železniške postaje, poslovni in trgovski prostori, javne institucije ...)
- laboratorijska testiranja so bila opravljena v neodvisni instituciji na podlagi najvišjih japonskih standardov JIS Z 2801
- nizki stroški za zagotavljanje zdravja ljudi
- oblika in funkcionalnost antibakterijskega programa MODUL omogočata enostavno čiščenje in vzdrževanje
- antibakterijski program MODUL kombiniramo z antibakterijskimi tipkami, okvirji in vtičnicami skupaj s klasičnimi nosilci in stikali
- vsak izdelek je zaradi lažje identifikacije na zadnji strani označen z AW (antibacterial white)

ANTIBACTERIAL PROGRAM MODUL

- switches and sockets are daily touched by many people, so this is a common place for development and spread of bacteria
- thanks to its natural antibacterial characteristics silver has been used for three millennia as a safe and effective disinfectant, since it is completely natural, healthy and environmentally friendly
- special antibacterial silver ions additive provides long-term, reliable and effective protection against the development and spread of bacteria, microbes and fungi
- antibacterial protection ensures hygiene, cleanliness and health for people
- perfectly suitable for use in environments with strict hygiene conditions (hospitals, health centers, pharmaceutical facilities, homes for elderly, nursing homes, laboratories, restaurants, hotels, airports, bus and railway stations, business and shopping areas, public institutions ...)
- independent laboratory testings have been carried out in accordance with highest Japanese standards JIS Z 2801
- low cost for providing human health
- design and functionality of antibacterial program MODUL allow easy cleaning and maintenance
- antibacterial buttons, cover plates and sockets are combined with classic mounting frames and switches
- products are labelled on the back with AW (antibacterial white)

TIPKA 1M TM11AW

- zamenljiva tipka velikosti 1M
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

BUTTON 1M

- replaceable button 1M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

**TIPKA 1M INDIKATOR** TM11AWIN

- zamenljiva tipka velikosti 1M
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

BUTTON 1M INDICATOR

- replaceable button 1M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

**TIPKA 2M** TM12AW

- zamenljiva tipka velikost 2M z nosilcem tipke
- uporablja se pri nadgradnji stikala ali tipkala velikosti 1M v velikost 2M
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

BUTTON 2M

- replaceable button 2M with button carrier
- to upgrade switch or push button from size 1M to size 2M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

**TIPKA 2M INDIKATOR** TM12AWIN

- zamenljiva tipka velikost 2M z nosilcem tipke
- uporablja se pri nadgradnji stikala ali tipkala velikosti 1M v velikost 2M
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

BUTTON 2M INDICATOR

- replaceable button 2M with button carrier
- to upgrade switch or push button from size 1M to size 2M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

**POLNILO 1M** TM21AW

- za zapolnjevanje praznih mest
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

BLANK 1M

- blank modul to fill up empty spaces
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

**POLNILO 2M** TM22AW

- za zapolnjevanje praznih mest
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

BLANK 2M

- blank modul to fill up empty spaces
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801





VM10AW

VTIČNICA SCHUKO+KS 2P+E 16A 250V~ 2M

- 2P+E schuko
- 16A 250V~, tip VM10
- ustreza IEC 60884-1, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov
- antibakterijska zaščita skladna z JIS Z 2801



SOCKET SCHUKO+KS 2P+E 16A 250V~ 2M

- 2P+E schuko
- 16A 250V~, type VM10
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm²
- built-in contact protection
- antibacterial protection in accordance with JIS Z 2801



VM11AW

VTIČNICA SCHUKO+KS+POKROV 2P+E 16A 250V~ 2M

- 2P+E schuko+pokrov
- 16A 250V~, tip VM11
- ustreza IEC 60884-1, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov
- antibakterijska zaščita skladna z JIS Z 2801



SOCKET SCHUKO+KS+COVER

- 2P+E 16A 250V~ 2M
- 2P+E schuko+cover
- 16A 250V~, type VM11
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm²
- built-in contact protection
- antibacterial protection in accordance with JIS Z 2801



VM20AW

VTIČNICA EURO+KS 2P 10A 250V~ 1M

- 2P euro
- 10A 250V~, tip VM20
- ustreza IEC 60884-1, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov
- antibakterijska zaščita skladna z JIS Z 2801



SOCKET EURO+KS 2P 10A 250V~ 1M

- 2P Euro
- 10A 250V~, type VM20
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm²
- built-in contact protection
- antibacterial protection in accordance with JIS Z 2801



KM11AW

VTIČNICA TV KONČNA 1dB 1M

- TV končna
- frekvenčni pas 5÷2400 MHz
- dušenje < 1 dB
- ustreza EN 50083-1
- vijačna priključitev
- antibakterijska zaščita skladna z JIS Z 2801



SOCKET TV END-LINE 1dB 1M

- TV end-line
- frequency range 5÷2400 MHz
- reduction < 1 dB
- in accordance with EN 50083-1
- screw contacts
- antibacterial protection in accordance with JIS Z 2801



KM35AW

ADAPTER KS 1M

- KS keystone pritrditveni standard
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- komunikacijski modul ni vgrajen
- antibakterijska zaščita skladna z JIS Z 2801



ADAPTER KS 1M

- KS keystone fixing standard
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- communication module not included
- antibacterial protection in accordance with JIS Z 2801



OS20AW

OKVIR SOFT 2M

- dekorativni okvir SOFT 2M
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

COVER PLATE SOFT 2M

- decorative cover plate SOFT 2M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801



OS24AW

OKVIR SOFT 2x2M

- dekorativni okvir SOFT 2x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

COVER PLATE SOFT 2x2M

- decorative cover plate SOFT 2x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801



OS26AW

OKVIR SOFT 3x2M

- dekorativni okvir SOFT 3x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

COVER PLATE SOFT 3x2M

- decorative cover plate SOFT 3x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801



OS30AW

OKVIR SOFT 3M

- dekorativni okvir SOFT 3M
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

COVER PLATE SOFT 3M

- decorative cover plate SOFT 3M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801




OS40AW

OKVIR SOFT 4M

- dekorativni okvir SOFT 4M
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

COVER PLATE SOFT 4M

- decorative cover plate SOFT 4M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

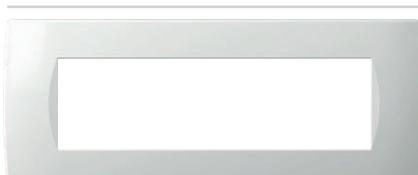

OS70AW

OKVIR SOFT 7M


- dekorativni okvir SOFT 7M
- ustreza EN 60669-1
- antibakterijska zaščita skladna z JIS Z 2801

COVER PLATE SOFT 7M


- decorative cover plate SOFT 7M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

osnovni
basic


PW bela-sijaj
polar white

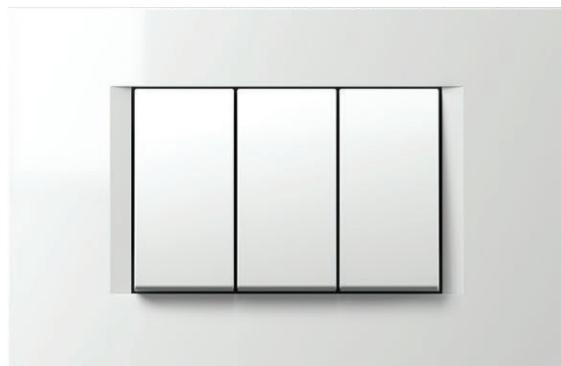


IW bež-sijaj
ivory white

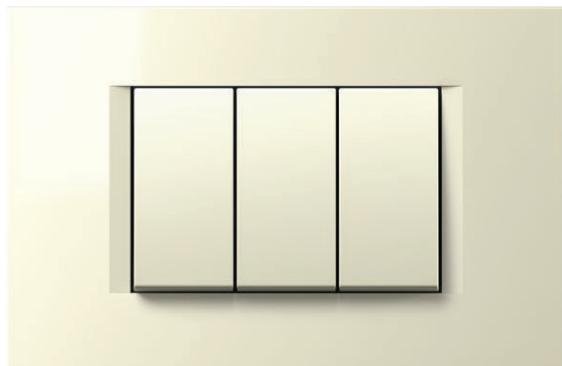


ES srebrna
elox silver

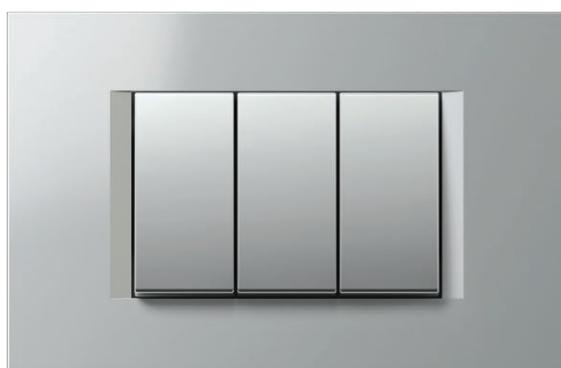


SB črna-mat
soft touch black

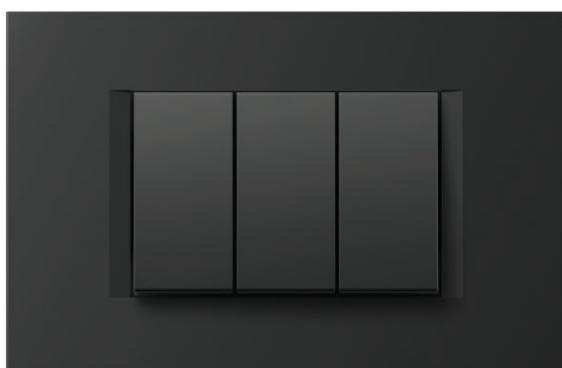

AT antracit
anthracite

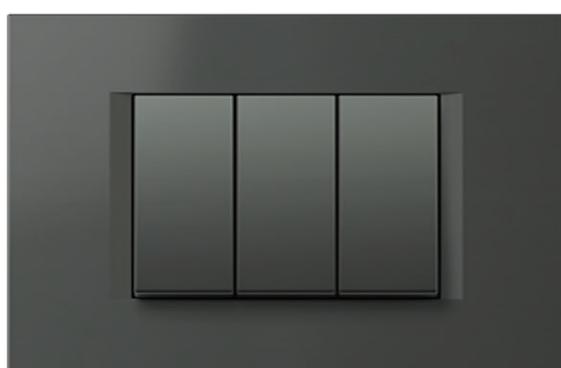

MW bela-mat
matte white

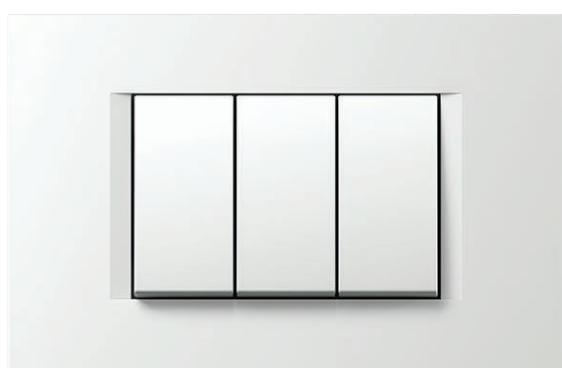


MODUL

LINE


C O V E R P L A T E S L I N E O L

dekor
decor


SG zlata
sand gold

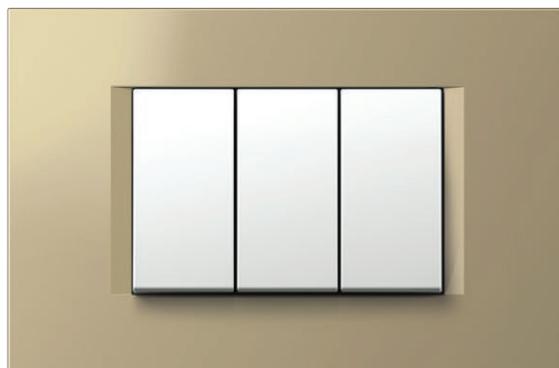

NB črna-sijaj
night black

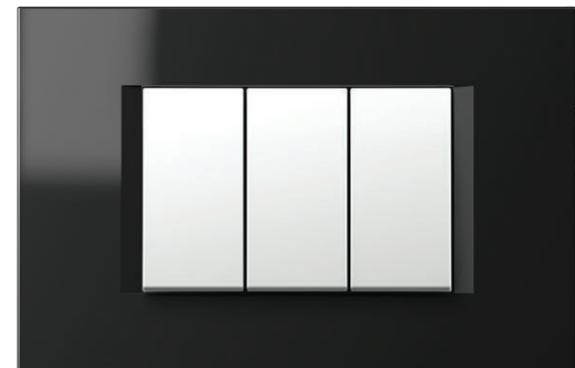

IB modra
impulse blue

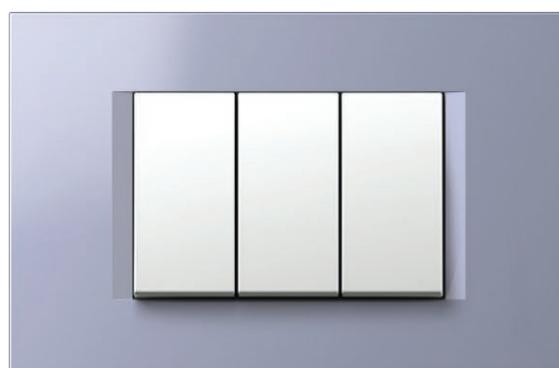

TI titan
titanium



SW kamen beli
stone white





OL30



PW

tip type	naziv description	velikost size	barva colour			
OL10	OKVIR LINE COVER PLATE LINE	1/2M	PW bela-sijaj polar white	SG zlata sand gold	AT antracit anthracite	
OL13	OKVIR LINE COVER PLATE LINE	1/3M	MW bela-mat matte white	NB črna-sijaj night black	TI titan titanium	
OL20	OKVIR LINE COVER PLATE LINE	2M	IW bež-sijaj ivory white	IB modra impulse blue	SW kamen beli stone white	
.	.	.	ES srebrna elox silver			
.	.	.	SB črna-mat soft touch black			



OKVIR LINE 1/2M



OL10PW	OL10SG
OL10MW	OL10NB
OL10IW	OL10IB
OL10ES	OL10AT
OL10SB	OL10TI
	OL10SW

- dekorativni okvir LINE 1/2M
- ustreza EN 60669-1

COVER PLATE LINE 1/2M

- decorative cover plate LINE 1/2M
- in accordance with EN 60669-1



OL20PW	OL20SG
OL20MW	OL20NB
OL20IW	OL20IB
OL20ES	OL20AT
OL20SB	OL20TI
	OL20SW

- dekorativni okvir LINE 2M
- ustreza EN 60669-1

COVER PLATE LINE 2M

- decorative cover plate LINE 2M
- in accordance with EN 60669-1



OL24PW	OL24SG
OL24MW	OL24NB
OL24IW	OL24IB
OL24ES	OL24AT
OL24SB	OL24TI
	OL24SW

- dekorativni okvir LINE 2x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1

COVER PLATE LINE 2x2M

- decorative cover plate LINE 2x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1



OL26PW	OL26SG
OL26MW	OL26NB
OL26IW	OL26IB
OL26ES	OL26AT
OL26SB	OL26TI
	OL26SW

- dekorativni okvir LINE 3x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1

COVER PLATE LINE 3x2M

- decorative cover plate LINE 3x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1



OL28PW	OL28SG
OL28MW	OL28NB
OL28IW	OL28IB
OL28ES	OL28AT
OL28SB	OL28TI
	OL28SW

- dekorativni okvir LINE 4x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1

COVER PLATE LINE 4x2M

- decorative cover plate LINE 4x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1



OL29PW	OL29SG
OL29MW	OL29NB
OL29IW	OL29IB
OL29ES	OL29AT
OL29SB	OL29TI
	OL29SW

- dekorativni okvir LINE 5x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1

COVER PLATE LINE 5x2M

- decorative cover plate LINE 5x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1

C O V E R P L A T E S L I N E O L



OL13PW	OL13SG
OL13MW	OL13NB
OL13IW	OL13IB
OL13ES	OL13AT
OL13SB	OL13TI

OKVIR LINE 1/3M

- dekorativni okvir LINE 1/3M
- ustreza EN 60669-1

COVER PLATE LINE 1/3M

- decorative cover plate LINE 1/3M
- in accordance with EN 60669-1



OL30PW	OL30SG
OL30MW	OL30NB
OL30IW	OL30IB
OL30ES	OL30AT
OL30SB	OL30TI

OKVIR LINE 3M

- dekorativni okvir LINE 3M
- ustreza EN 60669-1

COVER PLATE LINE 3M

- decorative cover plate LINE 3M
- in accordance with EN 60669-1




OL40PW	OL40SG
OL40MW	OL40NB
OL40IW	OL40IB
OL40ES	OL40AT
OL40SB	OL40TI

OKVIR LINE 4M

- dekorativni okvir LINE 4M
- ustreza EN 60669-1

COVER PLATE LINE 4M

- decorative cover plate LINE 4M
- in accordance with EN 60669-1

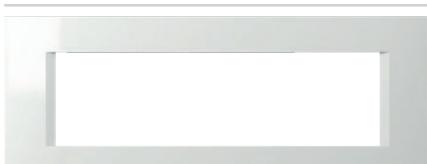

OL70PW	OL70SG
OL70MW	OL70NB
OL70IW	OL70IB
OL70ES	OL70AT
OL70SB	OL70TI

OKVIR LINE 7M

- dekorativni okvir LINE 7M
- ustreza EN 60669-1

COVER PLATE LINE 7M

- decorative cover plate LINE 7M
- in accordance with EN 60669-1



OL71PW	OL71AT
OL71MW	OL71TI
OL71IW	
OL71ES	
OL71SB	

OKVIR LINE 2x7M

- dekorativni okvir LINE 2x7M
- ustreza EN 60669-1

COVER PLATE LINE 2x7M

- decorative cover plate LINE 2x7M
- in accordance with EN 60669-1



OL23PW	OL23SG
OL23MW	OL23NB
OL23IW	OL23IB
OL23ES	OL23AT
OL23SB	OL23TI

OKVIR LINE 2/3M

- dekorativni okvir LINE 2/3M
- ustreza EN 60669-1


COVER PLATE LINE 2/3M

- decorative cover plate LINE 2/3M
- in accordance with EN 60669-1




osnovni
basic

PW bela-sijaj
polar white

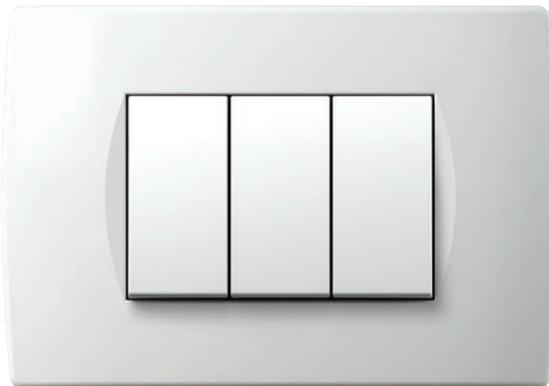


ES srebrna-mat
elox silver

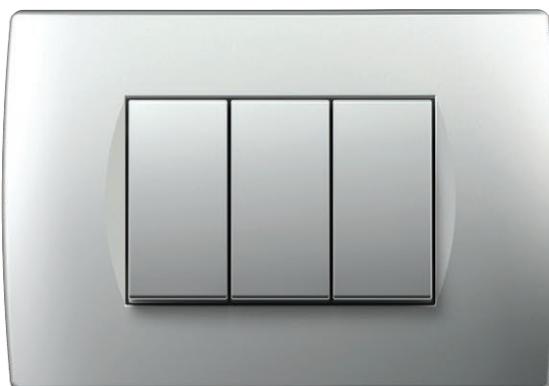


AT antracit
anthracite




IW bež-sijaj
ivory white

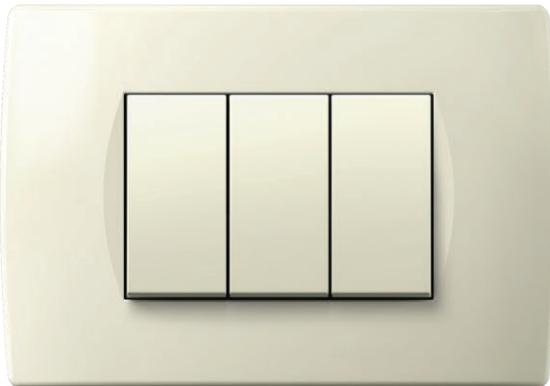

SB črna-mat
soft touch black

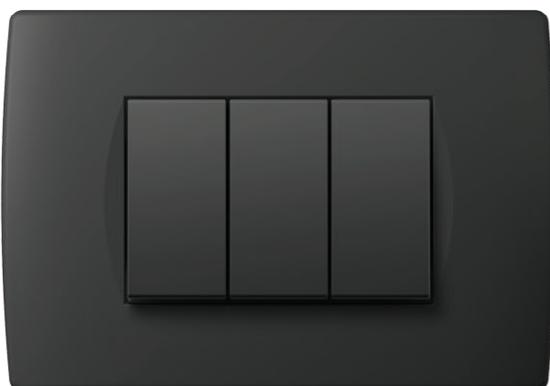

MW bela-mat
matte white

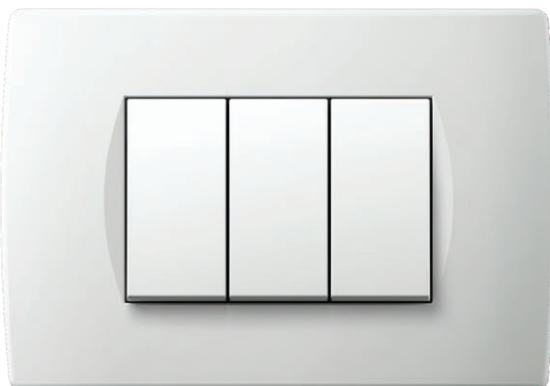


MODUL

SOFT


C O V E R P L A T E S S O F T O S

dekor
decor

SG zlata-mat
sand gold

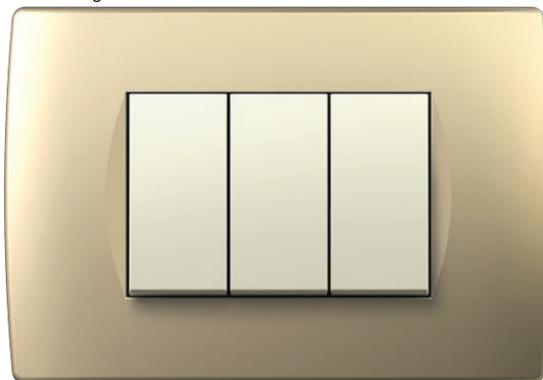


TI titan
titanium

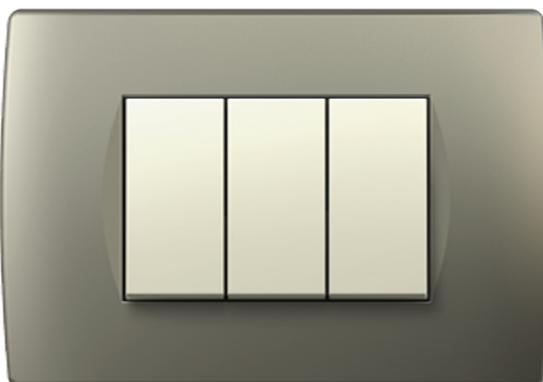

WW oreh
walnut




NB črna-sijaj
night black

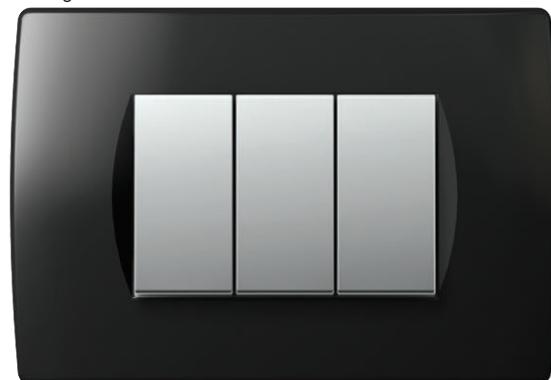

WE wenge
wenge



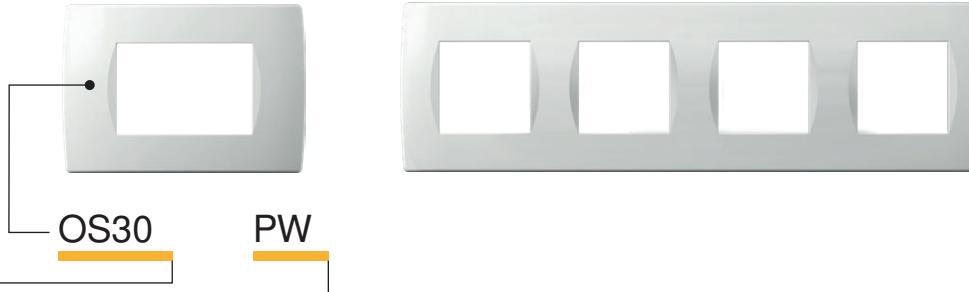

tip type	naziv description	velikost size	barva colour
OS10	OKVIR SOFT COVER PLATE SOFT	1/2M	PW bela-sijaj polar white
OS13	OKVIR SOFT COVER PLATE SOFT	1/3M	MW bela-mat matte white
OS20	OKVIR SOFT COVER PLATE SOFT	2M	IW bež-sijaj ivory white
.	.	.	ES srebrna-mat elox silver
.	.	.	SB črna-mat soft touch black
			SG zlata-mat sand gold
			NB črna-sijaj night black
			AT antracit anthracite
			TI titan titanium
			WW oreh walnut
			WE wenge



OS10PW	OS10SG
OS10MW	OS10NB
OS10IW	OS10AT
OS10ES	OS10TI
OS10SB	OS10WW

OKVIR SOFT 1/2M

- dekorativni okvir SOFT 1/2M
 - ustreza EN 60669-1
- COVER PLATE SOFT 1/2M**
- decorative cover plate SOFT 1/2M
 - in accordance with EN 60669-1



OS20PW	OS20SG
OS20MW	OS20NB
OS20IW	OS20AT
OS20ES	OS20TI
OS20SB	OS20WW

OKVIR SOFT 2M

- dekorativni okvir SOFT 2M
 - ustreza EN 60669-1
- COVER PLATE SOFT 2M**
- decorative cover plate SOFT 2M
 - in accordance with EN 60669-1



OS24PW	OS24SG
OS24MW	OS24NB
OS24IW	OS24AT
OS24ES	OS24TI
OS24SB	OS24WW

OKVIR SOFT 2x2M

- dekorativni okvir SOFT 2x2M
 - horizontalna ali vertikalna vgradnja
 - ustreza EN 60669-1
- COVER PLATE SOFT 2x2M**
- decorative cover plate SOFT 2x2M
 - horizontal or vertical mounting
 - in accordance with EN 60669-1



OS26PW	OS26SG
OS26MW	OS26NB
OS26IW	OS26AT
OS26ES	OS26TI
OS26SB	OS26WW

OKVIR SOFT 3x2M

- dekorativni okvir SOFT 3x2M
 - horizontalna ali vertikalna vgradnja
 - ustreza EN 60669-1
- COVER PLATE SOFT 3x2M**
- decorative cover plate SOFT 3x2M
 - horizontal or vertical mounting
 - in accordance with EN 60669-1



OS28PW	OS28SG
OS28MW	OS28NB
OS28IW	OS28AT
OS28ES	OS28TI
OS28SB	OS28WW

OKVIR SOFT 4x2M

- dekorativni okvir SOFT 4x2M
 - horizontalna ali vertikalna vgradnja
 - ustreza EN 60669-1
- COVER PLATE SOFT 4x2M**
- decorative cover plate SOFT 4x2M
 - horizontal or vertical mounting
 - in accordance with EN 60669-1

COVER PLATES SOFT OS



	OS13PW		OS13SG
	OS13MW		OS13NB
	OS13IW		OS13AT
	OS13ES		OS13TI
	OS13SB		OS13WW
			OS13WE

OKVIR SOFT 1/3M


- dekorativni okvir SOFT 1/3M
 - ustreza EN 60669-1
- COVER PLATE SOFT 1/3M**
- decorative cover plate SOFT 1/3M
 - in accordance with EN 60669-1



	OS30PW		OS30SG
	OS30MW		OS30NB
	OS30IW		OS30AT
	OS30ES		OS30TI
	OS30SB		OS30WW
			OS30WE

OKVIR SOFT 3M

- dekorativni okvir SOFT 3M
 - ustreza EN 60669-1
- COVER PLATE SOFT 3M**
- decorative cover plate SOFT 3M
 - in accordance with EN 60669-1



	OS40PW		OS40SG
	OS40MW		OS40NB
	OS40IW		OS40AT
	OS40ES		OS40TI
	OS40SB		OS40WW
			OS40WE

OKVIR SOFT 4M

- dekorativni okvir SOFT 4M
 - ustreza EN 60669-1
- COVER PLATE SOFT 4M**
- decorative cover plate SOFT 4M
 - in accordance with EN 60669-1



	OS70PW		OS70SG
	OS70MW		OS70NB
	OS70IW		OS70AT
	OS70ES		OS70TI
	OS70SB		OS70WW
			OS70WE

OKVIR SOFT 7M

- dekorativni okvir SOFT 7M
 - ustreza EN 60669-1
- COVER PLATE SOFT 7M**
- decorative cover plate SOFT 7M
 - in accordance with EN 60669-1



	OS71PW		OS71AT
	OS71MW		OS71TI
	OS71IW		
	OS71ES		
	OS71SB		

OKVIR SOFT 2x7M



- dekorativni okvir SOFT 2x7M
 - ustreza EN 60669-1
- COVER PLATE SOFT 2x7M**
- decorative cover plate SOFT 2x7M
 - in accordance with EN 60669-1



	OS72PW		OS72SG
	OS72IW		OS72AT
	OS72ES		OS72TI
	OS72SB		

OKVIR SOFT 2x7M Z NAPISNO PLOŠČICO

- dekorativni okvir SOFT 2x7M z napisno ploščico
 - ustreza EN 60669-1
- COVER PLATE SOFT 2x7M**
- decorative cover plate SOFT 2x7M with inscription plate
 - in accordance with EN 60669-1



	OS23PW		OS23SG
	OS23MW		OS23NB
	OS23IW		OS23AT
	OS23ES		OS23TI
	OS23SB		OS23WW
			OS23WE

OKVIR SOFT 2/3M


- dekorativni okvir SOFT 2/3M
 - ustreza EN 60669-1
- COVER PLATE SOFT 2/3M**
- decorative cover plate SOFT 2/3M
 - in accordance with EN 60669-1

DEKORACIJE OKVIRJEV

- pri večjem naročilu naredimo dekorativne okvirje v barvi po vaših željah
- primerno za okvirje OL, OS

COVER PLATES DECORATIONS

- when ordering large quantities, cover plates can be made in the colour of your choice
- suitable for cover plates OL, OS

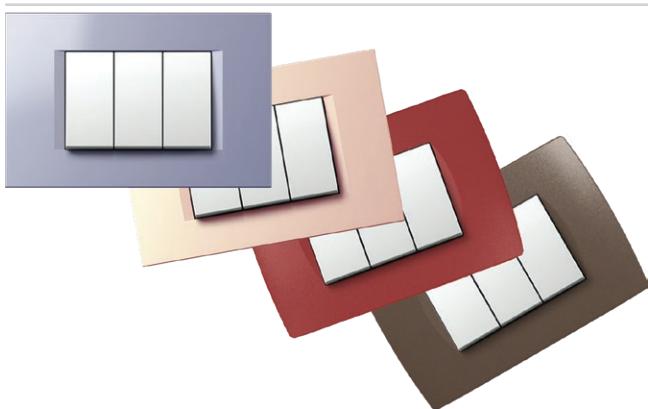

les
wood

WB bambus
bamboo



WM javor
maple



WW oreh
walnut



WE wenge
wenge



Narava je edinstvena in dragocena, kot naši okvirji, med katerimi ni enakega.

*Reklamacij glede različnosti izgleda in medsebojnega razlikovanja pri leseni
okvirjih ne moremo upoštevati.*





Nature is unique and precious, as our decorative cover plates where no two are the same.

*Complaints about wooden decorative cover plate's diverse appearance and differentiation
cannot be considered.*

M O D U L

P U R E

C O V E R P L A T E S P U R E O P

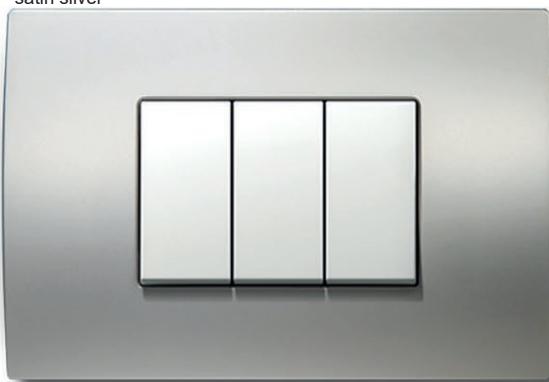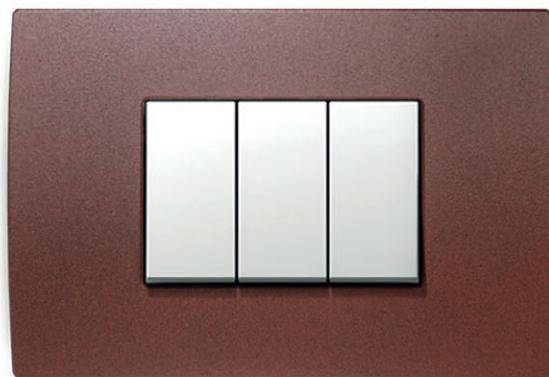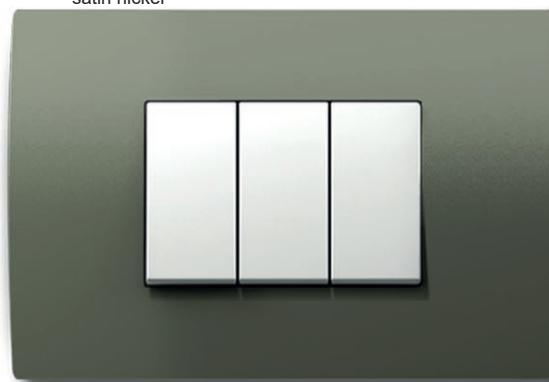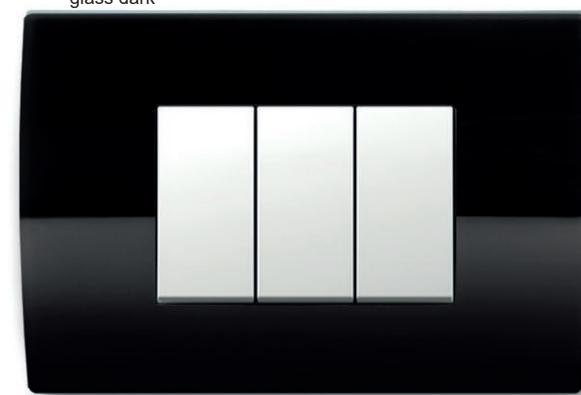kovina
metalMH kovano jeklo
hammered steelMS satinirano srebro
satin silverME zarjavelo železo
etched ironMN satiniran nikelj
satin nickelsteklo
glassGL bela
glass lightGD črna
glass dark

tip type	naziv description	velikost size	barva colour
OP13	OKVIR PURÉ COVER PLATE PURÉ	1/3M	MH kovano jeklo hammered steel
OP20	OKVIR PURÉ COVER PLATE PURÉ	2M	ME zarjavelo železo etched iron
OP23	OKVIR PURÉ COVER PLATE PURÉ	2/3M	MS satinirano srebro satin silver
.	.	.	MN satiniran nikelj satin nickel
.	.	.	WB bambus bamboo
.	.	.	WW oreh walnut
.	.	.	WM javor maple
.	.	.	WE wenge wenge
.	.	.	GL bela glass light
.	.	.	GD črna glass dark




OP20MH	OP20WB
OP20ME	OP20WW
OP20MS	OP20WM
OP20MN	OP20WE
	OP20GL
	OP20GD

OKVIR PURÉ 2M

- dekorativni okvir PURÉ 2M
- ustreza EN 60669-1

COVER PLATE PURÉ 2M

- decorative cover plate PURÉ 2M
- in accordance with EN 60669-1



OP24MH	OP24WB
OP24ME	OP24WW
OP24MS	OP24WM
OP24MN	OP24WE
	OP24GL
	OP24GD

OKVIR PURÉ 2x2M

- dekorativni okvir PURÉ 2x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1

COVER PLATE PURÉ 2x2M

- decorative cover plate PURÉ 2x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1




OP26MH	OP26WB
OP26ME	OP26WW
OP26MS	OP26WM
OP26MN	OP26WE
	OP26GL
	OP26GD

OKVIR PURÉ 3x2M

- dekorativni okvir PURÉ 3x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1

COVER PLATE PURÉ 3x2M

- decorative cover plate PURÉ 3x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1

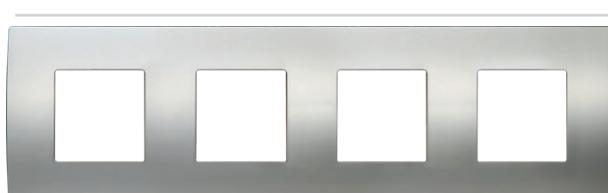

OP28MH	OP28WB
OP28ME	OP28WW
OP28MS	OP28WM
OP28MN	OP28WE
	OP28GL
	OP28GD

OKVIR PURÉ 4x2M

- dekorativni okvir PURÉ 4x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1

COVER PLATE PURÉ 4x2M

- decorative cover plate PURÉ 4x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1

C O V E R P L A T E S P U R E O P



OP13MH
OP13ME
OP13MS
OP13MN

OP13WB
OP13WW
OP13WM
OP13WE
OP13GL
OP13GD

OKVIR PURE 1/3M

- dekorativni okvir PURE 1/3M
- ustreza EN 60669-1

COVER PLATE PURE 1/3M

- decorative cover plate PURE 1/3M
- in accordance with EN 60669-1



OP30MH
OP30ME
OP30MS
OP30MN


OP30WB
OP30WW
OP30WM
OP30WE
OP30GL
OP30GD

OKVIR PURE 3M

- dekorativni okvir PURE 3M
- ustreza EN 60669-1

COVER PLATE PURE 3M

- decorative cover plate PURE 3M
- in accordance with EN 60669-1



OP40MH
OP40ME
OP40MS
OP40MN

OP40WB
OP40WW
OP40WM
OP40WE
OP40GL
OP40GD

OKVIR PURE 4M

- dekorativni okvir PURE 4M
- ustreza EN 60669-1

COVER PLATE PURE 4M

- decorative cover plate PURE 4M
- in accordance with EN 60669-1



OP70MH
OP70ME
OP70MS
OP70MN

OP70WB
OP70WW
OP70WM
OP70WE
OP70GL
OP70GD

OKVIR PURE 7M

- dekorativni okvir PURE 7M
- ustreza EN 60669-1

COVER PLATE PURE 7M

- decorative cover plate PURE 7M
- in accordance with EN 60669-1



OP23MH
OP23ME
OP23MS
OP23MN

OP23WB
OP23WW
OP23WM
OP23WE
OP23GL
OP23GD

OKVIR PURE 2/3M

- dekorativni okvir PURE 2/3M
- ustreza EN 60669-1

COVER PLATE PURE 2/3M




- decorative cover plate PURE 2/3M
- in accordance with EN 60669-1



Be bold, be EDGE

MODUL
EDGE

C O V E R P L A T E S E D G E O G

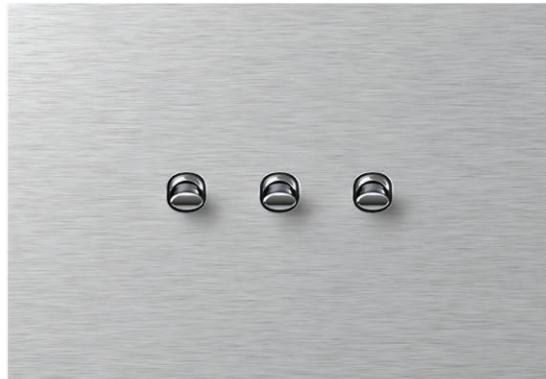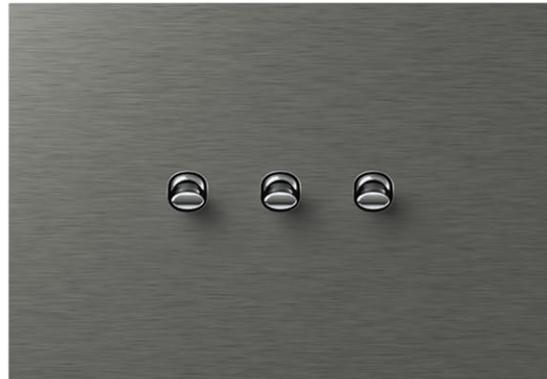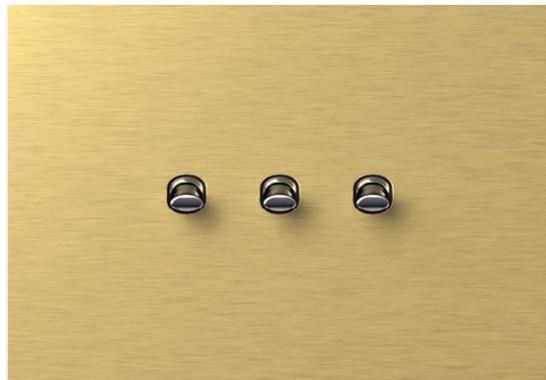kovina
metalMA srebrna
silverMT antracit
anthraciteMZ zlata
goldsteklo
glassGD črna
glass darkGL bela
glass light




O K V I R J I E D G E O G



P

tip type	naziv description	velikost size	barva colour			
OG10	OKVIR EDGE COVER PLATE EDGE	1/2M	MA srebrna silver	GD črna glass dark		
OG13	OKVIR EDGE COVER PLATE EDGE	1/3M	MT antracit anthracite	GL bela glass light		
OG20	OKVIR EDGE COVER PLATE EDGE	2M	MZ zlata gold			
.	.	.				
.	.	.				
.	.	.				



OKVIR EDGE 1/2M

- dekorativni okvir EDGE 1/2M
- ustreza EN 60669-1

COVER PLATE EDGE 1/2M

- decorative cover plate EDGE 1/2M
- in accordance with EN 60669-1




OKVIR EDGE 2M

- dekorativni okvir EDGE 2M
- ustreza EN 60669-1

COVER PLATE EDGE 2M

- decorative cover plate EDGE 2M
- in accordance with EN 60669-1

C O V E R P L A T E S E D G E O G



	OG13MAP		OG13GDP
	OG13MTP		OG13GLP
	OG13MZP		

OKVIR EDGE 1/3M

- dekorativni okvir EDGE 1/3M
- ustreza EN 60669-1

COVER PLATE EDGE 1/3M

- decorative cover plate EDGE 1/3M
- in accordance with EN 60669-1



	OG30MAP		OG30GDP
	OG30MTP		OG30GLP
	OG30MZP		

OKVIR EDGE 3M

- dekorativni okvir EDGE 3M
- ustreza EN 60669-1

COVER PLATE EDGE 3M

- decorative cover plate EDGE 3M
- in accordance with EN 60669-1



	OG40MAP		OG40GDP
	OG40MTP		OG40GLP
	OG40MZP		

OKVIR EDGE 4M

- dekorativni okvir EDGE 4M
- ustreza EN 60669-1

COVER PLATE EDGE 4M

- decorative cover plate EDGE 4M
- in accordance with EN 60669-1



	OG70MAP		OG70GDP
	OG70MTP		OG70GLP
	OG70MZP		

OKVIR EDGE 7M

- dekorativni okvir EDGE 7M
- ustreza EN 60669-1

COVER PLATE EDGE 7M

- decorative cover plate EDGE 7M
- in accordance with EN 60669-1



	OG23MAP		OG23GDP
	OG23MTP		OG23GLP
	OG23MZP		

OKVIR EDGE 2/3M

- dekorativni okvir EDGE 2/3M
- ustreza EN 60669-1


OKVIR EDGE 2/3M

- dekorativni okvir EDGE 2/3M
- uskladeno s normom EN 60669-1

O K V I R J I E D G E O G

kovina
metal

MA srebrna
silver

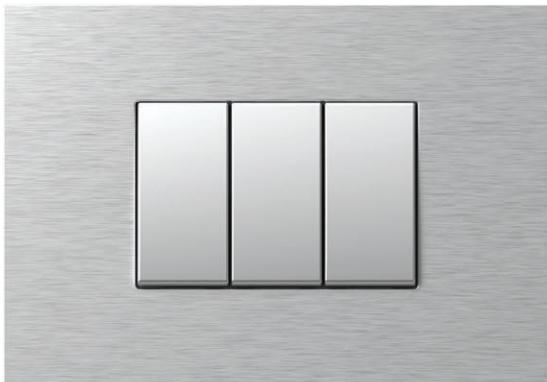

MT antracit
anthracite




MZ zlata
gold




steklo
glass

GD črna
glass dark

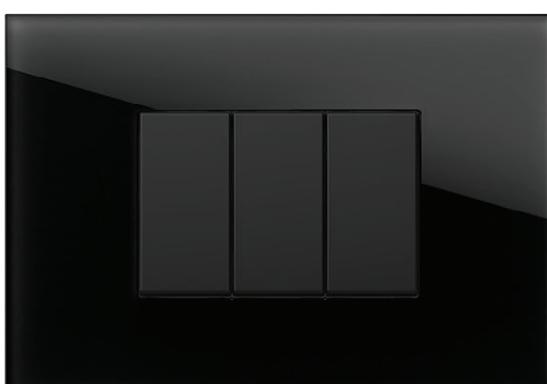

GL bela
glas light

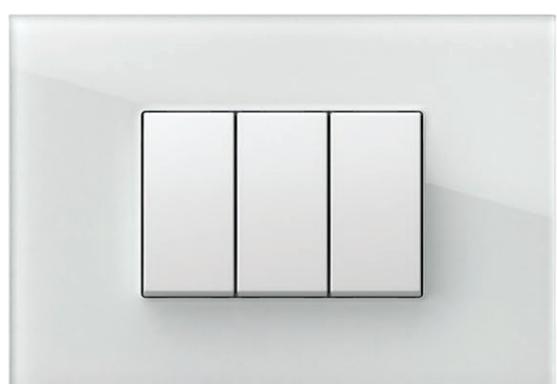

COVER PLATES EDGE OG



OG30



MA

M

tip type	naziv description	velikost size	barva colour	GD	črna glass dark
OG10	OKVIR EDGE COVER PLATE EDGE	1/2M	MA srebrna silver	GD	črna glass dark
OG13	OKVIR EDGE COVER PLATE EDGE	1/3M	MT antracit anthracite	GL	bela glass light
OG20	OKVIR EDGE COVER PLATE EDGE	2M	MZ zlata gold		
.	.	.			
.	.	.			



M



P




OG10MAM
OG10MTM
OG10MZM

OKVIR EDGE 1/2M

- dekorativni okvir EDGE 1/2M
- ustreza EN 60669-1

COVER PLATE EDGE 1/2M

- decorative cover plate EDGE 1/2M
- in accordance with EN 60669-1




OG20MAM
OG20MTM
OG20MZM

OKVIR EDGE 2M

- dekorativni okvir EDGE 2M
- ustreza EN 60669-1

COVER PLATE EDGE 2M

- decorative cover plate EDGE 2M
- in accordance with EN 60669-1




OG24MAM
OG24MTM
OG24MZM

OKVIR EDGE 2x2M

- dekorativni okvir EDGE 2x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1

COVER PLATE EDGE 2x2M

- decorative cover plate EDGE 2x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1

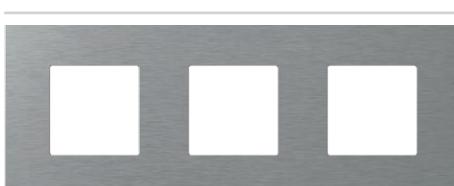


OG26MAM
OG26MTM
OG26MZM

OKVIR EDGE 3x2M

- dekorativni okvir EDGE 3x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1

COVER PLATE EDGE 3x2M

- decorative cover plate EDGE 3x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1

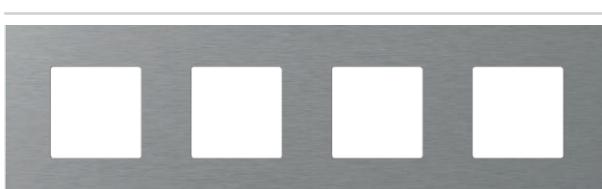

OG28MAM
OG28MTM
OG28MZM

OKVIR EDGE 4x2M

- dekorativni okvir EDGE 4x2M
- horizontalna ali vertikalna vgradnja
- ustreza EN 60669-1

COVER PLATE EDGE 4x2M

- decorative cover plate EDGE 4x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1



	OG13MAM		OG13GDM
	OG13MTM		OG13GLM
	OG13MZM		

OKVIR EDGE 1/3M

- dekorativni okvir EDGE 1/3M
- ustreza EN 60669-1

COVER PLATE EDGE 1/3M

- decorative cover plate EDGE 1/3M
- in accordance with EN 60669-1



	OG30MAM		OG30GDM
	OG30MTM		OG30GLM
	OG30MZM		

OKVIR EDGE 3M

- dekorativni okvir EDGE 3M
- ustreza EN 60669-1

COVER PLATE EDGE 3M

- decorative cover plate EDGE 3M
- in accordance with EN 60669-1



	OG40MAM		OG40GDM
	OG40MTM		OG40GLM
	OG40MZM		

OKVIR EDGE 4M

- dekorativni okvir EDGE 4M
- ustreza EN 60669-1

COVER PLATE EDGE 4M

- decorative cover plate EDGE 4M
- in accordance with EN 60669-1



	OG70MAM		OG70GDM
	OG70MTM		OG70GLM
	OG70MZM		

OKVIR EDGE 7M

- dekorativni okvir EDGE 7M
- ustreza EN 60669-1

COVER PLATE EDGE 7M

- decorative cover plate EDGE 7M
- in accordance with EN 60669-1



	OG23MAM		OG23GDM
	OG23MTM		OG23GLM
	OG23MZM		

OKVIR EDGE 2/3M

- dekorativni okvir EDGE 2/3M
- ustreza EN 60669-1

COVER PLATE EDGE 2/3M

- decorative cover plate EDGE 2/3M
- in accordance with EN 60669-1

MODUL
LINE


A x B

MODUL
SOFT

A x B

MODUL
PURE

1/2M




80 x 80 mm

84 x 84 mm

A x B

2M




80 x 80 mm

84 x 84 mm

93 x 90 mm

2x2M




151 x 80 mm

155 x 84 mm

164 x 90 mm

3x2M




222 x 80 mm

226 x 84 mm

235 x 90 mm

4x2M




293 x 80 mm

297 x 84 mm

304 x 90 mm


5x2M



364,1 x 80 mm



1/3M




122 x 80 mm

122 x 84 mm

134 x 90 mm

3M




122 x 80 mm

122 x 84 mm

134 x 90 mm

4M




149 x 80 mm

144 x 84 mm

157 x 90 mm

7M




207 x 80 mm

212 x 84 mm

224 x 90 mm

2x7M




215 x 159 mm

212 x 158 mm

A x B





2/3M




122 x 80 mm

122 x 84 mm


134 x 90 mm

 $A \times B$ **1/2M**


92 x 92 mm

2M


92 x 92 mm

2x2M


163 x 92 mm

3x2M


234 x 92 mm

4x2M


305 x 92 mm

**1/3M**


132 x 92 mm

3M


132 x 92 mm

4M

154 x 92 mm


7M

222 x 92 mm


**2/3M**

132 x 92 mm

K O M B I N A T O R I K A

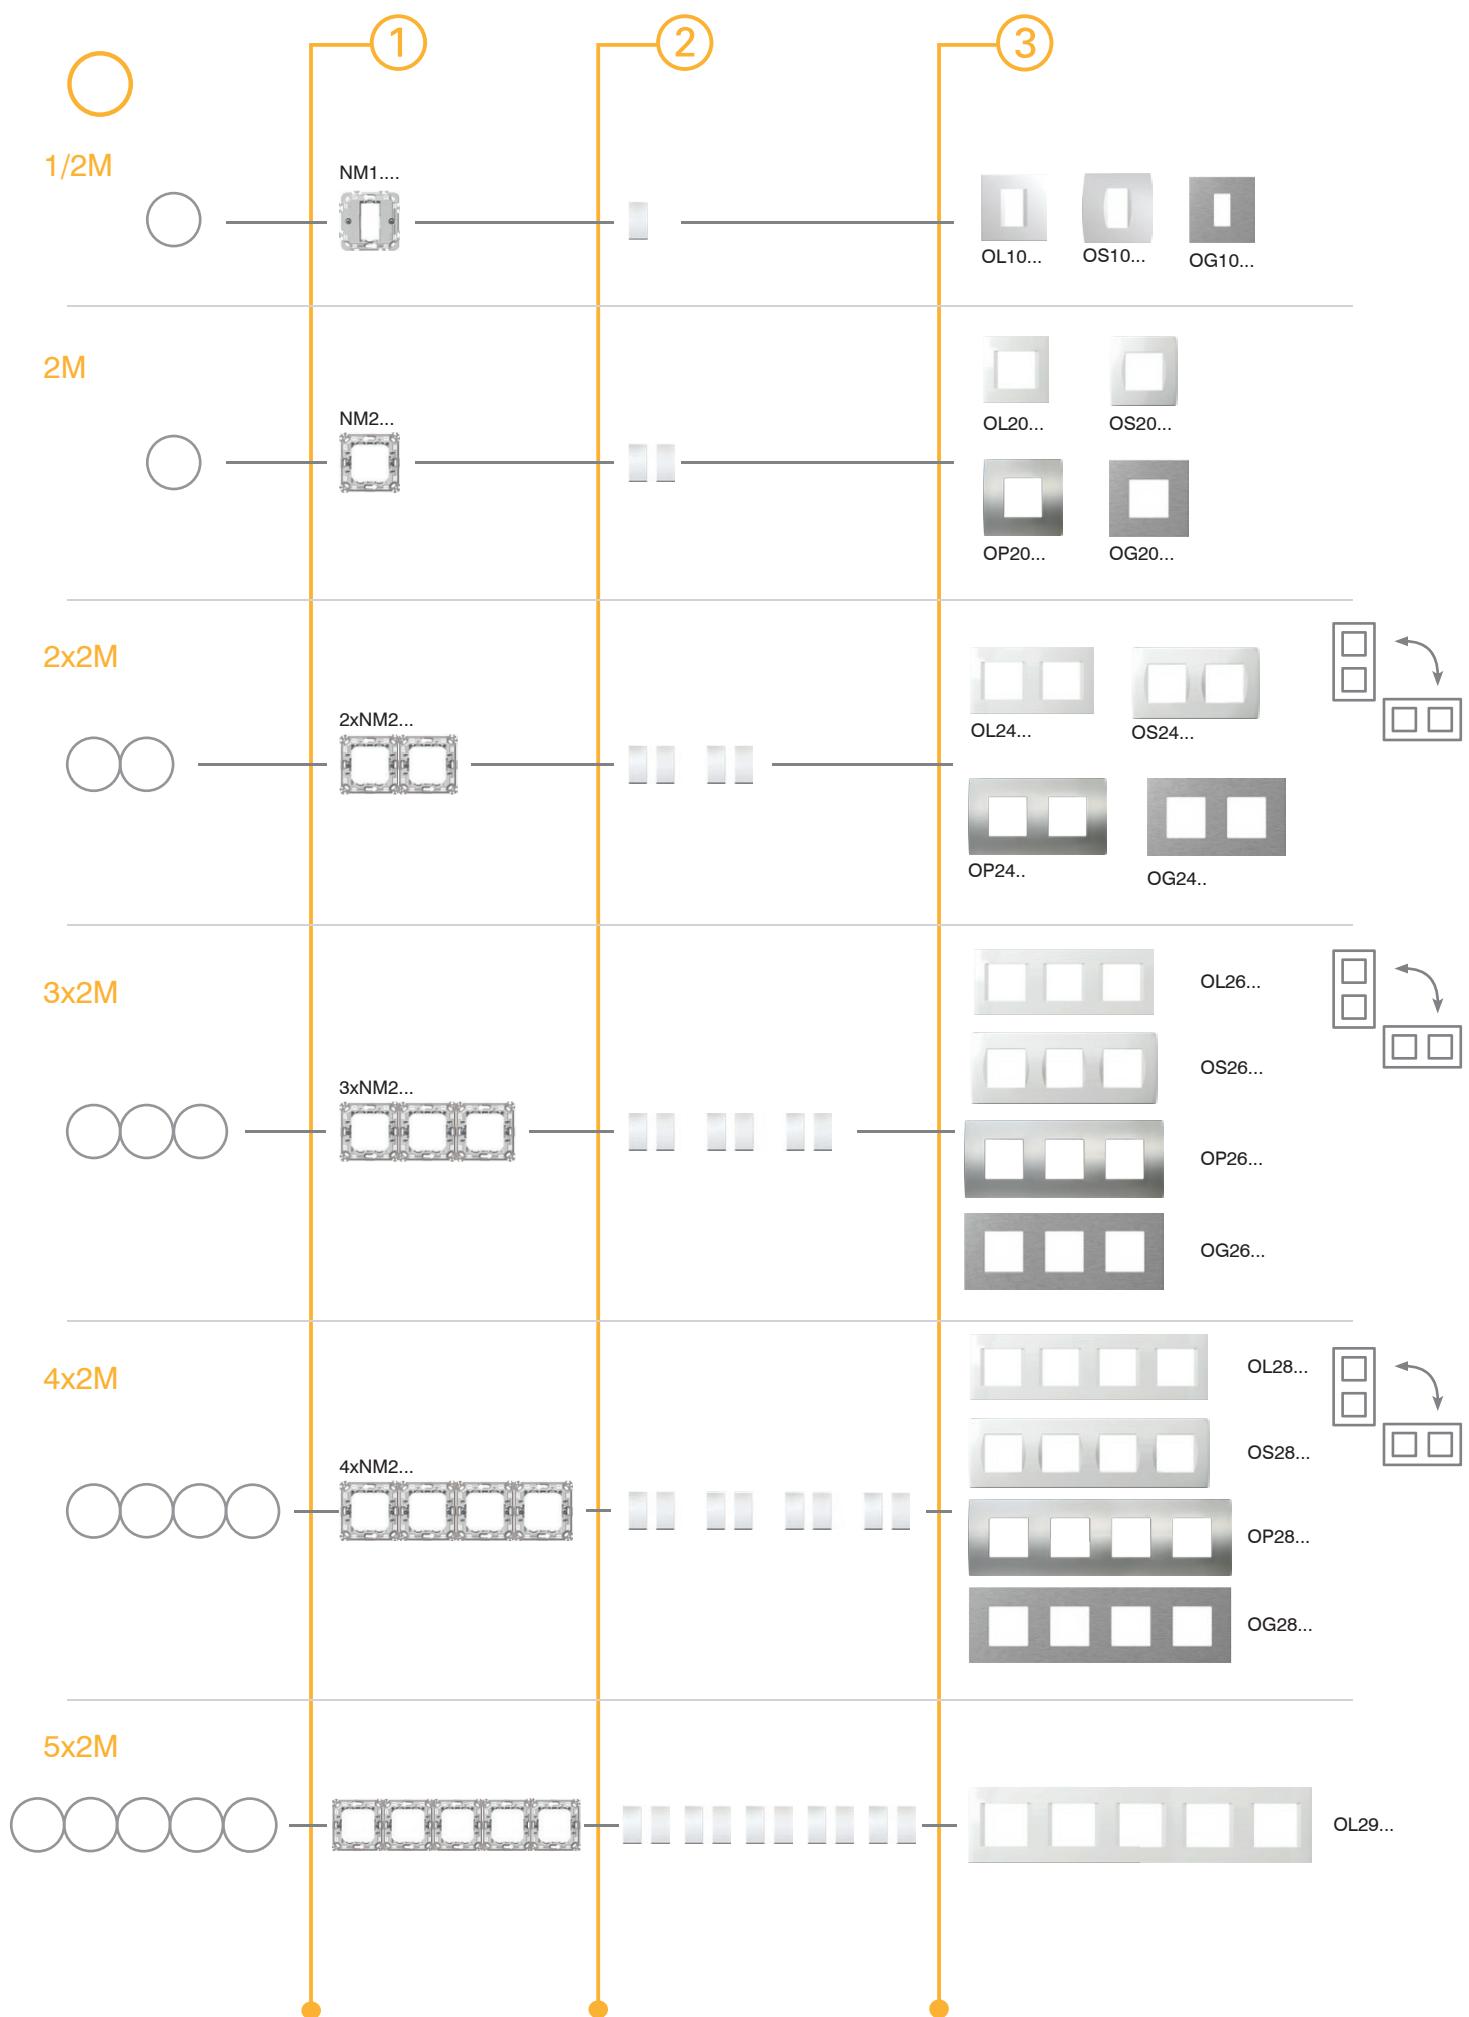

C O M B I N A T I O N S

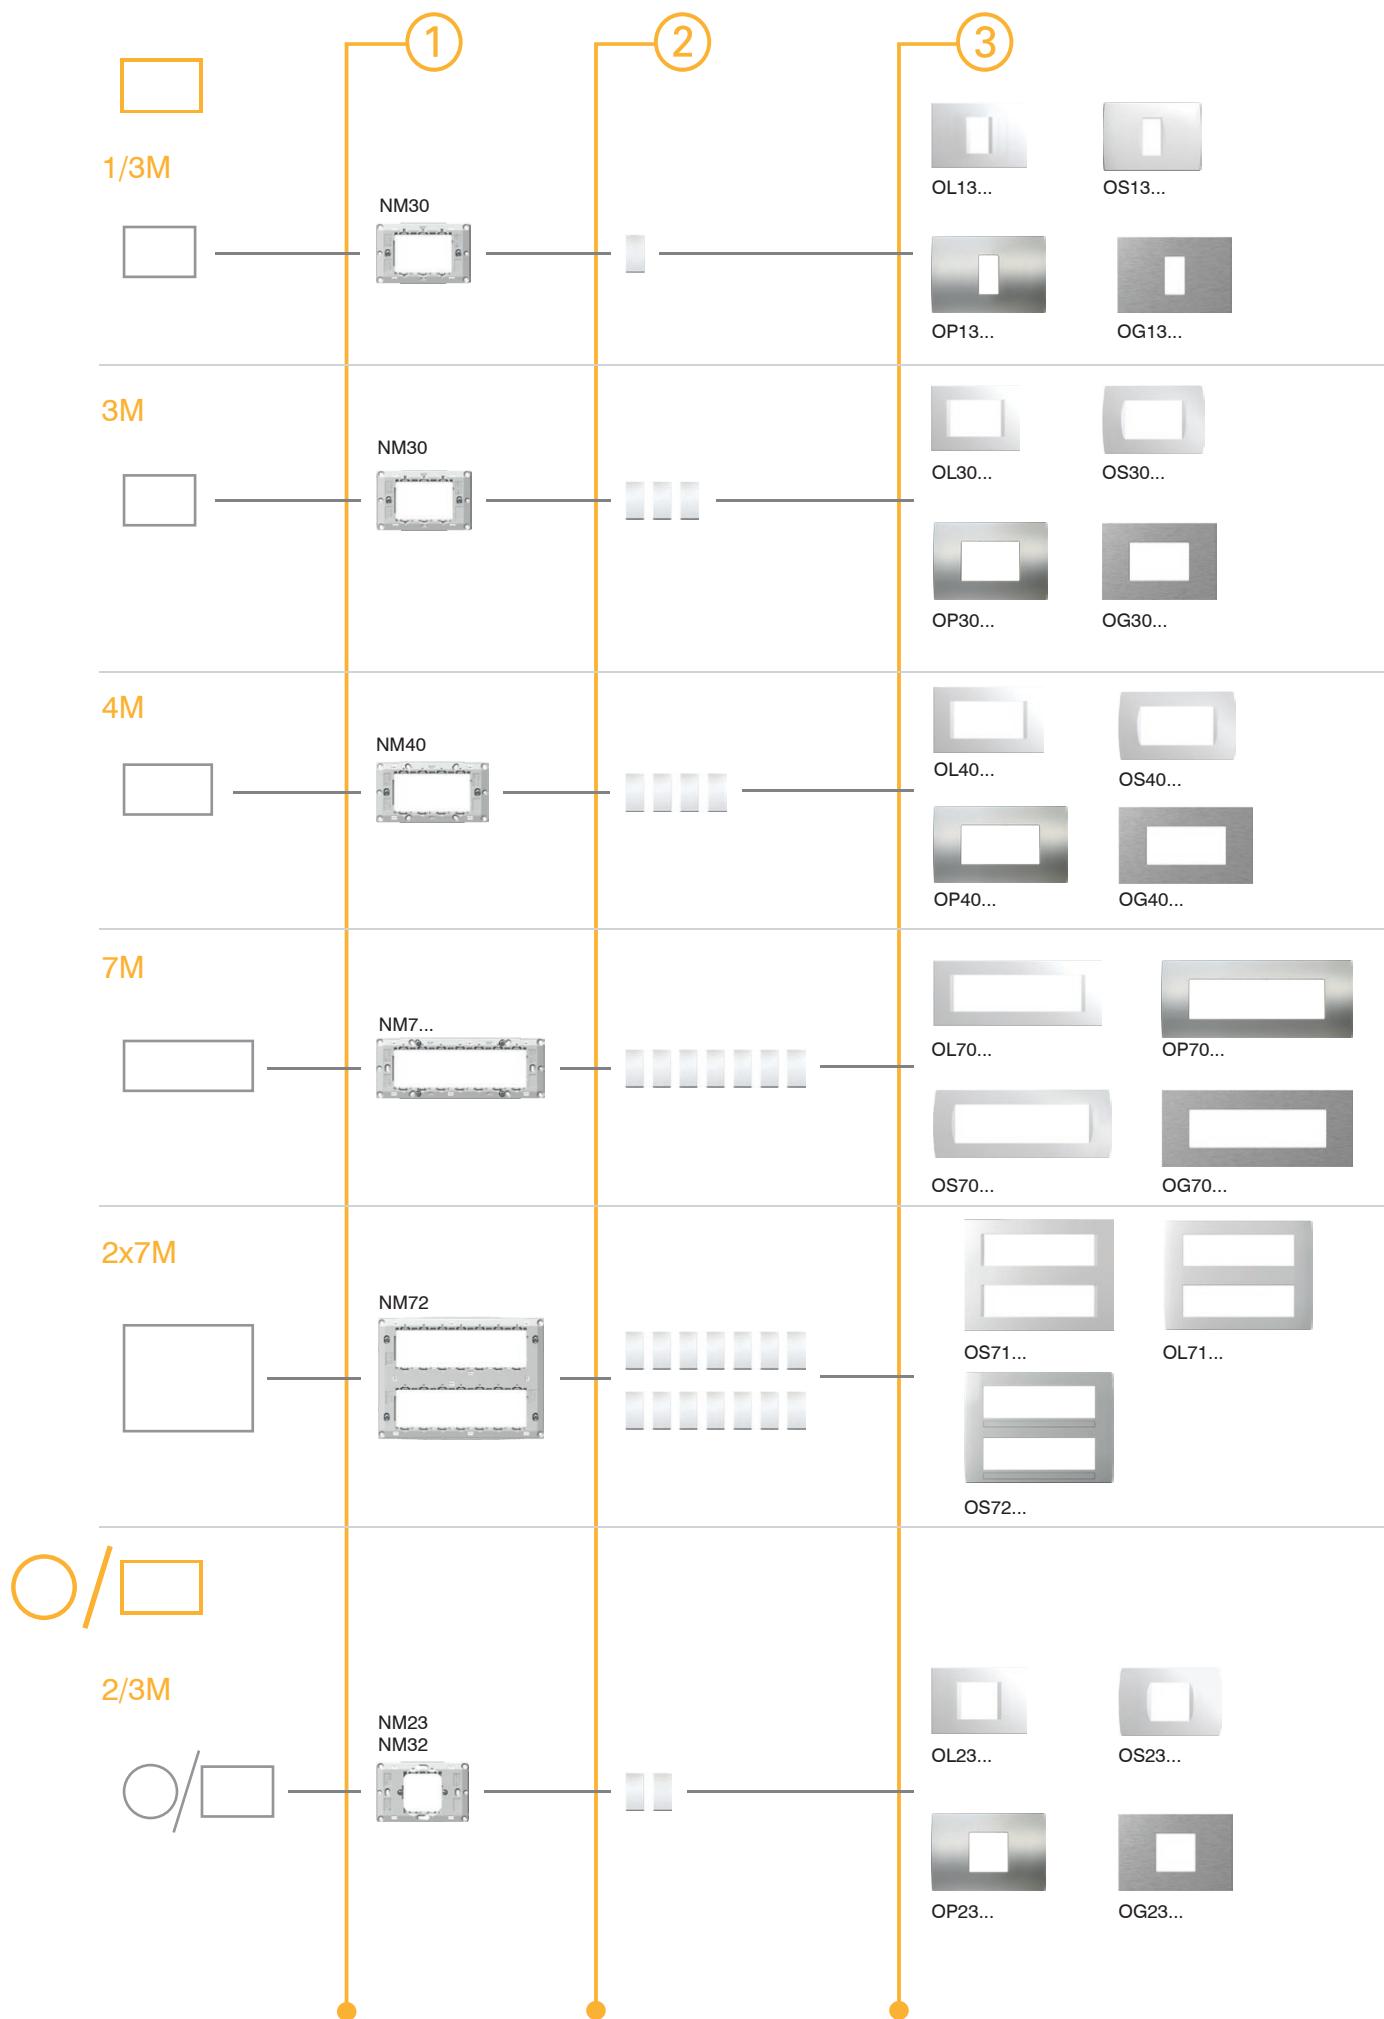



NM30

tip type	naziv description	velikost size
NM10	NOSILEC S KREMPELJCI MOUNTING FRAME WITH CLAWS	1/2M
NM11	NOSILEC BREZ VIJAKOV MOUNTING FRAME WITHOUT SCREWS	1/2M
NM20	NOSILEC S KREMPELJCI MOUNTING FRAME WITH CLAWS	2M
.	.	.



NOSILEC S KREMPELJCI 1/2M




NM10

- nosilec 1/2M s krempeljci
- montaža v doze Ø60 (DE..) s krempeljci
- primeren za sestavo z okvirji LINE, SOFT in EDGE
- ustreza EN 60669-1

MOUNTING FRAME WITH CLAWS 1/2M

- mounting frame 1/2M with claws
- for mounting on boxes Ø60 (DE..) with claws
- suitable for assembling with cover plates LINE, SOFT and EDGE
- in accordance with EN 60669-1




NM11

- nosilec 1/2M brez vijakov in brez krempeljev
- montaža v doze Ø60 (HE.., BE..) z vijaki
- primeren za sestavo z okvirji LINE, SOFT in EDGE
- ustreza EN 60669-1

MOUNTING FRAME WITHOUT SCREWS 1/2M

- mounting frame 1/2M without screws and without claws
- for mounting on boxes Ø60 (HE.., BE..) with screws
- suitable for assembling with cover plates LINE, SOFT and EDGE
- in accordance with EN 60669-1




NM20

- nosilec 2M s krempeljci
- montaža v doze Ø60 (DE..) s krempeljci
- možno horizontalno ali vertikalno nizanje 2x2M, 3x2M in 4x2M
- primeren za sestavo z okvirji LINE, SOFT, PURE in EDGE
- ustreza EN 60669-1

MOUNTING FRAME WITH CLAWS 2M

- mounting frame 2M with claws
- for mounting on boxes Ø60 (DE..) with claws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates LINE, SOFT, PURE and EDGE
- in accordance with EN 60669-1




NM21

- nosilec 2M brez vijakov in brez krempeljev
- montaža v doze Ø60 (HE.., BE..) z vijaki
- možno horizontalno ali vertikalno nizanje 2x2M, 3x2M in 4x2M
- primeren za sestavo z okvirji LINE, SOFT, PURE in EDGE
- ustreza EN 60669-1

MOUNTING FRAME WITHOUT SCREWS 2M

- mounting frame 2M without screws and without claws
- for mounting on boxes Ø60 (HE.., BE..) with screws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates LINE, SOFT, PURE and EDGE
- in accordance with EN 60669-1




MOUNTING FRAMES NM



NM24


NOSILEC KOVINSKI S KREMPELJCI 2M

- kovinski nosilec 2M s kремпелјци - toga izvedba
- montaža v doze Ø60 (DE...) s kремпелјци
- možno horizontalno ali vertikalno nizanje 2x2M, 3x2M in 4x2M
- primeren za sestavo z okvirji LINE, SOFT, PURE in EDGE
- ustreza EN 60669-1




MOUNTING FRAME METAL WITH CLAWS 2M

- metal mounting frame 2M with claws - stiff version
- for mounting on boxes Ø60 (DE...) with claws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates LINE, SOFT, PURE and EDGE
- in accordance with EN 60669-1



NM25

- NOSILEC KOVINSKI BREZ VIJAKOV 2M**
- kovinski nosilec brez vijakov in brez kремпелјcev - toga izvedba
 - montaža v doze Ø60 (HE., BE...) z vijaki
 - možno horizontalno ali vertikalno nizanje 2x2M, 3x2M in 4x2M
 - primeren za sestavo z okvirji LINE, SOFT, PURE in EDGE
 - ustreza EN 60669-1




MOUNTING FRAME METAL WITHOUT SCREWS 2M

- metal mounting frame 2M without screws and without claws - stiff version
- for mounting in boxes Ø60 (HE..., BE...) with screws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates LINE, SOFT, PURE and EDGE
- in accordance with EN 60669-1



NM26

- NEW**
- NOSILEC OJAČEN S KREMPELJCI 2M**
- ojačen nosilec 2M s kремпелјci - toga izvedba
 - montaža v doze Ø60 (DE...) s kремпелјci
 - možno horizontalno ali vertikalno nizanje 2x2M, 3x2M in 4x2M
 - primeren za sestavo z okvirji LINE, SOFT, PURE in EDGE
 - ustreza EN 60669-1




CLAW REINFORCED MOUNTING FRAME 2M

- 2M mounting frame reinforced with claws - stiff version
- for mounting on boxes Ø60 (DE...) with claws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates LINE, SOFT, PURE and EDGE
- in accordance with EN 60669-1



NM27

- NEW**
- NOSILEC OJAČEN BREZ VIJAKOV 2M**
- ojačen nosilec brez vijakov in brez kремпелјcev - toga izvedba
 - montaža v doze Ø60 (HE., BE...) z vijaki
 - možno horizontalno ali vertikalno nizanje 2x2M, 3x2M in 4x2M
 - primeren za sestavo z okvirji LINE, SOFT, PURE in EDGE
 - ustreza EN 60669-1




REINFORCED MOUNTING FRAME WITHOUT SCREWS 2M

- reinforced mounting frame without screws or claws - stiff version
- for mounting in boxes Ø60 (HE..., BE...) with screws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates LINE, SOFT, PURE and EDGE
- in accordance with EN 60669-1



NM23

- NOSILEC S KREMPELJCI 2/3M**
- nosilec 2/3M s kремпелјci
 - montaža v doze Ø60 (DE...) s kремпелјci
 - primeren za sestavo z okvirji LINE, SOFT, PURE in EDGE
 - ustreza EN 60669-1



MOUNTING FRAME WITH CLAWS 2/3M

- mounting frame 2/3M with claws
- for mounting on boxes Ø60 (DE...) with claws
- suitable for assembling with cover plates LINE, SOFT, PURE and EDGE
- in accordance with EN 60669-1




NM30

NOSILEC Z VIJAKI 3M

- nosilec 3M z vijaki
- montaža v pravokotne doze velikosti 3M
- primeren za sestavo z okvirji LINE, SOFT, PURE in EDGE
- ustreza EN 60669-1

MOUNTING FRAME WITH SCREWS 3M

- mounting frame 3M with screws
- for mounting on rectangular boxes 3M
- suitable for assembling with cover plates LINE, SOFT, PURE and EDGE
- in accordance with EN 60669-1




NM40

NOSILEC Z VIJAKI 4M

- nosilec 4M z vijaki
- montaža v pravokotne doze velikosti 4M
- primeren za sestavo z okvirji LINE, SOFT, PURE in EDGE
- ustreza EN 60669-1

MOUNTING FRAME WITH SCREWS 4M

- mounting frame 4M with screws
- for mounting on rectangular boxes 4M
- suitable for assembling with cover plates LINE, SOFT, PURE and EDGE
- in accordance with EN 60669-1

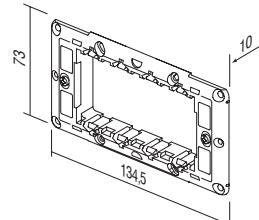


NM70

NOSILEC Z VIJAKI 7M

- nosilec 7M z vijaki
- montaža v pravokotne doze velikosti 7M
- primeren za sestavo z okvirji 7M
- ustreza EN 60669-1

MOUNTING FRAME WITH SCREWS 7M

- mounting frame 7M with screws
- for mounting on rectangular boxes 7M
- suitable for assembling with cover plates 7M
- in accordance with EN 60669-1





NM75

NOSILEC OJAČEN Z VIJAKI 7M

- ojačen nosilec 7M z vijaki – toga izvedba
- montaža v pravokotne doze velikosti 7M
- primeren za sestavo z okvirji 7M
- ustreza EN 60669-1

REINFORCED MOUNTING FRAME WITH SCREWS 7M

- reinforced mounting frame 7M with screws – stiff version
- for mounting on rectangular boxes 7M
- suitable for assembling with cover plates 7M
- in accordance with EN 60669-1

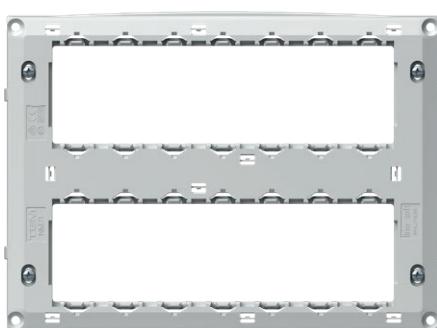


NM72

NOSILEC Z VIJAKI 2x7M


- nosilec 2x7M z vijaki
- montaža v pravokotne doze velikosti 2x7M
- primeren za sestavo z okvirji 2x7M
- ustreza EN 60669-1

MOUNTING FRAME WITH SCREWS 2x7M

- mounting frame 2x7M with screws
- for mounting on rectangular boxes 2x7M
- suitable for assembling with cover plates 2x7M
- in accordance with EN 60669-1

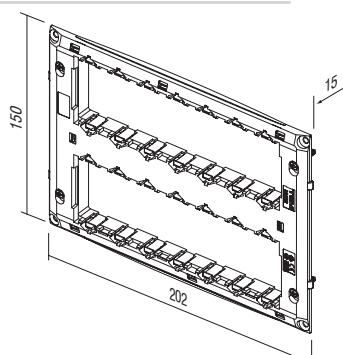

M O U N T I N G F R A M E S N M

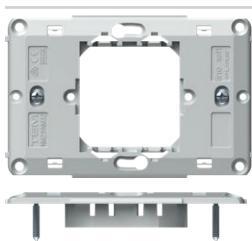


NM32

NOSILEC Z VIJAKI 2/3M

- nosilec 2/3M z vijaki
- montaža v pravokotne doze velikosti 3M
- primeren za sestavo z okvirji LINE, SOFT, PURE in EDGE
- ustreza EN 60669-1

MOUNTING FRAME WITH SCREWS 2/3M

- mounting frame 2/3M with screws
- for mounting on rectangular boxes 3M
- suitable for assembling with cover plates LINE, SOFT, PURE and EDGE
- in accordance with EN 60669-1





136



144




152




154



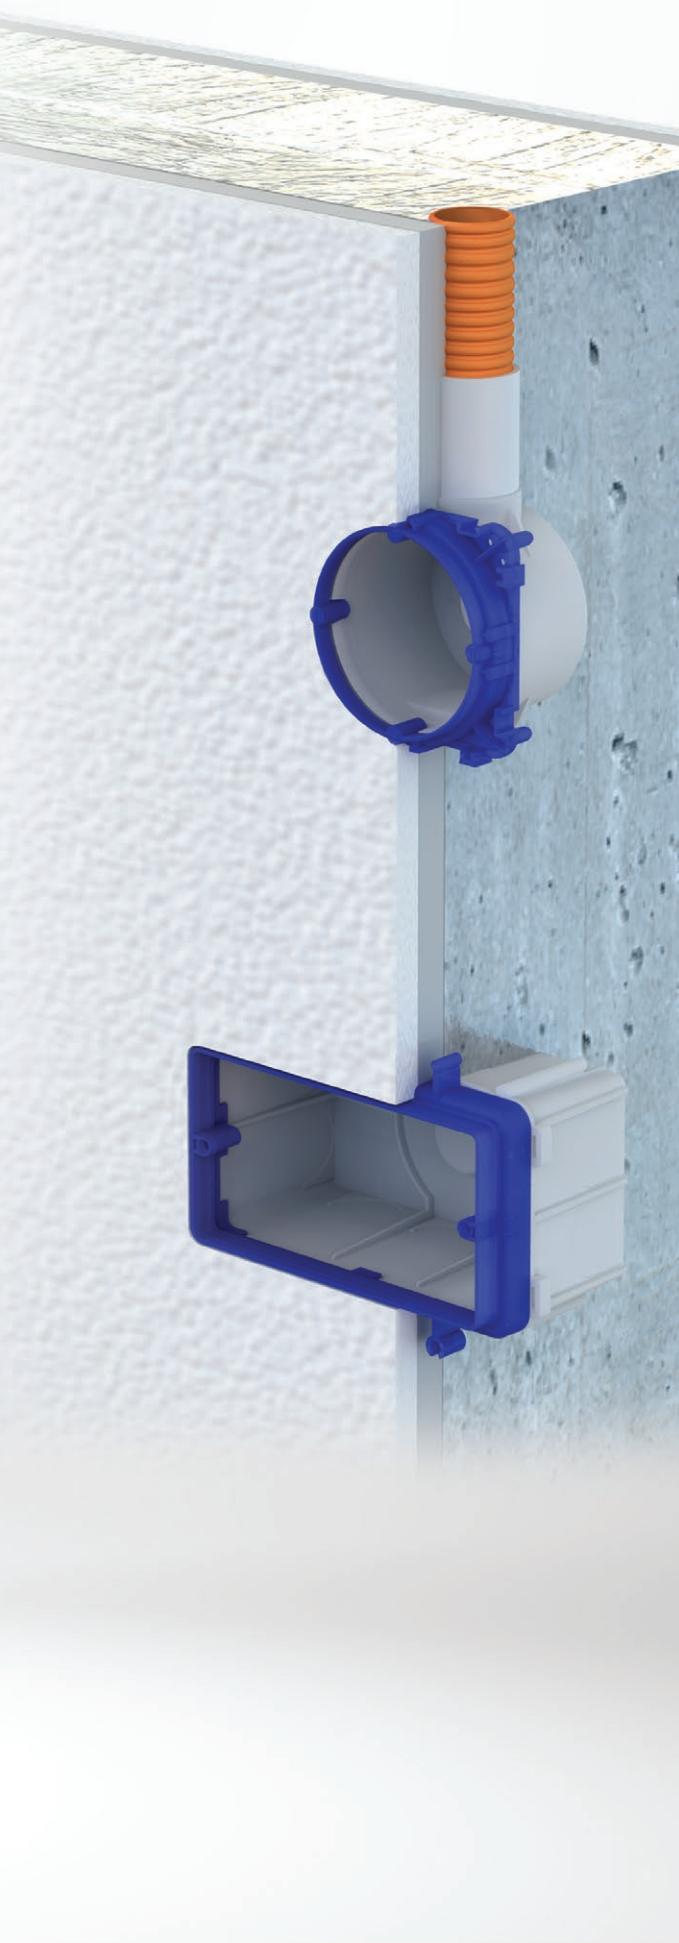

DOZE

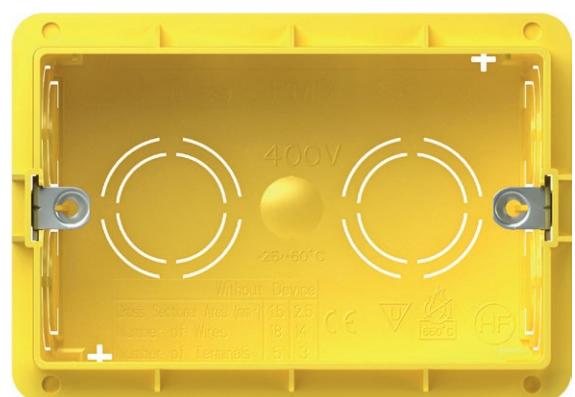

TEM



DE12



HE11



BE10

tip type	naziv description	velikost size
DE10	DOZA OKROGLA ZA ZID ROUND BOX BRICK	SM60-01
HE10	DOZA OKROGLA ZA VOTLE STENE ROUND BOX HOLLOW WALL	SM68X40
BE10	DOZA OKROGLA ZA BETON ROUND BOX CONCRETE	
.	.	.
.	.	.
.	.	.

DOZA OKROGLA ZA ZID SM60-01




DE10

- Ø60, globina 40mm
- 650°C, 500V~
- ustreza IEC 60670-1
- "halogen free"
- možnost pritrditve nosilca z vijaki Ø 3 mm

ROUND BOX BRICK SM60-01

- Ø60, depth 40mm
- 650°C, 500V~
- in accordance with IEC 60670-1
- halogen free
- option of mounting the mounting frame with Ø 3 mm screws



DOZA OKROGLA ZA ZID GLOBOKA SM60-06




DE11

- Ø60, globina 60mm
- 650°C, 500V~
- ustreza IEC 60670-1
- "halogen free"
- možnost pritrditve nosilca z vijaki Ø 3 mm

ROUND BOX BRICK DEEP SM60-06

- Ø60, depth 60mm
- 650°C, 500V~
- in accordance with IEC 60670-1
- halogen free
- option of mounting the mounting frame with Ø 3 mm screws



VEZNI ČLEN DOZE ZA ZID SM60-03



DE30

- za vertikalno povezavo doz SM60-06 ali SM60-01
- na razdaljo 91 mm
- ustreza IEC 60670-1
- "halogen free"

COMBI-CLIP SM60-03

- for vertical fitting of boxes SM60-06 or SM60-01 on distance 91 mm
- in accordance with IEC 60670-1
- halogen free



VEZNI ČLEN DOZE ZA ZID SM60-04




DE31

- za horizontalno povezavo doz SM60-06 ali SM60-01
- na razdaljo 71mm
- ustreza IEC 60670-1
- "halogen free"

COMBI-CLIP SM60-04

- for horizontal fitting of boxes SM60-06 or SM60-01 on distance 71mm
- in accordance with IEC 60670-1
- halogen free



ROUND BOXES




DE12

DOZA OKROGLA ZA ZID MD65-46

- Ø65, globina 46mm
- 650°C, 500V~
- ustreza IEC 60670-1
- "halogen free"
- možnost pritrditve nosilca z vijaki Ø 3 mm

ROUND BOX BRICK MD65-46

- Ø65, depth 46mm
- 650°C, 500V~
- in accordance with IEC 60670-1
- halogen free
- option of mounting the mounting frame with Ø 3 mm screws




DE13

DOZA OKROGLA ZA ZID GLOBOKA MD65-60

- Ø65/60, globina 62mm
- 650°C, 500V~
- ustreza IEC 60670-1
- "halogen free"
- možnost pritrditve nosilca z vijaki Ø 3 mm

ROUND BOX BRICK DEEP MD65-60

- Ø65/60, depth 62mm
- 650°C, 500V~
- in accordance with IEC 60670-1
- halogen free
- option of mounting the mounting frame with Ø 3 mm screws




DE14

PODALJŠEK DOZE ZA ZID MD65-66

- Ø65/60, globina 17mm
- 650°C, 500V~
- ustreza IEC 60670-1
- "halogen free"

ADDITIONAL PIECE FOR MD65-66

- Ø65/60, depth 17mm
- 650°C, 500V~
- in accordance with IEC 60670-1
- halogen free




DE32

VEZNI ČLEN DOZE ZA ZID MD65-71

- za povezavo doz MD65 na razdaljo 71 mm
- ustreza IEC 60670-1
- "halogen free"

COMBI-CLIP MD65-71

- for fitting of boxes MD65 on distance 71mm
- in accordance with IEC 60670-1
- halogen free




DE33

VEZNI ČLEN DOZE ZA ZID MD65-91

- za povezavo doz MD65 na razdaljo 91mm
- ustreza IEC 60670-1
- "halogen free"

COMBI-CLIP MD65-91

- for fitting of boxes MD65 on distance 91mm
- in accordance with IEC 60670-1
- halogen free




DE20

POKROV DOZE ZAŠČITNI 60

- zaščitni pokrov doze Ø60 za DE10, DE11, DE13, DE14
- ustreza IEC 60670-1
- za zaščito pri ometavanju

BOX COVER PROTECTIVE 60

- protective cover for box Ø60 for DE10, DE11, DE13, DE14
- in accordance with IEC 60670-1
- box protection during plastering




DE21

POKROV DOZE ZAŠČITNI 65

- zaščitni pokrov doze Ø65 za DE12
- ustreza IEC 60670-1
- za zaščito pri ometavanju

BOX COVER PROTECTIVE 65

- protective cover for box Ø65 for DE12
- in accordance with IEC 60670-1
- box protection during plastering




DE22

POKROV DOZE DEKORATIVNI SM60

- dekorativni pokrov doze Ø60
- ustreza IEC 60670-1
- "halogen free"

BOX COVER DECORATIVE SM60



- decorative cover for boxes Ø60
- in accordance with IEC 60670-1
- halogen free







navodila za montažo /
assembly instructions



DE10,11




razdalja med dozami /
distance between boxes: 71mm








razdalja med dozami /
distance between boxes: 91mm

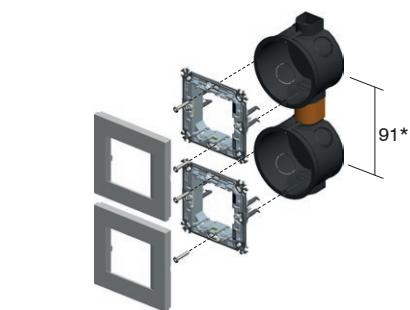

DE12,13




$$\text{yellow ring} + \text{yellow box} = \text{yellow box}$$

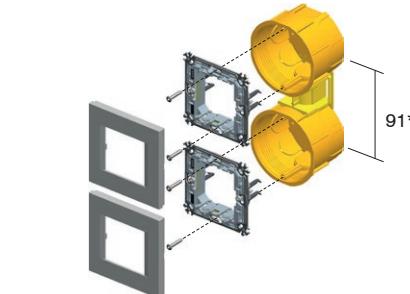

* za okvirje PURE, EDGE je min. razdalja med dozami
100mm

* for PURE, EDGE cover plates the minimum distance
between boxes is 100mm

R O U N D B O X E S

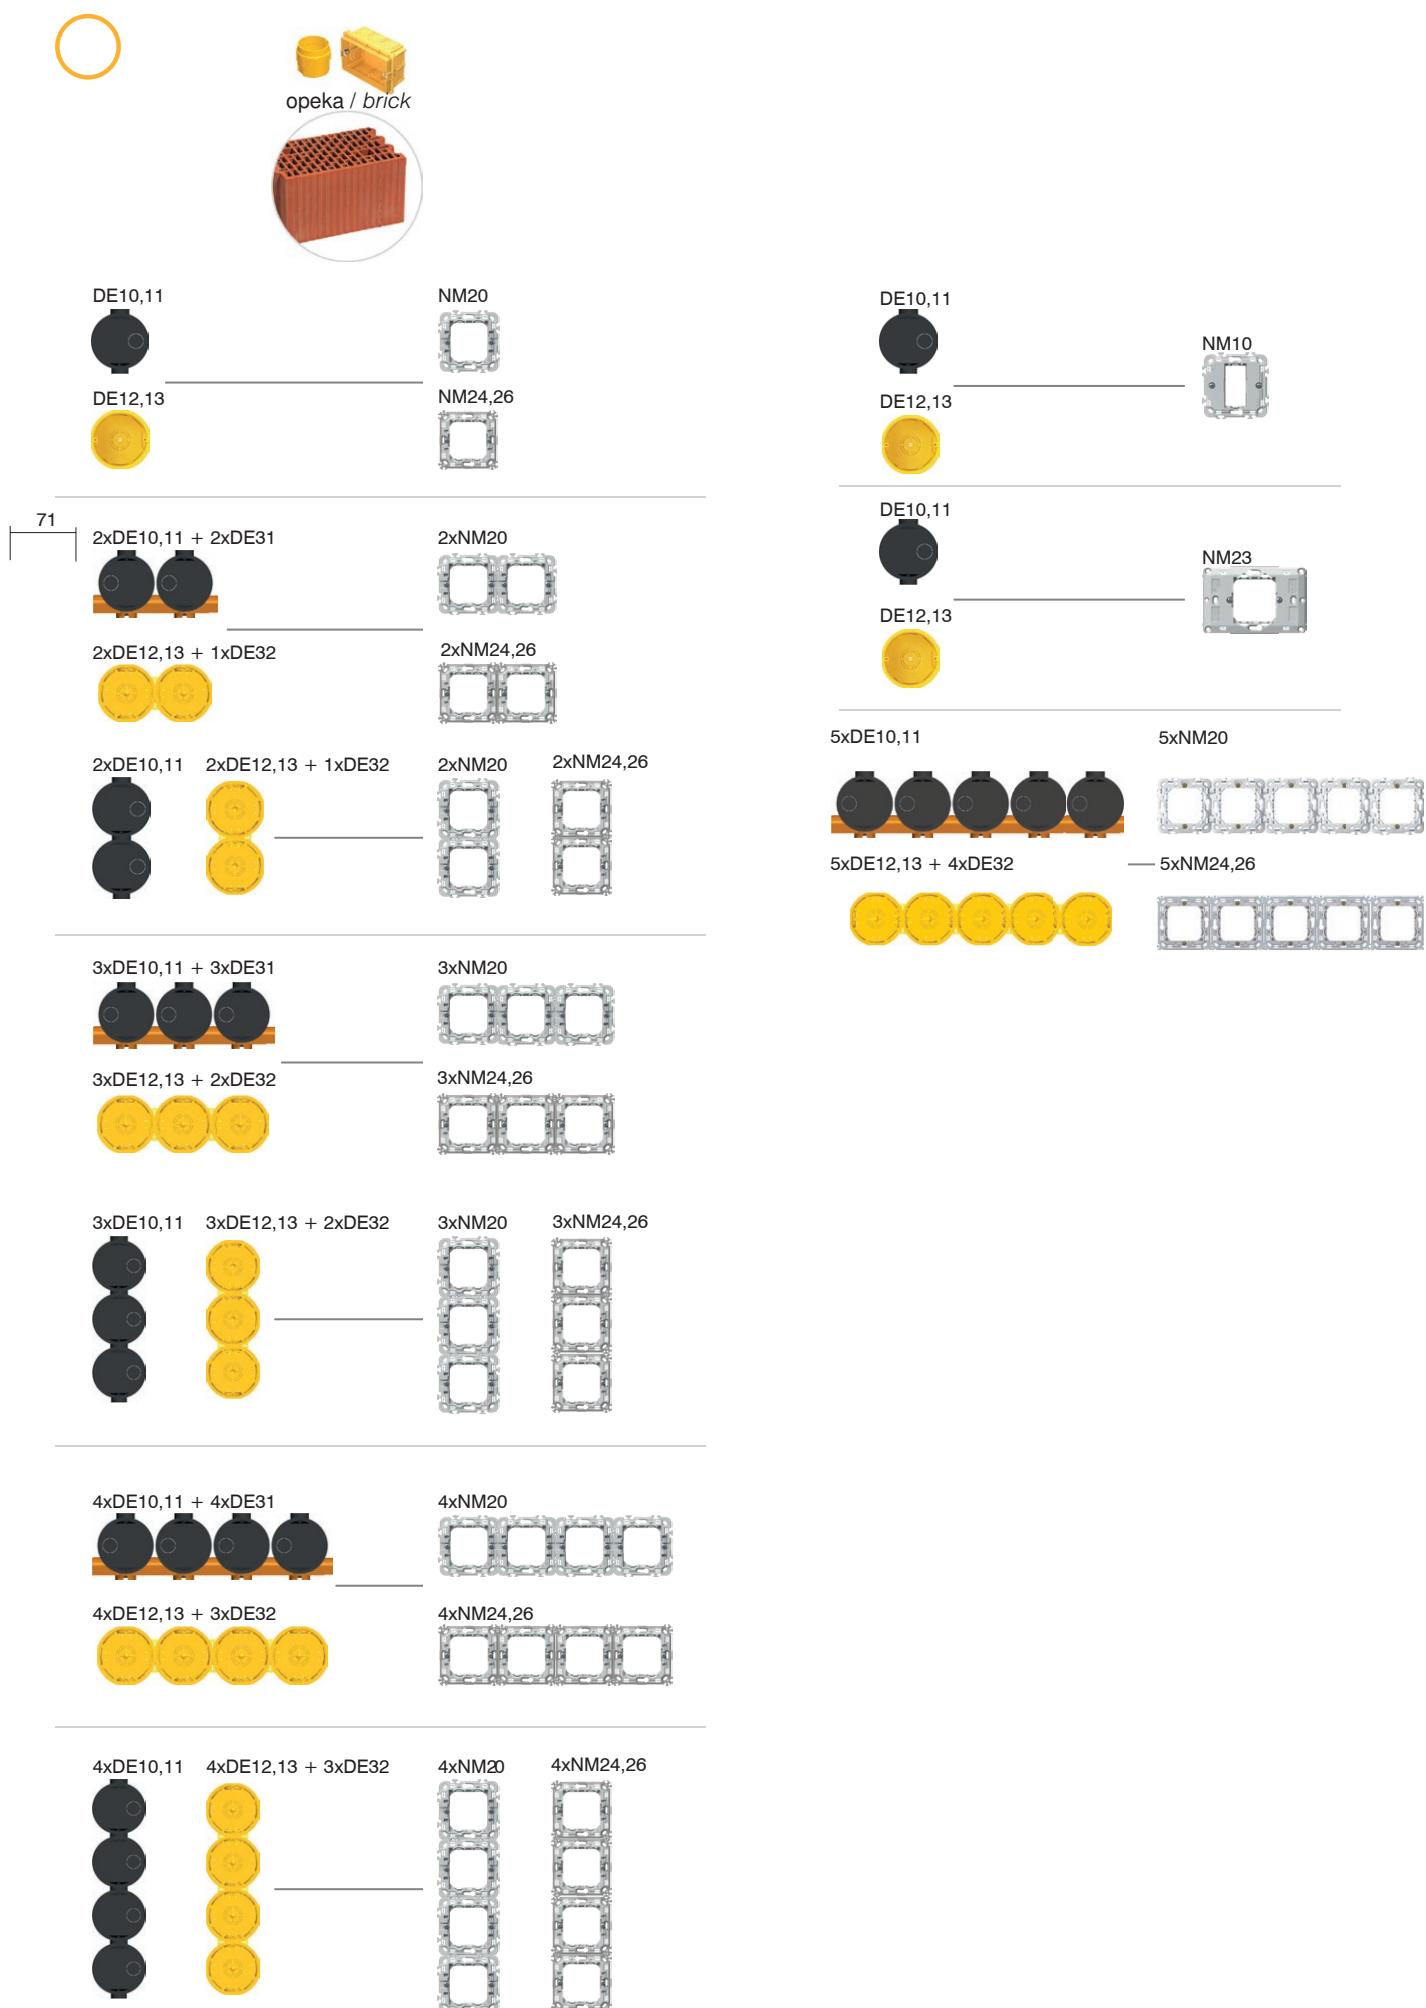


DOZA OKROGLA ZA VOTLE STENE SM68x40



HE10

- Ø60, globina 40mm
- vgradnja v izvrtino Ø68
- 850°C, 400V~
- ustrez IEC 60670-1
- montaža s krempeljci
- "halogen free"
- pritrditve nosilca z vijaki Ø 3 mm

ROUND BOX HOLLOW WALL SM68x40



- Ø60, depth 40mm
- cutting hole Ø68
- 850°C, 400V~
- in accordance with IEC 60670-1
- mounting with claws
- halogen free
- mounting the mounting frame with Ø 3 mm screws


DOZA OKROGLA ZA VOTLE STENE SM68x55



HE11

- Ø60, globina 55mm
- vgradnja v izvrtino Ø68
- 850°C, 400V~
- ustrez IEC 60670-1
- montaža s krempeljci
- "halogen free"
- pritrditve nosilca z vijaki Ø 3 mm

ROUND BOX HOLLOW WALL SM68x55



- Ø60, depth 55mm
- cutting hole Ø68
- 850°C, 400V~
- in accordance with IEC 60670-1
- mounting with claws
- halogen free
- mounting the mounting frame with Ø 3 mm screws


DOZA OKROGLA ZA BETON



BE10

- Ø60mm, globina 49mm
- 650°C, 500V~
- ustrez IEC 60670-1
- "halogen free"
- pritrditve nosilca z vijaki Ø 3 mm

ROUND BOX CONCRETE



- Ø60mm, depth 49mm
- 650°C, 500V~
- in accordance with IEC 60670-1
- halogen free
- mounting the mounting frame with Ø 3 mm screws


DOZA OKROGLA ZA BETON GLOBOKA



BE11

- Ø60mm, globina 58mm
- 650°C, 500V~
- ustrez IEC 60670-1
- "halogen free"
- pritrditve nosilca z vijaki Ø 3 mm

ROUND BOX CONCRETE DEEP




- Ø60mm, depth 58mm
- 650°C, 500V~
- in accordance with IEC 60670-1
- halogen free
- mounting the mounting frame with Ø 3 mm screws

NOSILEC DOZE ZA BETON



BE20

- za utrditev doze z distančnim profilom BM82 v nasprotno steno
- ustrez IEC 60670-1
- "halogen free"



COUNTER BOX SUPPORT CONCRETE

- to support concrete boxes with distance profile BM82 for extreme loads
- in accordance with IEC 60670-1
- halogen free


UVODNICA DOZE ZA BETON 16



BE21

- za utrditev instalacijske cevi
- ustrez IEC 60670-1
- "halogen free"

PIPE STOPPER CONCRETE BOX 16



- for firming installation pipe to box
- in accordance with IEC 60670-1
- halogen free

R O U N D

B O X E S

votle stene / hollow walls




beton / concrete




navodila za montažo /
assembly instructions




HE10,11









razdalja med dozami /
distance between boxes: 71mm

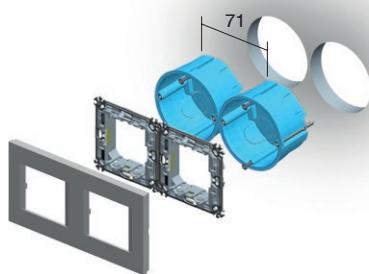

razdalja med dozami /
distance between boxes: 91mm

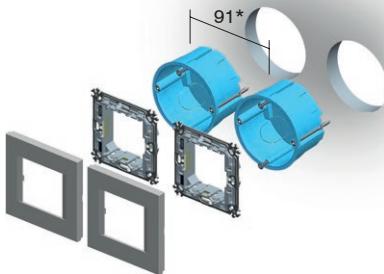

BE10

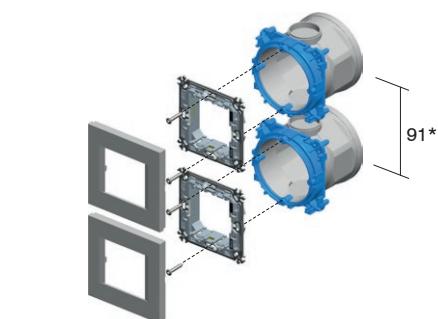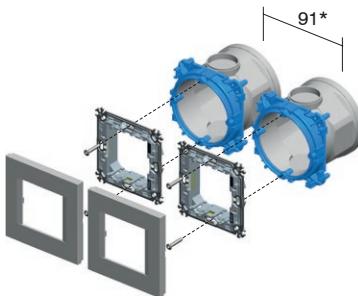

* za okvirje PURE, EDGE je min. razdalja med dozami 100mm

* for PURE, EDGE cover plates the minimum distance between boxes is 100mm

votle stene / hollow walls



beton / concrete



HE10,11



BE10,11



NM21



NM25,27



2M

2xHE10,11



2xBE10,11



2xNM21



2xNM25,27




2x2M

2xHE10,11



2xBE10,11



2xNM21



2xNM25,27



3xHE10,11



3xBE10,11



3xNM21




3xNM25,27



3x2M

3xHE10,11



3xBE10,11



3xNM21



3xNM25,27

4xHE10,11



4xBE10,11



4xNM21




4xNM25,27




4x2M


4xHE10,11



4xBE10,11



4xNM21



4xNM25,27



HE10,11



BE10,11



1/2M

HE10,11



BE10,11



2/3M

5xHE10,11



5xNM21



5xBE10,11




5xNM25,27




5x2M

R O U N D B O X E S

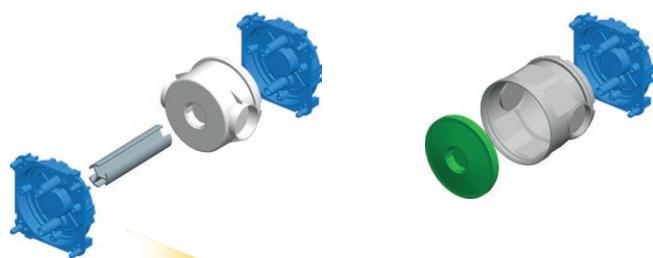


navodila za montažo /
assembly instructions


1

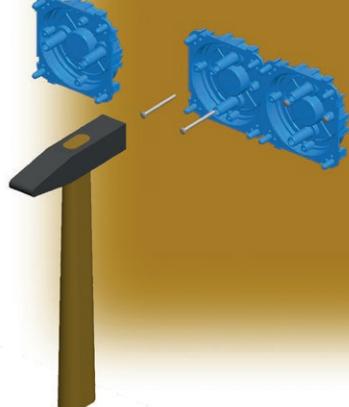


2

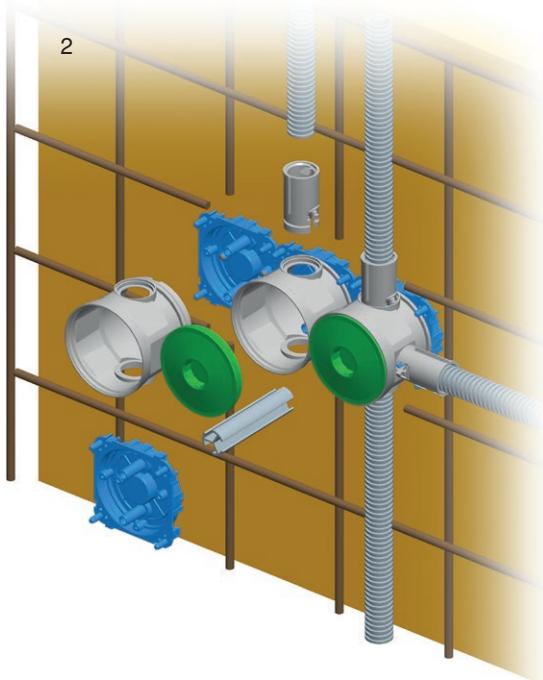

3

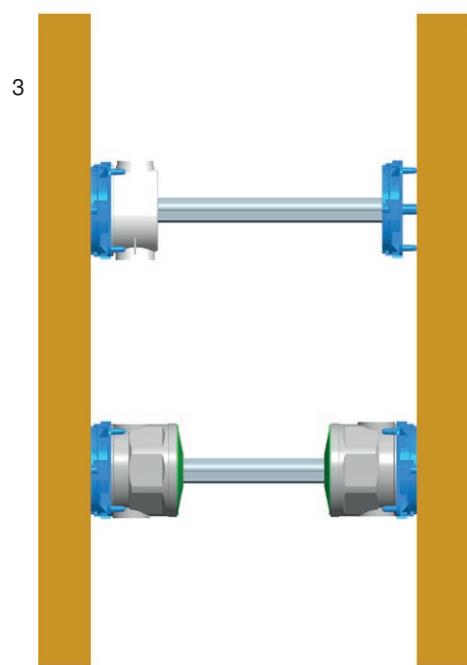

4

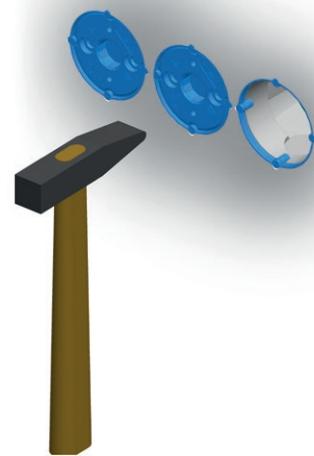



DM30



HM30



BM30

tip type	naziv description	velikost size
DM30	DOZA PRAVOKOTNA ZA ZID <i>RECTANGULAR BOX BRICK</i>	PM3
HM30	DOZA PRAVOKOTNA ZA VOTLE STENE <i>RECTANGULAR BOX HOLLOW WALL</i>	VM3
BM30	DOZA PRAVOKOTNA ZA BETON <i>RECTANGULAR BOX CONCRETE</i>	BM3
.	.	.
.	.	.
.	.	.


DOZA PRAVOKOTNA ZA ZID PM3



DM30

- velikost 3M, globina 49mm
- 650°C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX BRICK PM3
 - size 3M, depth 49mm
 - 650°C, 400V~
 - in accordance with IEC 60670-1
 - halogen free




DOZA PRAVOKOTNA ZA ZID PM3-65



DM31

- velikost 3M, globina 65mm
- 650°C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX BRICK PM3-65
 - size 3M, depth 65mm
 - 650°C, 400V~
 - in accordance with IEC 60670-1
 - halogen free




DOZA PRAVOKOTNA ZA ZID PM4



DM40

- velikosti 4M, globina 49mm
- 650°C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX BRICK PM4
 - size 4M, depth 49mm
 - 650°C, 400V~
 - in accordance with IEC 60670-1
 - halogen free




DOZA PRAVOKOTNA ZA ZID PM4-65



DM41

- velikosti 4M, globina 65mm
- 650°C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX BRICK PM4-65
 - size 4M, depth 65mm
 - 650°C, 400V~
 - in accordance with IEC 60670-1
 - halogen free



RECTANGULAR BOXES




DM70

DOZA PRAVOKOTNA ZA ZID PM7

- velikost 7M, globina 49mm
- 650 °C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX BRICK PM7

- size 7M, depth 49mm
- 650 °C, 400V~
- in accordance with IEC 60670-1
- halogen free

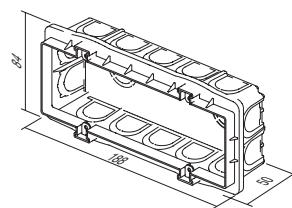


DM71

DOZA PRAVOKOTNA ZA ZID PM7-65

- velikost 7M, globina 65mm
- 650 °C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX BRICK PM7-65

- size 7M, depth 65mm
- 650 °C, 400V~
- in accordance with IEC 60670-1
- halogen free

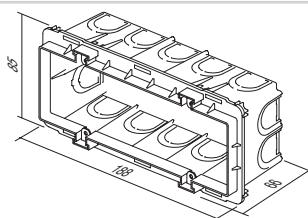


DM72

DOZA PRAVOKOTNA ZA ZID PM72-65

- velikost 2x7M, globina 64mm
- 650 °C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX BRICK PM72-65

- size 2x7M, depth 64mm
- 650 °C, 400V~
- in accordance with IEC 60670-1
- halogen free

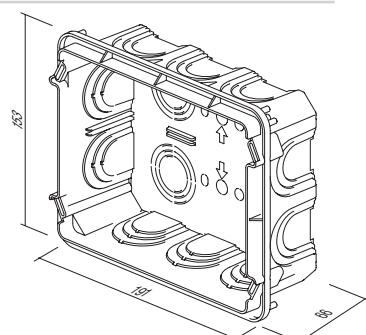





DM80

VEZNI ČLEN DOZE PM

- za vertikalno (A) in horizontalno (B) sestavo doz PM3, PM4 in PM7
- primeren za dekorativne okvirje Line in Soft (za PURE in EDGE ni primeren)

DISTANCE PIECE FOR BOX PM

- for vertical (A) and horizontal (B) fitting of boxes PM3, PM4 and PM7
- suitable for Line and Soft decorative cover plates (not for PURE and EDGE)

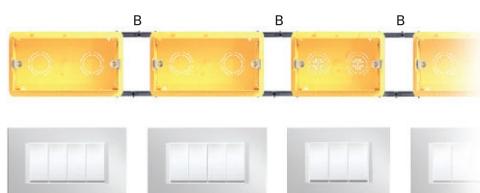

POKROV DOZE ZAŠČITNI PM3




DM33

- zaščitni pokrov doze PM3
- ustreza IEC 60670-1
- "halogen free"
- za zaščito pri ometavanju

BOX COVER PROTECTIVE PM3

- protective cover for box PM3
- in accordance with IEC 60670-1
- halogen free
- box protection during plastering



POKROV DOZE DEKORATIVNI PM3




DM34

- dekorativni pokrov doze 3M
- vijaka priložena
- ustreza IEC 60670-1
- "halogen free"

BOX COVER DECORATIVE PM3

- decorative cover for boxes 3M
- screws are included
- in accordance with IEC 60670-1
- halogen free



POKROV DOZE ZAŠČITNI PM4




DM43

- zaščitni pokrov doze PM4
- ustreza IEC 60670-1
- "halogen free"
- za zaščito pri ometavanju

BOX COVER PROTECTIVE PM4

- protective cover for box PM4
- in accordance with IEC 60670-1
- halogen free
- box protection during plastering



POKROV DOZE DEKORATIVNI PM4




DM44


- dekorativni pokrov doze 4M
- vijaka priložena
- ustreza IEC 60670-1
- "halogen free"

BOX COVER DECORATIVE PM4

- decorative cover for boxes 4M
- screws are included
- in accordance with IEC 60670-1
- halogen free



POKROV DOZE ZAŠČITNI PM7




DM73

- zaščitni pokrov doze PM7
- ustreza IEC 60670-1
- "halogen free"
- za zaščito pri ometavanju

BOX COVER PROTECTIVE PM7

- protective cover for box PM7
- in accordance with IEC 60670-1
- halogen free
- box protection during plastering



POKROV DOZE DEKORATIVNI PM7




DM74

- dekorativni pokrov doze 7M
- vijaka priložena
- ustreza IEC 60670-1
- "halogen free"

BOX COVER DECORATIVE PM7

- decorative cover for boxes 7M
- screws are included
- in accordance with IEC 60670-1
- halogen free



RECTANGULAR BOXES




DM75

POKROV DOZE DEKORATIVNI PM72

- dekorativni pokrov doze 2x7M
- vijaki priloženi
- ustreza IEC 60670-1

BOX COVER DECORATIVE PM72

- decorative cover for boxes 2x7M
- screws are included
- in accordance with IEC 60670-1

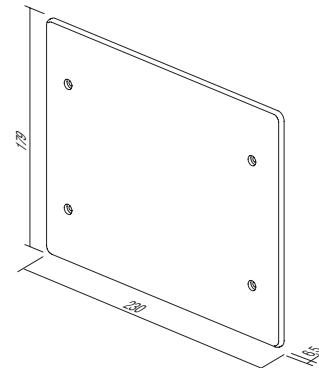




HM30

DOZA PRAVOKOTNA ZA VOTLE STENE VM3

- velikost 3M, globina 49mm
- vgradnja v izvrtino 2xØ68/45mm
- 850°C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX HOLLOW WALL VM3

- size 3M, depth 49mm
- cutting hole 2xØ68/45mm
- 850°C, 400V~
- in accordance with IEC 60670-1
- halogen free




HM40

DOZA PRAVOKOTNA ZA VOTLE STENE VM4

- velikost 4M, globina 49mm
- vgradnja v izvrtino 2xØ68/70mm
- 850°C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX HOLLOW WALL VM4

- size 4M, depth 49mm
- cutting hole 2xØ68/70mm
- 850°C, 400V~
- in accordance with IEC 60670-1
- halogen free




HM70

DOZA PRAVOKOTNA ZA VOTLE STENE VM7

- velikost 7M, globina 49mm
- vgradnja v izvrtino 2xØ68/120mm
- 850°C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX HOLLOW WALL VM7

- size 7M, depth 49mm
- cutting hole 2xØ68/120mm
- 850°C, 400V~
- in accordance with IEC 60670-1
- halogen free




HM72

DOZA PRAVOKOTNA ZA VOTLE STENE VM72

- velikost 2x7M, globina 63mm
- 850°C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX HOLLOW WALL VM72

- size 2x7M, depth 63mm
- 850°C, 400V~
- in accordance with IEC 60670-1
- halogen free

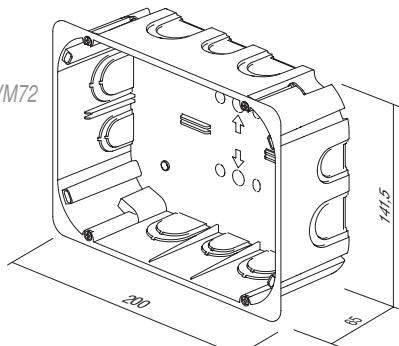

RECTANGULAR BOXES




BM30

DOZA PRAVOKOTNA ZA BETON BM3

- velikost 3M, globina 60mm
- 650 °C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX CONCRETE BM3

- size 3M, depth 60mm
- 650 °C, 400V~
- in accordance with IEC 60670-1
- halogen free




BM40

DOZA PRAVOKOTNA ZA BETON BM4

- velikost 4M, globina 60mm
- 650 °C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX CONCRETE BM4

- size 4M, depth 60mm
- 650 °C, 400V~
- in accordance with IEC 60670-1
- halogen free

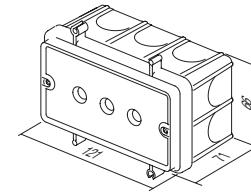


BM70

DOZA PRAVOKOTNA ZA BETON BM7

- velikost 7M, globina 60mm
- 650 °C, 400V~
- ustreza IEC 60670-1
- "halogen free"

RECTANGULAR BOX CONCRETE BM7

- size 7M, depth 60mm
- 650 °C, 400V~
- in accordance with IEC 60670-1
- halogen free




BM80

PRITRDILNI ČLEN DOZ BM

- za hitro pritrditev pravokotnih doz BM na armaturno mrežo
- primerno za palice do premera Ø8mm

FIXING COMBI-CLIP BM

- for fast fixation of BM rectangular boxes on reinforcing bar
- suitable for bar diameter up to Ø8mm




BM82

DISTANČNI PROFIL ZA DOZE

- za utrditev doz BM skupaj z nosilcem doze za beton v nasprotno steno
- dolžina l=1m, premer Ø20mm

DISTANCE PROFIL FOR BOXES BM

- to support boxes BM with counter box support on opposite wall
- length l=1m, diameter Ø20mm






opeka / brick



votle stene / hollow walls




beton / concrete

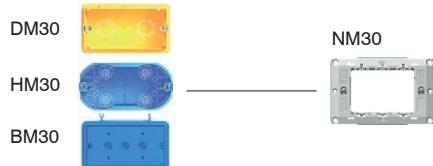


3M




4M

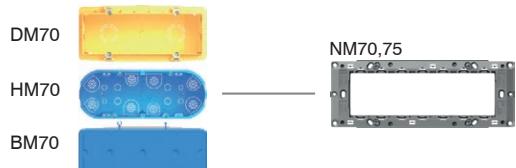

7M

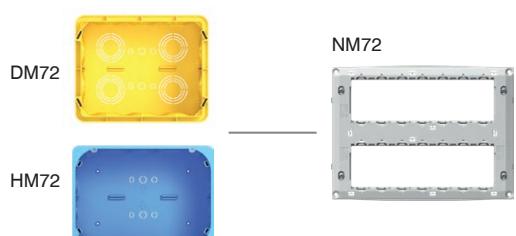


2x7M




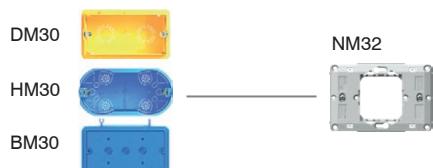


2/3M

RECTANGULAR BOXES

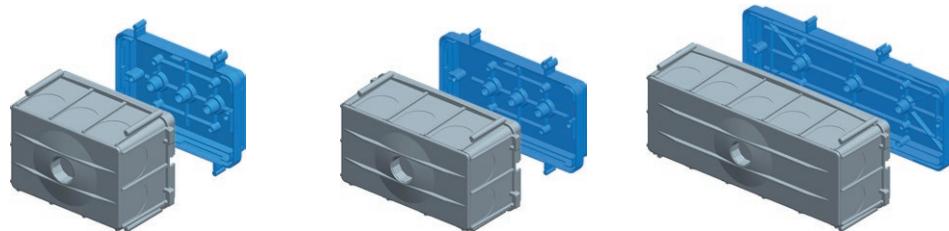

navodila za montažo /
assembly instructions

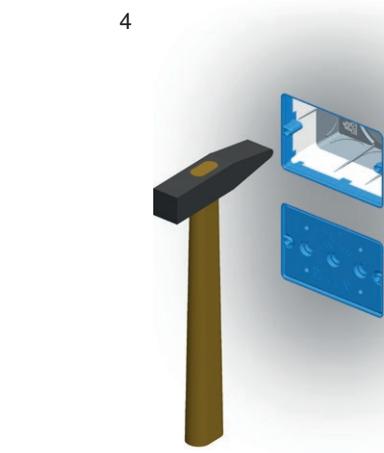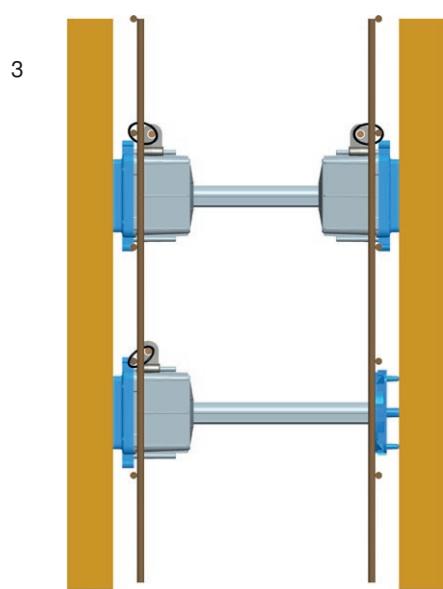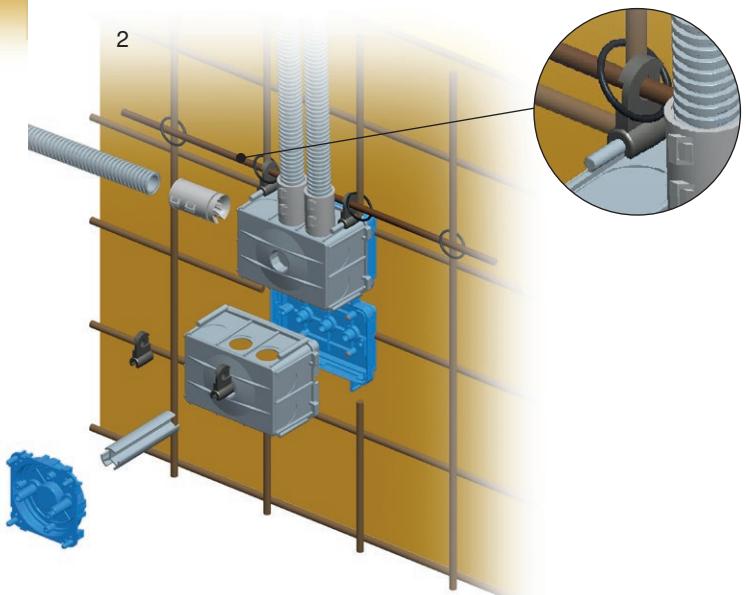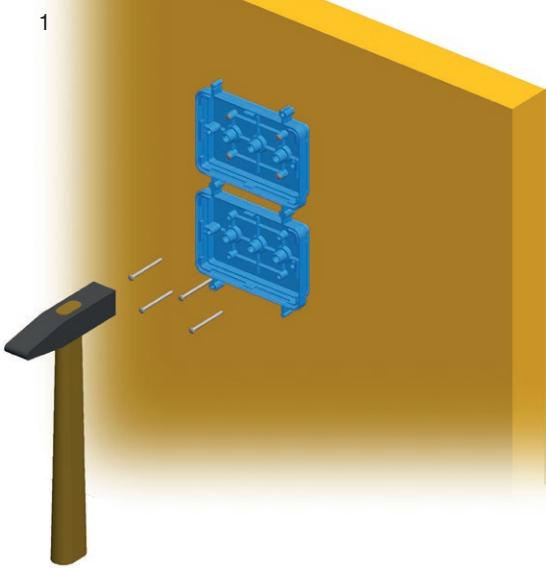

RAZVODNA DOZA OKROGLA ZA ZID DSM78




DW10

- Ø78, globina 40mm
- 650°C, 500V~
- ustreza IEC 60670-1 in IEC 60670-22
- "halogen free"

CONNECTION ROUND BOX BRICK DSM78

- Ø78, depth 40mm
- 650°C, 500V~
- in accordance with IEC 60670-1 and IEC 60670-22
- halogen free



RAZVODNA DOZA OKROGLA ZA VOTLE STENE SM78x45




HW10

- Ø78, globina 45mm
- vgradnja v izvrtino Ø80
- 850°C, 400V~
- ustreza IEC 60670-1 in IEC 60670-22
- montaža s krempeljci
- "halogen free"

CONNECTION ROUND BOX HOLLOW WALL SM78x45

- Ø78, depth 45mm
- cutting hole Ø80
- 850°C, 400V~
- in accordance with IEC 60670-1 and IEC 60670-22
- mounting with claws
- halogen free



POKROV DOZE DEKORATIVNI SM78




DE23

- dekorativni pokrov doze Ø78
- ustreza IEC 60670-1 and IEC 60670-22
- "halogen free"

BOX COVER DECORATIVE SM78

- decorative cover for boxes Ø78
- in accordance with IEC 60670-1 and IEC 60670-22
- halogen free



POKROV DOZE ZAŠČITNI 78




DE24

- zaščitni pokrov doze Ø78
- ustreza IEC 60670-1 in IEC 60670-22
- "halogen free"

BOX COVER PROTECTIVE 78

- protective cover for box Ø78
- in accordance with IEC 60670-1 and IEC 60670-22
- halogen free



RAZVODNA DOZA KVADRATNA ZA VOTLE STENE SM105x105




HW20

- 105x105mm, globina 50mm
- vgradnja v izvrtino s priloženo šablono
- 850°C, 400V~
- ustreza IEC 60670-1 in IEC 60670-22
- montaža s krempeljci
- "halogen free"

CONNECTION SQUARE BOX HOLLOW WALL SM105x105

- size 105x105mm, depth 50mm
- cutting hole according to attached template
- 850°C, 400V~
- in accordance with IEC 60670-1 and IEC 60670-22
- mounting with claws
- halogen free

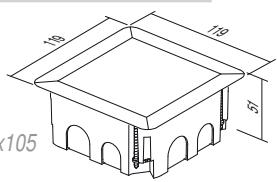



UW10


tip type	naziv description	tehnični opis technical data	velikost size	barva colour
UW10	ENOREDNE SPONKE ZAPRTE 1 ROW TERMINAL BLOCKS	2x2.5mm ²	10P	<input checked="" type="checkbox"/> TS prozorna transparent
UW11	ENOREDNE SPONKE ZAPRTE 1 ROW TERMINAL BLOCKS	2x4mm ²	10P	<input checked="" type="checkbox"/> CO barvne colour
UW12	ENOREDNE SPONKE ZAPRTE 1 ROW TERMINAL BLOCKS	2x6mm ²	10P	<input type="checkbox"/> WH bela white
.	.	.	.	<input type="checkbox"/> GY siva grey
.	.	.	.	
.	.	.	.	

ENOREDNE SPONKE ZAPRTE



- 450V~; 2x2.5mm² ÷ 2x6mm²
 - termoplast PC, prozorne
 - število polov: 10
- 1 ROW TERMINAL BLOCKS CLOSED**
- 450V~; 2x2.5mm² ÷ 2x6mm²
 - thermoplast PC, transparent
 - number of poles: 10

UW10TS	(NS12)	2x2.5mm ²	10P
UW11TS	(NS12)	2x4mm ²	10P
UW12TS	(NS12)	2x6mm ²	10P




ENOREDNE SPONKE




- 450V~; 2x2.5mm² ÷ 2x6mm²
 - termoplast PA
 - na voljo v različnih barvah
 - število polov: 12
- 1 ROW TERMINAL BLOCKS**
- 450V~; 2x2.5mm² ÷ 2x6mm²
 - thermoplast PA
 - available in different colours
 - number of poles: 12


UW15CO	(NS12)	2x2.5mm ²	12P
UW16CO	(NS12)	2x4mm ²	12P
UW17CO	(NS12)	2x6mm ²	12P

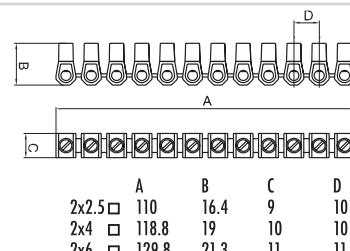

DVOREDNE SPONKE PP



- 450 V~; 1 mm² ÷ 16 mm²
 - termoplast polipropilen PP, bele
 - za uporabo do 80 °C
 - število polov: 12
- 2 ROW TERMINAL BLOCKS PP**
- 450V~; 1mm² ÷ 16mm²
 - thermoplast polypropylene PP, white
 - for temperatures up to 80°C
 - number of poles: 12

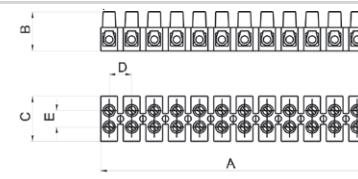

	A	B	C	D	E
UW29WHPP	1.0-4.0mm ²	24 A	450 V		94,9
UW30WHPP	1.5-6.0mm ²	32 A	450 V		116,5
UW31WHPP	2.5-10mm ²	41 A	450 V		133,8
UW32WHPP	4-16mm ²	76 A	450 V		174,5
				A	20,7
				B	25
				C	15
				D	11
				E	


DVOREDNE SPONKE PA



- 450 V~; 1 mm² ÷ 16 mm²
- termoplast poliamid PA, bele
- za uporabo do 110°C
- število polov: 12

2 ROW TERMINAL BLOCKS PA

- 450V~; 1mm² ÷ 16mm²
- thermoplast polyamide PA, white
- for temperatures up to 110°C
- number of poles: 12

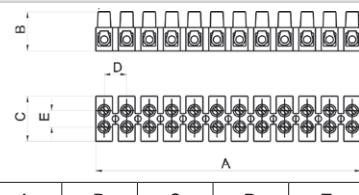


UW27WHPA	2.5-10mm ²	41 A	450 V		132,8	17,3	22,2	11,5	10
UW28WHPA	4-16mm ²	76 A	450 V		173,9	20,8	25,2	15	11

A	B	C	D	E
132,8	17,3	22,2	11,5	10
173,9	20,8	25,2	15	11

BREZVIJAČNE SPONKE



- 24A 450V~, termoplast PA, sive
- število polov: 3÷8
- brezvijačni kontakti 0.5 ÷ 1.5mm², za trde žice
- ustreza EN 60998-1



PLUG-IN WIRE CONNECTORS

- 24A 450V~, thermoplast PA, grey
- number of poles: 3÷8
- plug-in contacts 0.5÷1.5mm², for rigide wires
- in accordance with EN 60998-1


UW40GY	PC153	1.5mm ²	3P	3P	A 12	B 18	C 9
UW41GY	PC155	1.5mm ²	5P	5P	17	18	9
UW42GY	PC158	1.5mm ²	8P	8P	26	18	9

A	B	C
12	18	9
17	18	9
26	18	9

BREZVIJAČNE SPONKE



- 24A 450V~, termoplast PA, sive
- število polov: 3÷5
- brezvijačni kontakti 1.5 ÷ 2.5mm², za trde žice
- ustreza EN 60998-1



PLUG-IN WIRE CONNECTORS

- 24A 450V~, thermoplast PA, grey
- number of poles: 3÷5
- plug-in contacts 1.5÷2.5mm², for rigide wires
- in accordance with EN 60998-1


UW45GY	PC253	2.5mm ²	3P	3P	A 14	B 19	C 9
UW46GY	PC254	2.5mm ²	4P	4P	17	19	9
UW47GY	PC255	2.5mm ²	5P	5P	21	19	9

A	B	C
14	19	9
17	19	9
21	19	9

BREZVIJAČNE SPONKE



- 24A 450V~, termoplast PA, sive
- število polov: 2 (trda žica)+1 (mehka žica)
- brezvijačni kontakti 1.5 ÷ 2.5mm²
- ustreza EN 60998-1



PLUG-IN WIRE CONNECTOR

- 24A 450V~, thermoplast PA, grey
- number of poles: 2 (rigide wire)+1 (soft wire)
- plug-in contacts 1.5÷2.5mm²
- in accordance with EN 60998-1

UW50WH	PC302	2.5mm ²	2/1P
--------	-------	--------------------	------



MODUL



158



159



161




166



DISTRIBUCIJA



TEM

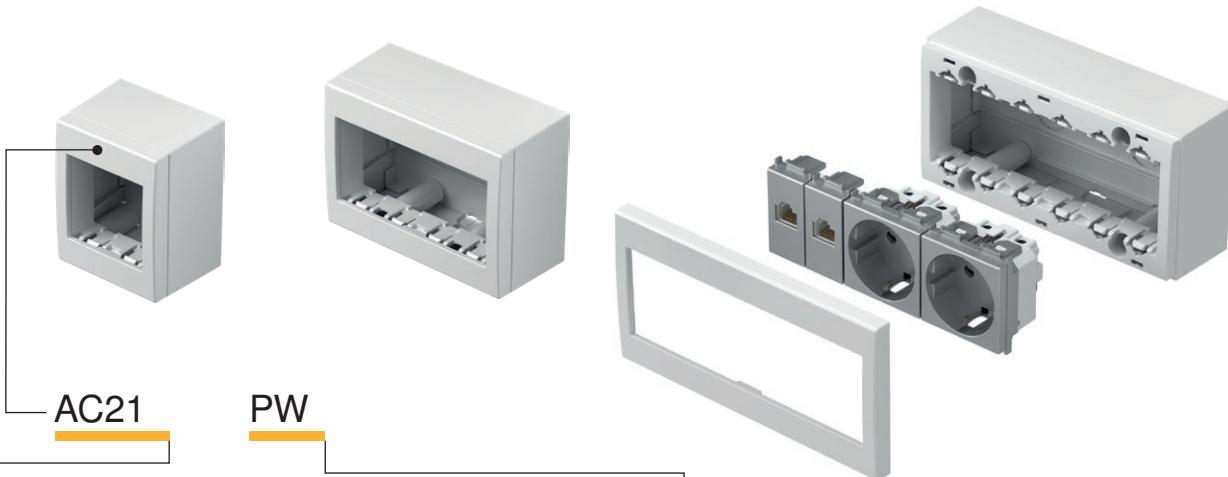

tip type	naziv description	tehnični opis technical data	velikost size	barva colour
AC11	OHIŠJE NO CUBO Z DNOM SURFACE MOUNT BOX WITH BACK SIDE COVER	IP20	1M	<input type="checkbox"/> PW bela-sijaj polar white <input type="checkbox"/> ES srebrna-mat elox silver <input type="checkbox"/> IW bež-sijaj ivory white <input type="checkbox"/> AT antracit anthracite
AC21	OHIŠJE NO CUBO Z DNOM SURFACE MOUNT BOX WITH BACK SIDE COVER	IP20	2M	
AC41	OHIŠJE NO CUBO Z DNOM SURFACE MOUNT BOX WITH BACK SIDE COVER	IP20	4M	

OHIŠJE NO CUBO Z DNOM IP20 1M



- AC11PW
 AC11ES
 AC11IW
 AC11AT

- ohišje IP20 1M
- za nadomestno pririditev elementov
- primeren za stikala SM
- ustreza EN 60669-1
BOX NO CUBO WITH BACK SIDE COVER IP20 1M
- box IP20 1M
- for surface mounting of elements
- suitable to SM switches
- in accordance with EN 60669-1



OHIŠJE NO CUBO Z DNOM IP20 2M



- AC21PW
 AC21ES
 AC21IW
 AC21AT

- ohišje IP20 2M
- za nadomestno pririditev elementov
- ustreza EN 60669-1, EN60884-1
BOX NO CUBO WITH BACK SIDE COVER IP20 2M
- box IP20 2M
- for surface mounting of elements
- in accordance with EN 60669-1, EN60884-1



OHIŠJE NO CUBO Z DNOM IP20 4M



- AC41PW
 AC41ES
 AC41IW
 AC41AT

- ohišje IP20 4M
- za nadomestno pririditev elementov
- ustreza EN 60669-1, EN60884-1
BOX NO CUBO WITH BACK SIDE COVER IP20 4M
- box IP20 4M
- for surface mounting of elements
- in accordance with EN 60669-1, EN60884-1







OHIŠJE NO CUBO Z DNOM IP20 6M



- AC61PW
 AC61ES
 AC61IW
 AC61AT

- ohišje IP20 6M
- za nadomestno pririditev elementov
- ustreza EN 60669-1, EN60884-1
BOX NO CUBO WITH BACK SIDE COVER IP20 6M
- box IP20 6M
- for surface mounting of elements
- in accordance with EN 60669-1, EN60884-1



BOXES CUBO IP55 AQ



AQ30



PW



tip type	naziv description	tehnični opis technical data	velikost size	barva colour
AQ20	OHIŠJE NO CUBO OUTDOOR SURFACE MOUNT BOX	IP55	2M	<input type="checkbox"/> PW bela sijaj polar white
AQ22	OHIŠJE NO CUBO OUTDOOR SURFACE MOUNT BOX	IP55	2x2M	<input checked="" type="checkbox"/> GY siva grey
AQ30	OHIŠJE NO CUBO OUTDOOR SURFACE MOUNT BOX	IP55	3M	
AQ31	OHIŠJE PO CUBO OUTDOOR SURFACE MOUNT BOX	IP55	3M	

OHIŠJE NO CUBO IP55 2M



AQ20PW
 AQ20GY

- ohišje IP55 2M
- za nadomestno pritrditev
- IP55 za vgradnjo v vlažne prostore
- ustreza CEI 23-48, EN 60670



BOX NO CUBO IP55 2M

- box IP55 2M
- for surface mounting
- IP55 for usage in humid areas
- in accordance with CEI 23-48, EN 60670




AQ22PW
 AQ22GY

- ohišje IP55 2x2M
- za nadomestno pritrditev
- IP55 za vgradnjo v vlažne prostore
- ustreza CEI 23-48, EN 60670



BOX NO CUBO IP55 2x2M

- box IP55 2x2M
- for surface mounting
- IP55 for usage in humid areas
- in accordance with CEI 23-48, EN 60670



AQ30PW
 AQ30GY

OHIŠJE NO CUBO IP55 3M

- ohišje IP55 3M
- za nadomestno pritrditev
- IP55 za vgradnjo v vlažne prostore
- ustreza CEI 23-48, EN 60670



BOX NO CUBO IP55 3M

- box IP55 3M
- for surface mounting
- IP55 for usage in humid areas
- in accordance with CEI 23-48, EN 60670


OHIŠJE PO CUBO IP55 2M

AQ21PW
 AQ21AT

- ohišje IP55 2M
- lahko se kombinira z vsemi funkcijskimi elementi Modul
- za podometno pritrpitev
- IP55 za vgradnjo v vlažne prostore
- ustreza CEI 23-48, EN 60670

BOX PO CUBO IP55 2M

- box IP55 2M
- can be combined with all Modul functional elements
- for flush mounting
- IP55 for usage in humid areas
- in accordance with CEI 23-48, EN 60670


**OHIŠJE PO CUBO IP55 3M**

AQ31PW
 AQ31GY


- ohišje IP55 3M
- za podometno pritrpitev
- IP55 za vgradnjo v vlažne prostore
- ustreza CEI 23-48, EN 60670

BOX PO CUBO IP55 3M


- box IP55 3M
- for flush mounting
- IP55 for usage in humid areas
- in accordance with CEI 23-48, EN 60670




AQ20

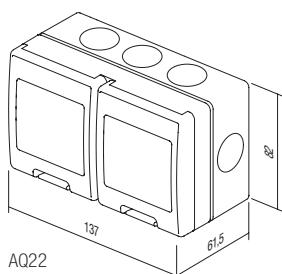


AQ22




AQ30



AQ31



AQ21

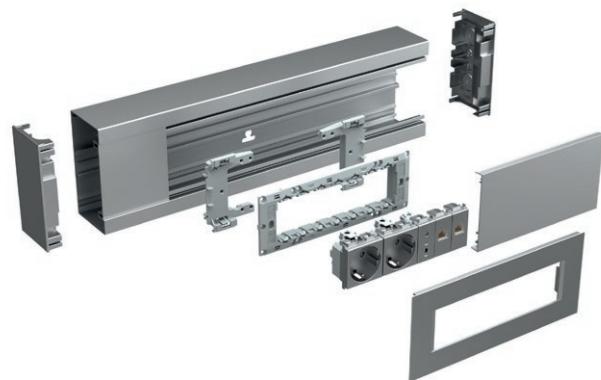

RT20

ES

tip type	naziv description	velikost size	barva colour
RT10	ADAPTER MA 92 ADAPTER MA 92	/	<input checked="" type="checkbox"/> ES srebrna-mat elox silver-mat
RT12	OKVIR MA 92 COVER PLATE MA 92	2/3M	<input type="checkbox"/> PW bela-mat (RAL 9016) white-mat
RT14	OKVIR MA 92 COVER PLATE MA 92	4M	

ADAPTER MA 92

RT10

- adapter za pritrditev nosilcev 2/3M, 4M ali 7M Modul na kanal MA brez doze
- vsak nosilec potrebuje dva adapterja
- ustreza EN 50085-1


ADAPTER MA 92

- adapter for fixing mounting frames 2/3M, 4M or 7M on MA trunking without box
- each mounting frame needs two adapters
- in accordance with EN 50085-1

**OKVIR MA 92 2/3M**


- RT12ES
 RT12PW

- dekorativni okvir MA 2/3M
 - ustreza EN 50085-1
- COVER PLATE MA 92 2/3M**
- decorative cover plate MA 2/3M
 - in accordance with EN 50085-1

**OKVIR MA 92 4M**


- RT14ES
 RT14PW

- dekorativni okvir MA 4M
 - ustreza EN 50085-1
- COVER PLATE MA 92 4M**
- decorative cover plate MA 4M
 - in accordance with EN 50085-1

**OKVIR MA 92 7M**

- RT17ES
 RT17PW

- dekorativni okvir MA 7M
 - ustreza EN 50085-1
- COVER PLATE MA 92 7M**
- decorative cover plate MA 7M
 - in accordance with EN 50085-1



P A R A P E T N I K A N A L I A L U M I N I J S K I




RT20ES
 RT20PW

OSNOVA KANALA MA 130x65

- osnova kanala iz ekstrudiranega aluminija
- višina 130mm, dolžina 2m
- DIN letev 35mm na dnu
- ustreza EN 50085-1

TRUNKING BASE MA 130x65

- trunking base from extruded aluminium
- height 130mm, lenght 2m
- DIN - rail 35mm shape on bottom
- in accordance with EN 50085-1




RT21ES
 RT21PW

OSNOVA KANALA MA 165x65

- osnova kanala iz ekstrudiranega aluminija
- višina 165mm, dolžina 2m
- DIN letev 35mm na dnu
- ustreza EN 50085-1

TRUNKING BASE MA 165x65

- trunking base from extruded aluminium
- height 165mm, lenght 2m
- DIN - rail 35mm shape on bottom
- in accordance with EN 50085-1




RT25ES
 RT25PW

POKROV KANALA MA 92

- pokrov kanala iz ekstrudiranega aluminija
- višina 92mm, dolžina 2m
- ustreza EN 50085-1

FRONT COVER MA 92

- front cover from extruded aluminium
- height 92mm, lenght 2m
- in accordance with EN 50085-1




RT30

PREGRADA MA 43

- pregrada kanala iz ekstrudiranega polimera
- globina 43mm, dolžina 2m
- ustreza EN 50085-1

CABLE SHELF MA 43

- cable shelf from extruded polymer
- depth 43mm, lenght 2m
- in accordance with EN 50085-1




RT31

PREGRADA MA 43 AL

- pregrada kanala iz ekstrudiranega aluminija
- globina 43mm, dolžina 2m
- ustreza EN 50085-1

CABLE SHELF MA 43 AL

- cable shelf from extruded aluminium
- depth 43mm, lenght 2m
- in accordance with EN 50085-1




RT32

PREGRADA MA 43 AL DVOJNA

- dvojna pregrada kanala iz ekstrudiranega aluminija
- globina 43mm, dolžina 2m
- ustreza EN 50085-1

CABLE SHELF MA 43 AL DOUBLE

- double cable shelf from extruded aluminium
- depth 43mm, lenght 2m
- in accordance with EN 50085-1






RT35ES
 RT35PW

KONČNI ELEMENT MA 130x65

- končni element iz polimera
 - višina 130mm
 - ustreza EN 50085-1
- STOP END MA 130x65**
- stop end element from polymer
 - height 130mm
 - in accordance with EN 50085-1



RT36ES
 RT36PW

KONČNI ELEMENT MA 165x65

- končni element iz kovine
- višina 165mm
- ustreza EN 50085-1

STOP END MA 165x65

- stop end element from metal
- height 165mm
- in accordance with EN 50085-1




RT38

SET RAVNI VEZNI ELEMENT MA 65

- vezni element iz polimera
- set vsebuje 2 vezna elementa in vijake
- ustreza EN 50085-1

SET JOINING PIECE MA 65

- joining piece from polymer
- set contains two pieces and screws
- in accordance with EN 50085-1



RT40ES
 RT40PW

UNIVERZALNI KOT MA 130x65

- univerzalni kotni element
- višina 130mm
- ustreza EN 50085-1

UNIVERSAL CORNER MA 130x65

- universal corner element
- height 130mm
- in accordance with EN 50085-1



RT41ES
 RT41PW

UNIVERZALNI KOT MA 165x65

- univerzalni kotni element
- višina 165mm
- ustreza EN 50085-1

UNIVERSAL CORNER MA 165x65

- universal corner element
- height 165mm
- in accordance with EN 50085-1




RT42

OZEMLJITVENA SPONKA MA 2x A6.3

- ozemljitvena sponka za ozemljitev osnove
- in pokrova kanala
- ustreza EN 50085-1

EARTHING PIECE MA 2x A6.3

- earthing piece for earthing of trunking base
- and front cover
- in accordance with EN 50085-1




RT43ES
 RT43PW

L KOTNI ELEMENT MA 130x65 / 130

- univerzalni L kotni element iz aluminija
- višina 130mm, dolžina 400mm
- vezava na MA 130x65
- ustreza EN 50085-1

L-BEND MA 130x65 / 130

- universal L bend element from aluminium
- height 130mm, length 400mm
- connection on MA 130x65
- in accordance with EN 50085-1



P A R A P E T N I K A N A L I A L U M I N I J S K I




RT44ES
 RT44PW

L KOTNI ELEMENT MA 165x65 / 130

- univerzalni L kotni element iz aluminija
- višina 165mm, dolžina 400mm
- vezava na MA 130x65
- ustreza EN 50085-1

L-BEND MA 165x65 / 130

- universal L bend element from aluminium
- height 165mm, lenght 400mm
- connection on MA 130x65
- in accordance with EN 50085-1




RT47ES
 RT47PW

L KOTNI ELEMENT MA 165x65 / 165

- univerzalni L kotni element iz aluminija
- višina 165mm, dolžina 400mm
- vezava na MA 165x65
- ustreza EN 50085-1

L-BEND MA 165x65 / 165

- universal L bend element from aluminium
- height 165mm, lenght 400mm
- connection on MA 165x65
- in accordance with EN 50085-1




RT45ES
 RT45PW

T ELEMENT MA 130x65 / 130

- univerzalni T kotni element iz aluminija
- višina 130mm, dolžina 400mm
- vezava na MA 130x65
- ustreza EN 50085-1

T-BEND MA 130x65 / 130

- universal T bend element from aluminium
- height 130mm, lenght 400mm
- connection on MA 130x65
- in accordance with EN 50085-1




RT46ES
 RT46PW

T ELEMENT MA 165x65 / 130

- univerzalni T kotni element iz aluminija
- višina 165mm, dolžina 400mm
- vezava na MA 130x65
- ustreza EN 50085-1

T-BEND MA 165x65 / 130

- universal T bend element from aluminium
- height 165mm, lenght 400mm
- connection on MA 130x65
- in accordance with EN 50085-1




RT48ES
 RT48PW

T ELEMENT MA 165x65 / 165


- univerzalni T kotni element iz aluminija
- višina 165mm, dolžina 400mm
- vezava na MA 165x65
- ustreza EN 50085-1

T-BEND MA 165x65 / 165

- universal T bend element from aluminium
- height 165mm, lenght 400mm
- connection on MA 165x65
- in accordance with EN 50085-1




MA je modularni sistem za velikosti:
2M, 4M, 7M



Modul vsebuje tudi elemente pripravljene za hitro montažo



Adapter MA omogoča natančno pozicioniranje na rob kanala



Montaža brez doze pomeni več prostora za kable,
DIN letev oblika EN-60715

MA trunking is based on modular system making 2M, 4M or 7M combinations of elements

In Modul we provide special elements for quick installation

With Adapter MA exact positioning without extra effort is provided

Mounted without box means more space for cables,
DIN-rail base shape EN-60715



NOSILEC STEBRIČKA MA ENOJNI 130x65

- RT50ES
 RT50PW

- nosilec za pritrdirtev kanala MA130 v tla in/ali v strop prostora
- ustreza EN 50085-1



FIXING PLATE MA SINGLE 130x65

- fixing plate for fixing trunking base MA130 on the floor
and/or on the ceiling
- in accordance with EN 50085-1



NOSILEC STEBRIČKA MA DVOJNI 130x65

- RT51ES
 RT51PW

- nosilec za pritrdirtev dveh kanalov MA130 v tla
in/ali v strop prostora
- ustreza EN 50085-1

FIXING PLATE MA DOUBLE 130x65

- fixing plate for fixing two trunking bases MA130 on the
floor and/or on the ceiling
- in accordance with EN 50085-1




STEBRIČEK MA 130x65x500

- RT52ES
 RT52PW

- instalacijski stebriček MA
- višina 500mm
- nosilec 7M vgrajen
- ustreza EN 50085-1

SERVICE POST MA 130x65x500

- service post MA
- height 500mm
- mounting frame 7M included
- in accordance with EN 50085-1



- RT53ES
 RT53PW

STEBRIČEK MA DVOJNI 130x130x500

- instalacijski stebriček MA dvojni
- višina 500mm
- nosilca 7M vgrajena
- ustreza EN 50085-1

SERVICE POST MA DOUBLE 130x130x500



- service post MA double
- height 500mm
- mounting frames 7M included
- in accordance with EN 50085-1

Presek vodnika / Cable intersection mm ²	Uporabni presek kablov / Cable cross-section (mm ²)				
	1 vodnik / 1 wire	2 vodnika / 2 wires	3 vodniki / 3 wires	4 vodniki / 4 wires	5 vodnikov / 5 wires
1,5	44	111	121	144	169
2,5	49	133	157	169	211
4	58	169	183	211	256
6	68	196	225	256	307


Kapaciteta kanala / Trunk capacity				
kanal / Trunk	MA 130x65 prazen / empty	MA 130x65 z Modul opremo / with Modul switches and sockets	MA 165x65 prazen / empty	MA 130x65 z Modul opremo / with Modul switches and sockets
kapaciteta capacity	7600 mm ²	5500 mm ²	9900 mm ²	7800 mm ²
max ø	54 mm	2x42 mm	54 mm	2x42 mm



tip type	naziv description	tehnični opis technical data
RB50	VGRADNO OHIŠJE TALNE DOZE FLOOR BOX BASE	4M
RB65S1	POKROV TALNE DOZE FLOOR DISTRIBUTION BOX COVER	4M
RB66	VLOŽEK TALNE DOZE INSERT FOR FLOOR DISTRIBUTION BOX	4M
.	.	.
.	.	.
.	.	.

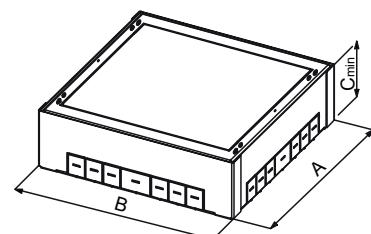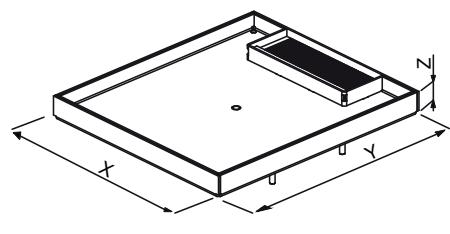

	RB65S1	RB66S1	RB67S2	RB68S2		RB50	RB51	RB52	RB53
X	177	178	265	516,5		208,5	273	273	273
Y	200,5	265	265	265		182	182,5	269,5	521
Z	17,5	17,5	17,5	17,5		83	83	83	83

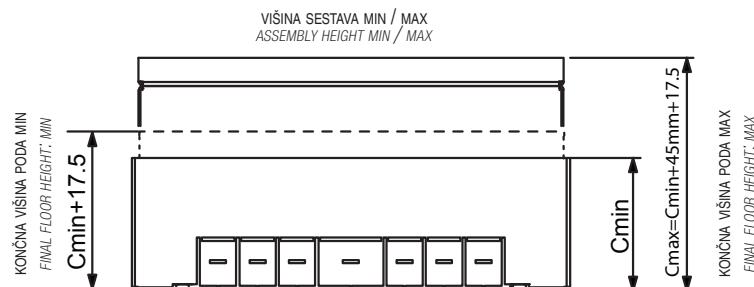

FLOOR BOXES M T

		VGRADNO OHIŠJE TALNE DOZE 4M
	RB50	<ul style="list-style-type: none"> - vgradno ohišje 4M - kovinsko, cinkano - za vgradnjo v tlak ali dvojni pod - vgradne mere 208,5 x 182 mm, globina min 83 mm - nastavljiva višina 83–128 mm - ustreza EN 5005-1 in EN 50085-2-2 <p>FLOOR BOX BASE 4M</p> <ul style="list-style-type: none"> - floor box base 4M - metal, galvanized - for installation in a floor or double floor - mounting dimensions 208.5x182mm, min. depth 83mm - adjustable height 83-128mm - in accordance with EN 5005-1 and EN 50085-2-2
		VLOŽEK TALNE DOZE 4M
	RB60	<ul style="list-style-type: none"> - vložek talne doze 4M - kovinski, barva bela RAL 9006 - nosilec MODUL 4M vgrajen - ustreza EN 5005-1 in EN 50085-2-2 <p>INSERT FOR FLOOR DISTRIBUTION BOX 4M</p> <ul style="list-style-type: none"> - insert for floor box 4M - metal, colour white RAL 9006 - mounting frame MODUL 4M included - in accordance with EN 5005-1 and EN 50085-2-2
		POKROV TALNE DOZE 4M
	RB65S1	<ul style="list-style-type: none"> - pokrov doze 4M - kovinski, cinkan - vgradne mere 200,5 x 177 mm, globina 17,5 mm - debelina talne obloge pokrova do 11,5 mm - ustreza EN 5005-1 in EN 50085-2-2 <p>FLOOR DISTRIBUTION BOX COVER 4M</p> <ul style="list-style-type: none"> - floor box cover 4M - metal, galvanized - mounting dimensions 200.5x177mm, depth 17.5mm - floor thickness up to 11.5mm - in accordance with EN 5005-1 and EN 50085-2-2
		VGRADNO OHIŠJE TALNE DOZE 7M
	RB51	<ul style="list-style-type: none"> - vgradno ohišje 7M - kovinsko, cinkano - za vgradnjo v tlak ali dvojni pod - vgradne mere 273 x 182,5 mm, globina min 83 mm - nastavljiva višina 83–128 mm - ustreza EN 5005-1 in EN 50085-2-2 <p>FLOOR BOX BASE 7M</p> <ul style="list-style-type: none"> - floor box base 7M - metal, galvanized - for installation in a floor or double floor - mounting dimensions 273x182.5mm, min. depth 83mm - adjustable height 83-128mm - in accordance with EN 5005-1 and EN 50085-2-2
		VLOŽEK TALNE DOZE 7M
	RB61	<ul style="list-style-type: none"> - vložek talne doze 7M - kovinski, barva bela RAL 9006 - nosilec MODUL 7M vgrajen - ustreza EN 5005-1 in EN 50085-2-2 <p>INSERT FOR FLOOR DISTRIBUTION BOX 7M</p> <ul style="list-style-type: none"> - insert for floor box 7M - metal, colour white RAL 9006 - mounting frame MODUL 7M included - in accordance with EN 5005-1 and EN 50085-2-2
		POKROV TALNE DOZE 7M
	RB66S1	<ul style="list-style-type: none"> - pokrov doze 7M - kovinski, cinkan - vgradne mere 265 x 178 mm, globina 17,5 mm - debelina talne obloge pokrova do 11,5 mm - ustreza EN 5005-1 in EN 50085-2-2 <p>FLOOR DISTRIBUTION BOX COVER 7M</p> <ul style="list-style-type: none"> - floor box cover 7M - metal, galvanized - mounting dimensions 265x178mm, depth 17.5mm - floor thickness up to 11.5mm - in accordance with EN 5005-1 and EN 50085-2-2

VGRADNO OHIŠJE TALNE DOZE 2X7M

RB52

- vgradno ohišje 2 x 7M
- kovinsko, cinkano
- za vgradnjo v tlak ali dvojni pod
- vgradne mere 273 x 269,5 mm, globina min 83 mm
- nastavljiva višina 83-128 mm
- ustreza EN 5005-1 in EN 50085-2-2

FLOOR BOX BASE 2X7M

- floor box base 2x7M
- metal, galvanized
- for installation in a floor or double floor
- mounting dimensions 273x269.5mm, min. depth 83mm
- adjustable height 83-128mm
- in accordance with EN 5005-1 and EN 50085-2-2

VLOŽEK TALNE DOZE 2X7M

RB62

- vložek talne doze 2 x 7M
- kovinski, barva bela RAL 9006
- nosilca MODUL 2 x 7M vgrajena
- ustreza EN 5005-1 in EN 50085-2-2

INSERT FOR FLOOR DISTRIBUTION BOX 2X7M

- insert for floor box 2x7M
- metal, colour white RAL 9006
- mounting frames MODUL 2x7M included
- in accordance with EN 5005-1 and EN 50085-2-2


POKROV TALNE DOZE 2X7M

RB67S2

- pokrov doze 2 X 7M
- kovinski, cinkan
- vgradne mere 265 x 265 mm, globina 17,5 mm
- debelina talne obloge pokrova do 11,5 mm
- ustreza EN 5005-1 in EN 50085-2-2

FLOOR DISTRIBUTION BOX COVER 2X7M

- floor box cover 2x7M
- metal, galvanized
- mounting dimensions 265x265mm, depth 17.5mm
- floor thickness up to 11.5mm
- in accordance with EN 5005-1 and EN 50085-2-2

VGRADNO OHIŠJE TALNE DOZE 4X7M

RB53

- vgradno ohišje 4 x 7M
- kovinsko, cinkano
- za vgradnjo v tlak ali dvojni pod
- vgradne mere 273 x 521 mm, globina min 83 mm
- nastavljiva višina 83-128 mm
- ustreza EN 5005-1 in EN 50085-2-2

FLOOR BOX BASE 4X7M

- floor box base 4X7M
- metal, galvanized
- for installation in a floor or double floor
- mounting dimensions 273x521mm, min. depth 83mm
- adjustable height 83-128mm
- in accordance with EN 5005-1 and EN 50085-2-2

VLOŽEK TALNE DOZE 2X7M

RB62

- vložek talne doze 2 x 7M
- kovinski, barva bela RAL 9006
- nosilca MODUL 2 x 7M vgrajena
- ustreza EN 5005-1 in EN 50085-2-2

INSERT FOR FLOOR DISTRIBUTION BOX 2X7M

- insert for floor box 2x7M
- metal, colour white RAL 9006
- mounting frames MODUL 2x7M included
- in accordance with EN 5005-1 and EN 50085-2-2

POKROV TALNE DOZE 4X7M

RB68S2

- pokrov doze 4 X 7M
- kovinski, cinkan
- vgradne mere 265 x 516,5 mm, globina 17,5 mm
- debelina talne obloge pokrova do 11,5 mm
- ustreza EN 5005-1 in EN 50085-2-2

FLOOR DISTRIBUTION BOX COVER 4X7M

- floor box cover 4x7M
- metal, galvanized
- mounting dimensions 265x516.5mm, depth 17.5mm
- floor thickness up to 11.5mm
- in accordance with EN 5005-1 and EN 50085-2-2



FLOOR BOXES M T



RB55S1

tip type	naziv description	tehnični opis technical data
RB55S1	TALNA DOZA ZA DVOJNA TLA S POKROVOM FLOOR BOX WITH COVER FOR DOUBLE FLOORS	4M
RB60	VLOŽEK TALNE DOZE INSERT FOR FLOOR DISTRIBUTION BOX	4M

	RB55S1	RB56S1	RB57S2	RB58S2
A	200,5	265	265	265
B	177	178	265	516,5
C min	100	100	100	100

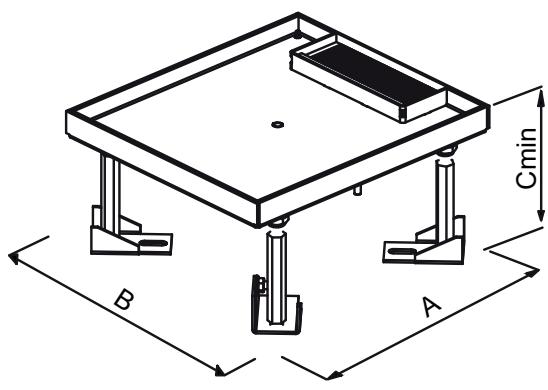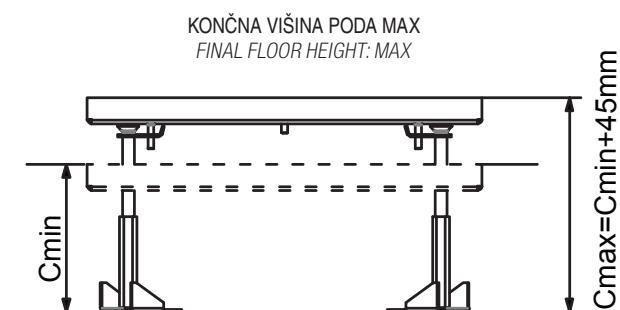KONČNA VIŠINA PODA: MIN
FINAL FLOOR HEIGHT: MIN $C_{\text{max}} = C_{\text{min}} + 45\text{mm}$

TALNA DOZA ZA DVOJNA TLA S POKROVOM 4M

RB55S1



- talna doza za dvojna tla 4M
- kovinska, cinkana
- vgradne mere 200,5 x 177 mm, globina min 100 mm
- nastavljiva višina 100–145 mm
- debelina talne obloge pokrova do 11,5 mm
- ustreza EN 5005-1 in EN 50085-2-2

FLOOR BOX WITH COVER FOR DOUBLE FLOORS 4M

- floor box base 4M
- metal, galvanized
- mounting dimensions 200,5x177mm, min. depth 100mm
- adjustable height 100-145mm
- floor thickness up to 11,5mm
- in accordance with EN 5005-1 and EN 50085-2-2

VLOŽEK TALNE DOZE 4M

RB60



- vložek talne doze 4M
- kovinski, barva bela RAL 9006
- nosilec MODUL 4M vgrajen
- ustreza EN 5005-1 in EN 50085-2-2

INSERT FOR FLOOR DISTRIBUTION BOX 4M

- insert for floor box 4M
- metal, colour white RAL 9006
- mounting frame MODUL 4M included
- in accordance with EN 5005-1 and EN 50085-2-2

TALNA DOZA ZA DVOJNA TLA S POKROVOM 7M

RB56S1



- talna doza za dvojna tla 7M
- kovinska, cinkana
- vgradne mere 265 x 178 mm, globina min 100 mm
- nastavlja višina 100–145 mm
- debelina talne obloge pokrova do 11,5 mm
- ustreza EN 5005-1 in EN 50085-2-2

FLOOR BOX WITH COVER FOR DOUBLE FLOORS 7M

- floor box base 7M
- metal, galvanized
- mounting dimensions 265x178mm, min. depth 100mm
- adjustable height 100-145mm
- floor thickness up to 11.5mm
- in accordance with EN 5005-1 and EN 50085-2-2

VLOŽEK TALNE DOZE 7M

RB61



- vložek talne doze 7M
- kovinski, barva bela RAL 9006
- nosilec MODUL 7M vgrajen
- ustreza EN 5005-1 in EN 50085-2-2

INSERT FOR FLOOR DISTRIBUTION BOX 7M

- insert for floor box 7M
- metal, colour white RAL 9006
- mounting frame MODUL 7M included
- in accordance with EN 5005-1 and EN 50085-2-2

TALNA DOZA ZA DVOJNA TLA S POKROVOM 2X7M

RB57S2



- talna doza za dvojna tla 2 x 7M
- kovinska, cinkana
- vgradne mere 265 x 265 mm, globina min 100 mm
- nastavlja višina 100–145 mm
- debelina talne obloge pokrova do 11,5 mm
- ustreza EN 5005-1 in EN 50085-2-2

FLOOR BOX WITH COVER FOR DOUBLE FLOORS 2X7M

- floor box base 2x7M
- metal, galvanized
- mounting dimensions 265x265mm, min. depth 100mm
- adjustable height 100-145mm
- floor thickness up to 11.5mm
- in accordance with EN 5005-1 and EN 50085-2-2

VLOŽEK TALNE DOZE 2X7M

RB62



- vložek talne doze 2 x 7M
- kovinski, barva bela RAL 9006
- nosilca MODUL 2 x 7M vgrajena
- ustreza EN 5005-1 in EN 50085-2-2

INSERT FOR FLOOR DISTRIBUTION BOX 2X7M

- insert for floor box 2x7M
- metal, colour white RAL 9006
- mounting frames MODUL 2x7M included
- in accordance with EN 5005-1 and EN 50085-2-2

TALNA DOZA ZA DVOJNA TLA S POKROVOM 4X7M

RB58S2



- talna doza za dvojna tla 4 x 7M
- kovinska, cinkana
- vgradne mere 265 x 516,5 mm, globina min 100 mm
- nastavlja višina 100–145 mm
- debelina talne obloge pokrova do 11,5 mm
- ustreza EN 5005-1 in EN 50085-2-2

FLOOR BOX WITH COVER FOR DOUBLE FLOORS 4X7M

- floor box base 4x7M
- metal, galvanized
- mounting dimensions 265x516.5mm, min. depth 100mm
- adjustable height 100-145mm
- floor thickness up to 11.5mm
- in accordance with EN 5005-1 and EN 50085-2-2

VLOŽEK TALNE DOZE 2X7M


RB62




- vložek talne doze 2 x 7M
- kovinski, barva bela RAL 9006
- nosilca MODUL 2 x 7M vgrajena
- ustreza EN 5005-1 in EN 50085-2-2

INSERT FOR FLOOR DISTRIBUTION BOX 2X7M

- insert for floor box 2x7M
- metal, colour white RAL 9006
- mounting frames MODUL 2x7M included
- in accordance with EN 5005-1 and EN 50085-2-2



RB10

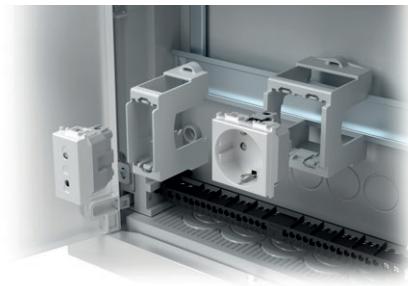


tip type	naziv description	tehnični opis technical data
RB10	ADAPTER ZA DIN LETEV <i>ADAPTER FOR DIN RAIL</i>	35mm 1M
RB11	ADAPTER ZA DIN LETEV <i>ADAPTER FOR DIN RAIL</i>	35mm 2M
.	.	.
.	.	.

ADAPTER ZA DIN LETEV 35mm 1M



RB10

- adapter MODUL 1M
- za DIN letev 35mm
- ustreza EN 50022




ADAPTER ZA DIN LETEV 35mm 2M



RB11

- adapter MODUL 2M
- za DIN letev 35mm
- ustreza EN 50022



TEM

SWITCH
LOGIQ



LOGIQ

LOGIQ
FLAT



LOGIQ
BOLD



LOGIQ
PRIME



LOGIQ
FLAT






LOGIQ
BOLD





LOGIQ
PRIME



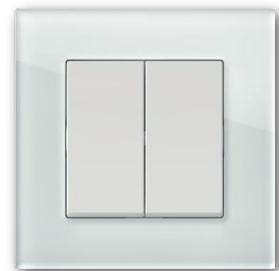


Narejen za vsak prostor

Univerzalne linije stikal pustijo svoj pečat v modernih delovnih okoljih ali v bolj domačih toplih bivalnih prostorih. Za vsako vašo željo vam družina stikal LOGIQ ponuja preprosto in logično rešitev.

Made for every room

The switches have universal lines that make a mark in both modern work environments and cosy, comfortable living spaces. The LOGIQ family of switches offers a simple and logical solution for your every wish.

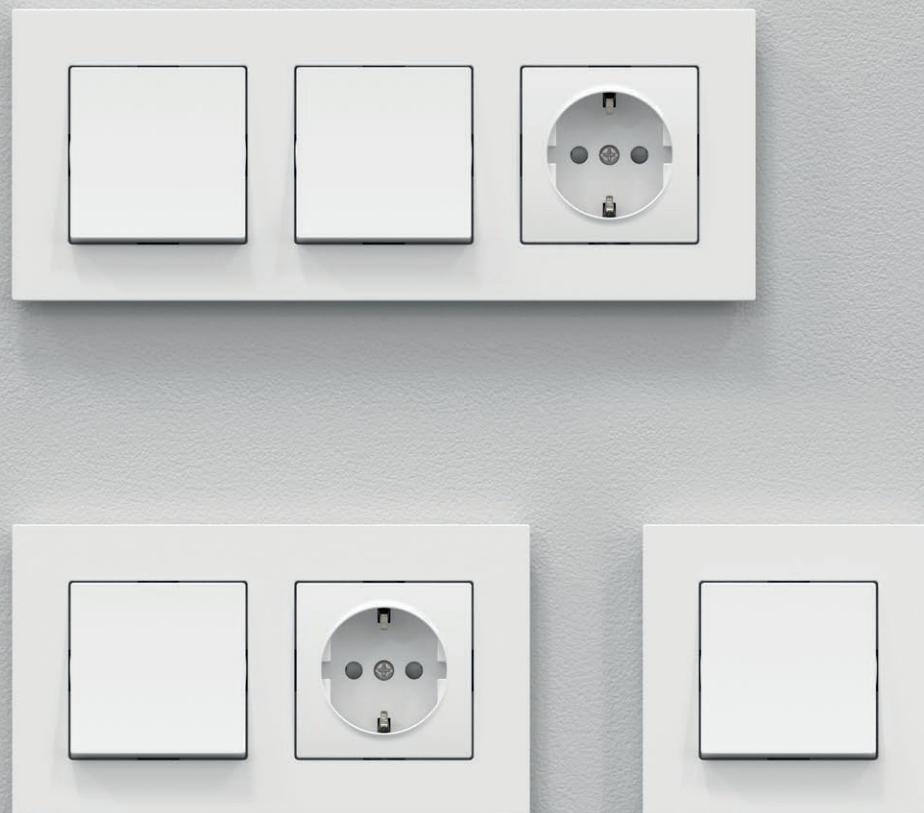

LOGIQ
FLAT



LOGIQ
PRIME

Harmonija barv za vsak prostor

Družino LOGIQ odlikuje logičen izbor preverjenih in elegantnih barvnih odtenkov, ki jih imajo uporabniki najraje. Ne prilagajajte se vi, LOGIQ se prilagaja vam.

Harmony of colours for every room

The LOGIQ family prides itself on its logical range of verified and elegant hues known and loved by our users. Do not compromise, LOGIQ has you covered.

<input type="checkbox"/>	črna	<i>black</i>
<input type="checkbox"/>	antracit	<i>anthracite</i>
<input type="checkbox"/>	titan	<i>titanium</i>
<input type="checkbox"/>	bela-sijaj	<i>polar white</i>



LOGIQ
FLAT



LOGIQ
BOLD



LOGIQ
PRIME


Neomejena domišljija

Družina LOGIQ omogoča sestavljanje poljubnih kombinacij. Za enostavno kombiniranje smo za vas izdelali uporabno dopolnitev, ki olajša nizanje vodoravnih in navpičnih linij. Tako imenovani sistem 55/55 omogoča uporabo enakih univerzalnih elementov.

LIMITLESS IMAGINATION

The LOGIQ family allows you to create your own combinations. To make combining simple, we have created a useful system that supports the sequencing of horizontal and vertical lines. The so-called 55/55 system allows you to use the same universal elements every time.



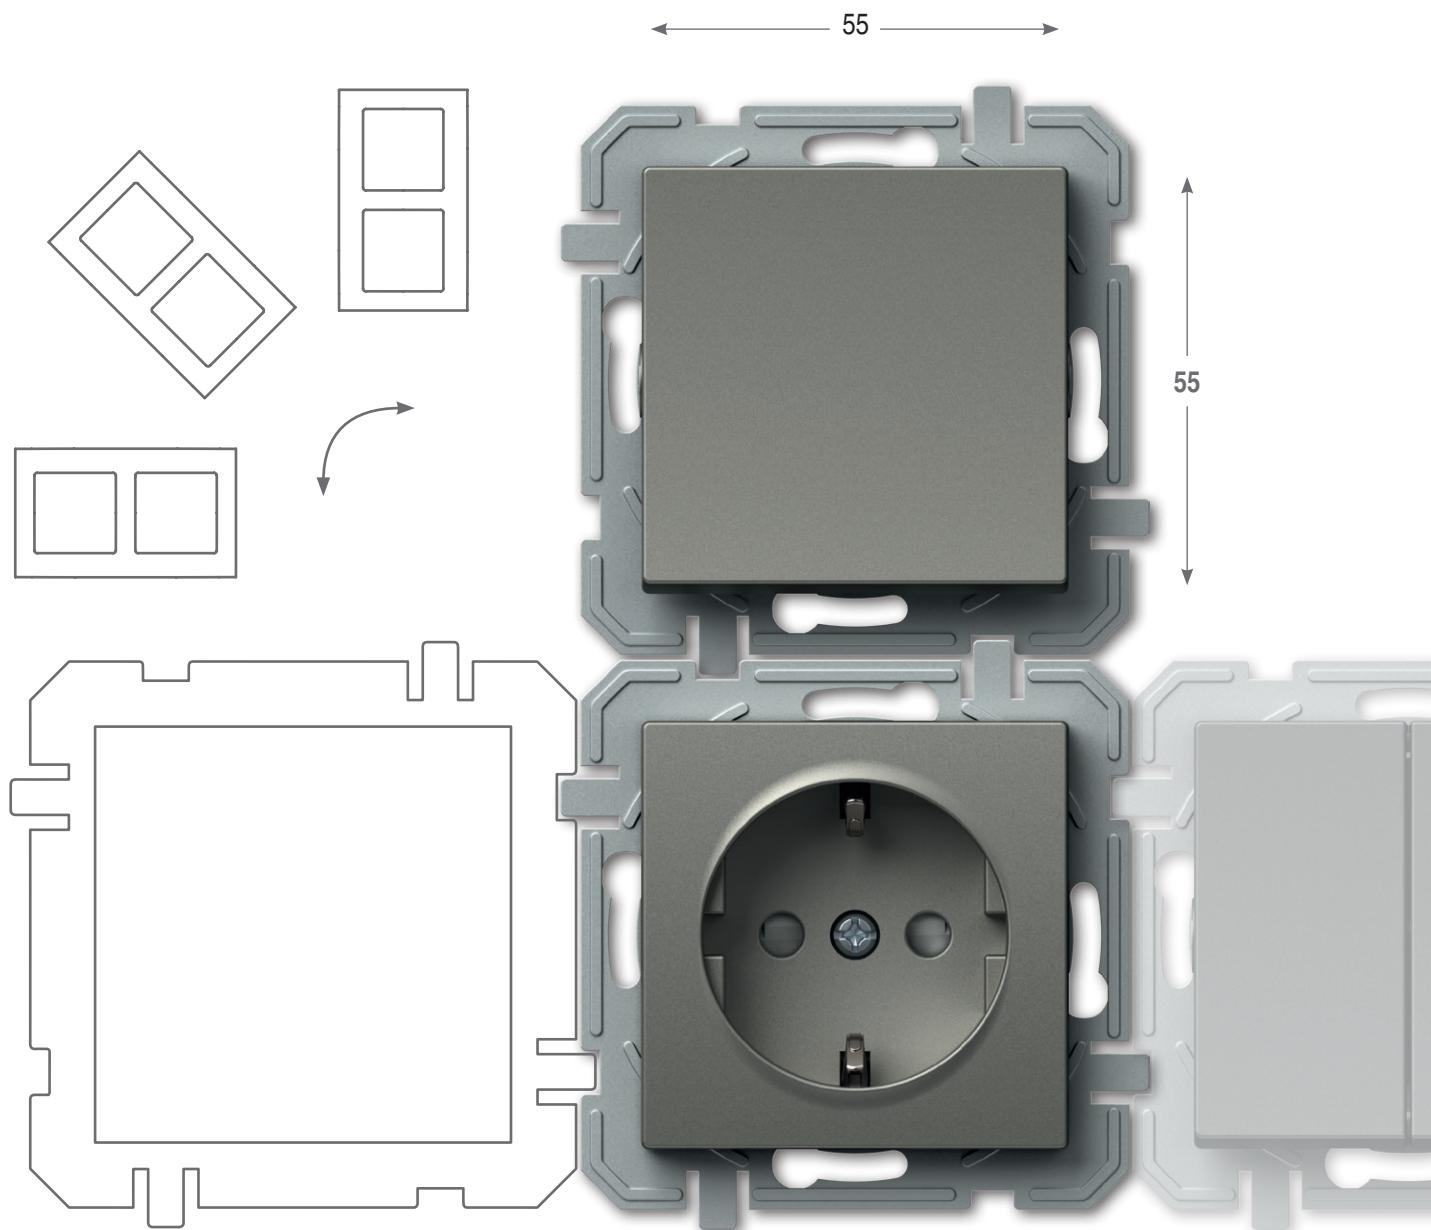


Preprosto za najzahtevnejše

Družina LOGIQ ponuja funkcijске elemente za vsak prostor in namen. Lahko jih uporabite posamično ali v nizu. Vodoravno ali navpično.
Logično.


Simple for the most demanding


The LOGIQ family offers functional elements for every space and purpose. You can use these products individually or in a sequence, horizontally or vertically. Logically.

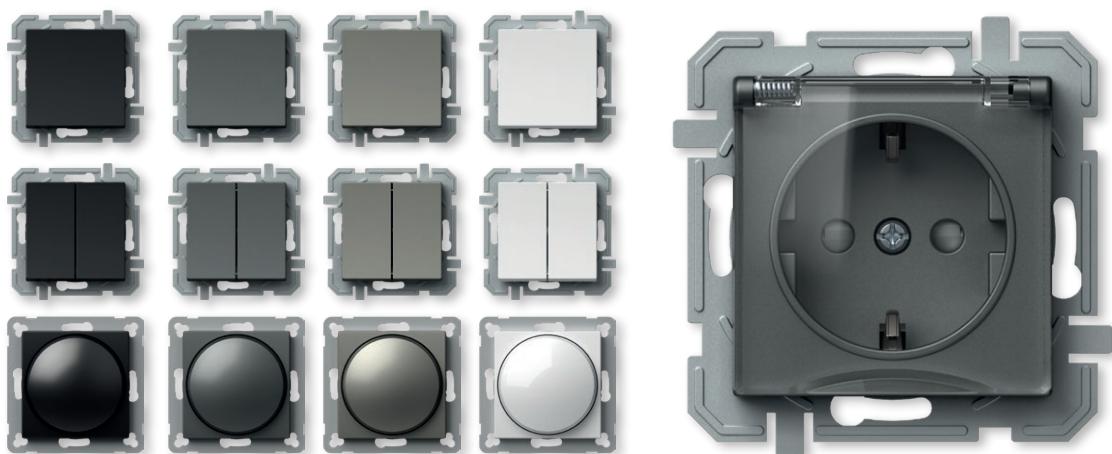

Univerzalna postavitev dekorativnih okvirjev vseh treh oblikovnih linij FLAT, BOLD in PRIME.

A universal layout of decorative cover plates in all three design lines – FLAT, BOLD and PRIME.

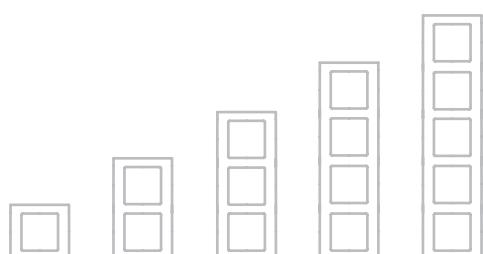

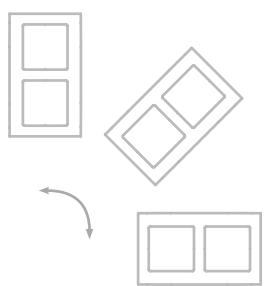


Logična montaža

LOGIQ je rešitev za sistem standardnih okroglih doz. Z njim lahko načrtujete tako enostavne kot tudi zahtevnejše inštalacije, novogradnje in adaptacije. Sistem odlikujejo brezvijačni kontakti, ki vam prihranijo čas pri vgradnji elementov.

Logical installation

LOGIQ is a solution for the system of standardized round installations boxes. It can be used for simple as well as more demanding installations, new buildings and adaptations. The system is characterised by plug-in contacts which save time during installation of elements.

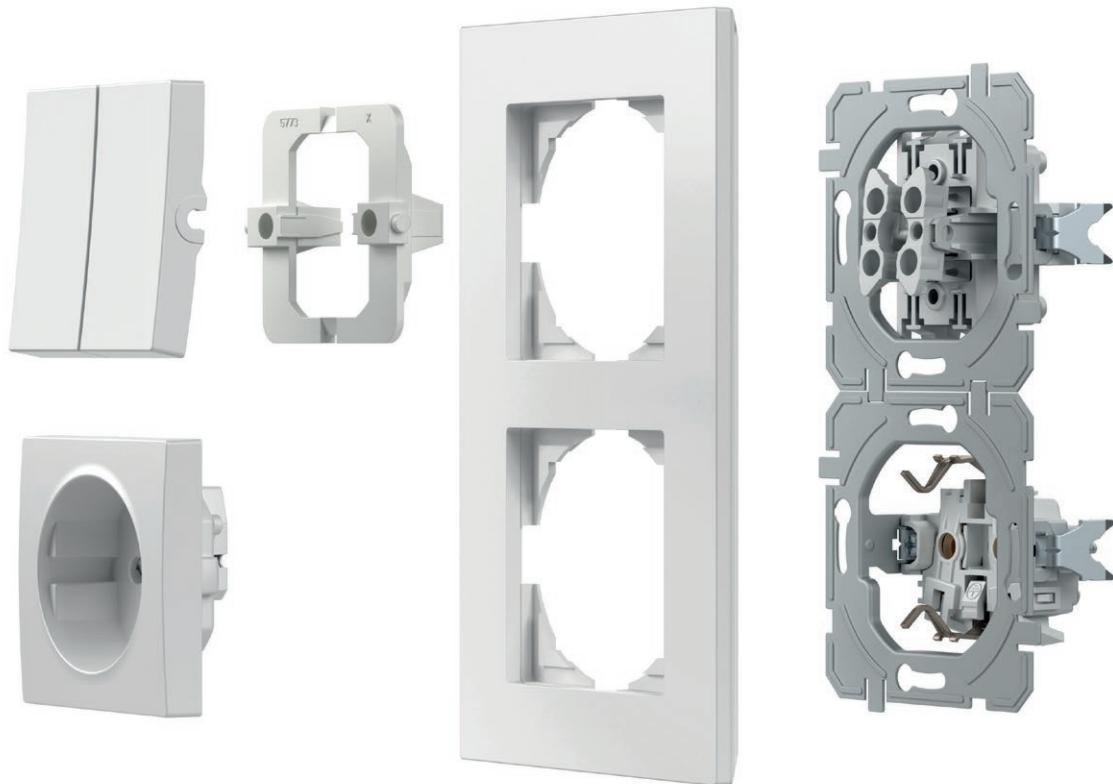

Dobro je vedeti

Good to know



Vse vtičnice imajo vgrajeno varovalo pred dotikom elementov pod napetostjo.

All the sockets are equipped with a safety shutters assuring the protection to live contacts.



Dobro premišljena konstrukcija stikala omogoča enostavno indikacijo tudi naknadno.

The well-thought-out design of the switch enables the easy integration of the indication, including at a later time.



Za zanesljivost preklopa skrbijo kontakti iz srebreve zlitine.

Contacts made of silver alloy guarantee safe switching.



Brezvijačni kontakti omogočajo hitro in zanesljivo priključitev vodnikov. Na isti kontakt lahko pritrdite dva vodnika različnih premerov.

Plug-in contacts enable quick and reliable attachment of wires. Two wires of different diameters can be attached to the same contact.



Krempeljci omogočajo globljo pritrditev (tudi preko keramičnih ploščic ipd.).

Fixing claws enable deeper fixing (also through ceramic tiles, etc.)



Sestavljive doze vam bodo olajšale delo. Prave razdalje so vam zagotovljene.

Easy-fitting installation boxes will make your work easier. Proper lengths are guaranteed.

tip type	naziv description	tehnični opis technical data	barva colour	opcijski opis 1 optional data 1	opcijski opis 2 optional data 2	opcijski opis 3 optional data 3
SQ10	STIKALO ENOPOLNO SWITCH 1WAY	10AX 250V~	<input type="checkbox"/> PW bela - sijaj polar white	NT nevral neutral	01	XO brez okvirja without cover plate
SQ11	TIPKALO ENOPOLNO PUSH BUTTON 1WAY	10A 250V~	<input checked="" type="checkbox"/> TI titan titanium			
SQ22	STIKALO DVOPOLNO SWITCH 2POLE	16AX 250V~	<input type="checkbox"/> AT antracit anthracite	IN indikator indicator	02	
.	.	.	<input type="checkbox"/> BK črna black		03	
.	.	.				:

STIKALO ENOPOLNO 10AX 250V~



- SQ10PWXO
- SQ10TIKO
- SQ10ATXO
- SQ10BKXO



- 10AX 250V~, tip SQ10
- ustreza EN 60669-1
- brezvijačna pritridlej vodnikov 1.5-2.5mm²

SWITCH 1WAY 10AX 250V~

- 10AX 250V~, type SQ10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²



- SQ10PWINXO
- SQ10TIINXO
- SQ10ATINXO
- SQ10BKINXO




- IN indikator, brez tlivke
- 10AX 250V~, tip SQ10
- ustreza EN 60669-1
- brezvijačna pritridlej vodnikov 1.5-2.5mm²

SWITCH 1WAY 10AX 250V~ IN

- IN indicator, without neon lamp
- 10AX 250V~, type SQ10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²




- SQ11PWXO
- SQ11TIKO
- SQ11ATXO
- SQ11BKXO




- 10A 250V~, tip SQ11
- ustreza EN 60669-1
- brezvijačna pritridlej vodnikov 1.5-2.5mm²

PUSH BUTTON 1WAY 10A 250V~

- 10A 250V~, type SQ11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²



- SQ11PWIN01XO
- SQ11TIIN01XO
- SQ11ATIN01XO
- SQ11BKIN01XO



- IN 01 indikator zvonec, brez tlivke
- 10A 250V~, tip SQ11
- ustreza EN 60669-1
- brezvijačna pritridlej vodnikov 1.5-2.5mm²

PUSH BUTTON 1WAY 10A 250V~ IN 01

- IN 01 indicator bell, without neon lamp
- 10A 250V~, type SQ11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²



S W I T C H E S S Q



- SQ11PWIN02XO
 SQ11TIIN02XO
 SQ11ATIN02XO
 SQ11BKIN02XO




TIPKALO ENOPOLNO 10A 250V~ IN 02

- IN 02 indikator luč, brez tlivke
- 10A 250V~, tip SQ11
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²



- SQ11PWILXO
 SQ11TIIILXO
 SQ11ATILXO
 SQ11BKILXO




TIPKALO ENOPOLNO 10A 250V~ IL

- IL napisna ploščica
- 10A 250V~, tip SQ11
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²



- SQ22PWIN03XO
 SQ22TIIN03XO
 SQ22ATIN03XO
 SQ22BKIN03XO




STIKALO DVOPOLNO 16AX 250V~ IN 03

- IN 03 nevral 0-1, brez tlivke
- 16AX 250V~, tip SQ22
- ustreza EN 60669-1
- viačna pritridlev vodnikov 1.5-2.5mm²



- SQ50PWXO
 SQ50TIKO
 SQ50ATXO
 SQ50BKXO




STIKALO SERIJSKO 10AX 250V~

- 10AX 250V~, tip SQ50
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²



- SQ51PWXO
 SQ51TIKO
 SQ51ATXO
 SQ51BKXO




TIPKALO SERIJSKO 10A 250V~

- 10A 250V~, tip SQ51
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²



- SQ52PWNT09XO
 SQ52TINT09XO
 SQ52ATNT09XO
 SQ52BKNT09XO



STIKALO ŽALUZIJSKO 10AX 250V~ NT 09

- NT 09 nevral gor-dol
- 10AX 250V~, tip SQ52
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²
- z mehansko blokado hkratnega vklopa




SWITCH SHUTTERS 10AX 250V~ NT 09

- NT 09 neutral up-down
- 10AX 250V~, tip SQ52
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²
- with mechanical interlock



- SQ53PWNT09XO
- SQ53TINT09XO
- SQ53ATNT09XO
- SQ53BKNT09XO



TIPKALO ŽALUZIJSKO 10A 250V~_NT 09

- NT 09 nevral gor-dol
- 10A 250V~, tip SQ53
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²
- z mehansko blokado hkratnega vklopa




PUSH BUTTON SHUTTERS 10A 250V~_NT 09

- NT 09 neutral up-down
- 10A 250V~, type SQ53
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²
- with mechanical interlock



- SQ60PWXO
- SQ60TIKO
- SQ60ATXO
- SQ60BKXO



STIKALO MENJALNO 10AX 250V~

- 10AX 250V~, tip SQ60
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²



SWITCH 2WAY 10AX 250V~

- 10AX 250V~, type SQ60
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²



- SQ60PWINXO
- SQ60TIINXO
- SQ60ATINXO
- SQ60BKINXO



STIKALO MENJALNO 10AX 250V~_IN

- IN indikator, brez tlivke
- 10AX 250V~, tip SQ60
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²




SWITCH 2WAY 10AX 250V~_IN

- IN indicator, without neon lamp
- 10AX 250V~, type SQ60
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²



- SQ60PWIN02XO
- SQ60TIIN02XO
- SQ60ATIN02XO
- SQ60BKIN02XO



STIKALO MENJALNO 10AX 250V~_IN 02

- IN 02 indikator luč, brez tlivke
- 10AX 250V~, tip SQ60
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²



SWITCH 2WAY 10AX 250V~_IN 02


- IN 02 indicator light, without neon lamp
- 10AX 250V~, type SQ60
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²



STIKALO DVOJNO MENJALNO 10AX 250V~



- SQ63PWXO
- SQ63TIXO
- SQ63ATXO
- SQ63BKXO



- 10AX 250V~, tip SQ63

- ustreza EN 60669-1

- brezvijačna pririditev vodnikov 1.5-2.5mm²

SWITCH DOUBLE 2WAY 10AX 250V~

- 10AX 250V~, type SQ63

- in accordance with EN 60669-1


- plug-in contacts 1.5-2.5mm²



STIKALO KRIŽNO 10AX 250V~



- SQ70PWXO
- SQ70TIXO
- SQ70ATXO
- SQ70BKXO



- 10AX 250V~, tip SQ70

- ustreza EN 60669-1










- brezvijačna pririditev vodnikov 1.5-2.5mm²


SWITCH INTERMEDIATE 10AX 250V~

- 10AX 250V~, type SQ70

- in accordance with EN 60669-1

- plug-in contacts 1.5-2.5mm²














tip type	naziv description	tehnični opis technical data	barva colour
IA10	TLIVKA <i>NEON LAMP</i>	230V~ 0,34W	<input type="checkbox"/> WH bela <i>white</i>
IA20	LED SIGNALIZACIJA <i>LED SIGNALLING UNIT</i>	230V~ 0,40W	<input checked="" type="checkbox"/> BL modra <i>blue</i>
IA21	LED SIGNALIZACIJA <i>LED SIGNALLING UNIT</i>	24V AC/DC 0,20W	<input checked="" type="checkbox"/> RD rdeča <i>red</i>
.	.	.	<input checked="" type="checkbox"/> GR zelena <i>green</i>
.	.	.	<input checked="" type="checkbox"/> OR oranžna <i>orange</i>
<hr/>			
TLIVKA 230V~ 0,34W			
 ■ IA10OR <ul style="list-style-type: none"> - za indikacijo, signalizacijo ali stalno signalizacijo stikala - v kombinaciji s tipko z indikatorjem <p>NEON LAMP 230V~ 0,34W</p> <ul style="list-style-type: none"> - for indication, signalling or permanent signalling - in combination with a button featuring an indicator 			
<hr/>			
LED SIGNALIZACIJA 230V AC/DC 0,40W			
 <ul style="list-style-type: none"> <input type="checkbox"/> IA20WH <input checked="" type="checkbox"/> IA20GR <input checked="" type="checkbox"/> IA20RD <input checked="" type="checkbox"/> IA20BL <ul style="list-style-type: none"> - za indikacijo, signalizacijo ali stalno signalizacijo stikala - v kombinaciji s tipko z indikatorjem <p>LED SIGNALLING UNIT 230V AC/DC 0,40W</p> <ul style="list-style-type: none"> - for indication, signalling or permanent signalling - in combination with a button featuring an indicator 			
<hr/>			
LED SIGNALIZACIJA 24V AC/DC 0,20W			
 <ul style="list-style-type: none"> <input type="checkbox"/> IA21WH <input checked="" type="checkbox"/> IA21RD <ul style="list-style-type: none"> - za indikacijo, signalizacijo ali stalno signalizacijo stikala - v kombinaciji s tipko z indikatorjem <p>LED SIGNALLING UNIT 24V AC/DC 0,20W</p> <ul style="list-style-type: none"> - for indication, signalling or permanent signalling - in combination with a button featuring an indicator 			
<hr/>			
LED SIGNALIZACIJA 12V AC/DC 0,10W			
 <ul style="list-style-type: none"> <input type="checkbox"/> IA22WH <input checked="" type="checkbox"/> IA22RD <ul style="list-style-type: none"> - za indikacijo, signalizacijo ali stalno signalizacijo stikala - v kombinaciji s tipko z indikatorjem <p>LED SIGNALLING UNIT 12V AC/DC 0,10W</p> <ul style="list-style-type: none"> - for indication, signalling or permanent signalling - in combination with a button featuring an indicator 			
<hr/>			
			

S I G N A L I Z A T I O N I A

Indikacija /
Indication

*Signalizacija /
Signalization

Stalna signalizacija /
Permanent signalling

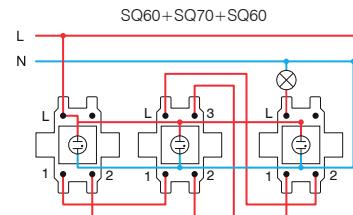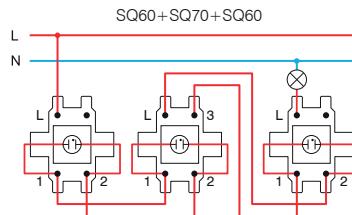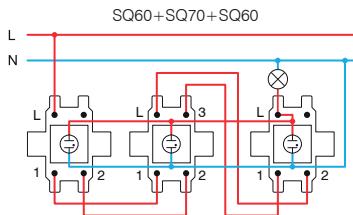

* vezave niso primerne za varčne (CFL, LED) sijalke /
the connections are not suitable for energy-saving bulbs (CFL, LED)



VQ10



PW



XO




tip type	naziv description	tehnični opis technical data	opcijski opis 1 optional data 1
VQ10	VTIČNICA SCHUKO SOCKET SCHUKO	2P+E 16A 250V~	XO brez okvirja <i>without cover plate</i>
VQ11	VTIČNICA SCHUKO+POKROV SOCKET SCHUKO+COVER	2P+E 16A 250V~	
VQ12	VTIČNICA SCHUKO SOCKET SCHUKO	2P+E 16A 250V~ BV	
.	.	.	
.	.	.	
.	.	.	

barva colour			
<input type="checkbox"/> PW	bela - sijaj <i>polar white</i>	<input checked="" type="checkbox"/> PT	bela+prozorna <i>white+transparent</i>
<input checked="" type="checkbox"/> TI	titan <i>titanium</i>	<input checked="" type="checkbox"/> TT	titan+prozorna <i>titanium+transparent</i>
<input type="checkbox"/> AT	antracit <i>anthracite</i>	<input checked="" type="checkbox"/> AT	antracit+prozorna <i>anthracite+transparent</i>
<input type="checkbox"/> BK	črna <i>black</i>	<input checked="" type="checkbox"/> BT	črna+prozorna <i>black+transparent</i>
<input type="checkbox"/> RD	rdeča <i>red</i>	<input checked="" type="checkbox"/> RT	rdeča+prozorna <i>red+transparent</i>
<input type="checkbox"/> GR	zelená <i>green</i>	<input checked="" type="checkbox"/> GT	zelená+prozorna <i>green+transparent</i>
<input type="checkbox"/> OR	oranžna <i>orange</i>	<input checked="" type="checkbox"/> OT	oranžna+prozorna <i>orange+transparent</i>
		<input type="checkbox"/> PP	bela+bela <i>white+white</i>
		<input checked="" type="checkbox"/> TI	titan+titan <i>titanium+titanium</i>
		<input type="checkbox"/> AA	antracit+antracit <i>anthracite+anthracite</i>
		<input type="checkbox"/> BB	črna+črna <i>black+black</i>
		<input type="checkbox"/> RR	rdeča+rdeča <i>red+red</i>
		<input type="checkbox"/> GG	zelená+zelená <i>green+green</i>
		<input type="checkbox"/> OO	oranžna+oranžna <i>orange+orange</i>




schuko - ustreza EN 60884-1, CEE7 (list III)

schuko - in accordance with EN 60884-1, CEE7 (standard sheet III)




- vijačna pritrditev vodnikov
screw contacts



- BV brezvijačna pritrditev vodnikov
BV plug-in contacts

S O C K E T S V Q

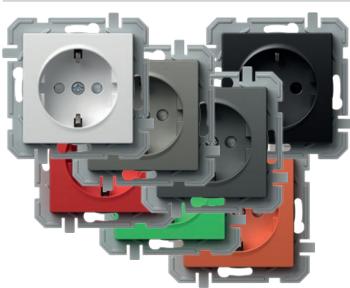

- VQ10PWXO
 VQ10TIXO
 VQ10ATXO
 VQ10BKXO

 VQ10RDXO
 VQ10GRXO
 VQ10ORXO

VTIČNICA SCHUKO 2P+E 16A 250V~ __ XO

- vijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E schuko
- 16A 250V~, tip VQ10
- vgrajena zaščita pred dotikom kontaktov




- VQ11PTXO
 VQ11TTXO
 VQ11ATXO
 VQ11BTXO

 VQ11PPXO

VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~ __ XO

- vijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E schuko+pokrov
- 16A 250V~, tip VQ11
- vgrajena zaščita pred dotikom kontaktov

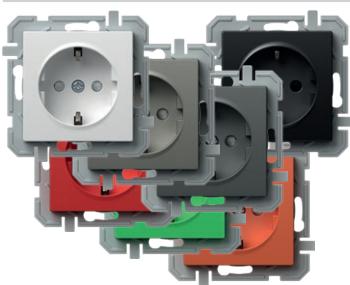

- VQ12PWXO
 VQ12TIXO
 VQ12ATXO
 VQ12BKXO

 VQ12RDXO
 VQ12GRXO
 VQ12ORXO

VTIČNICA SCHUKO 2P+E 16A 250V~ BV __ XO

- BV brezvijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E schuko
- 16A 250V~, tip VQ12
- vgrajena zaščita pred dotikom kontaktov







- VQ13PTXO
 VQ13TTXO
 VQ13ATXO
 VQ13BTXO


 VQ13PPXO

VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~ BV __ XO

- BV brezvijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E schuko+pokrov
- 16A 250V~, tip VQ13
- vgrajena zaščita pred dotikom kontaktov



VTIČNICA FRANCOSKA 2P+E 16A 250V~ __ XO

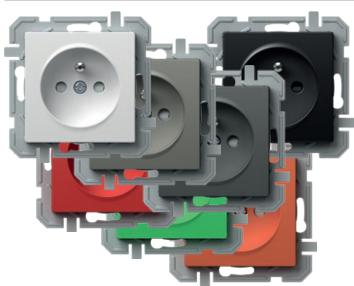

VQ40PWXO
 VQ40TIXO
 VQ40ATXO
 VQ40BKXO

VQ40RDXO
 VQ40GRXO
 VQ40ORXO

- vijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E francoška
- 16A 250V~, tip VQ40
- vgrajena zaščita pred dotikom kontaktov

SOCKET FRENCH 2P+E 16A 250V~ __ XO
- screw contacts 1.5-2.5mm²
- XO without surround
- 2P+E French
- 16A 250V~, type VQ40
- shuttered live contacts



VQ41PTXO
 VQ41TTXO
 VQ41ATXO
 VQ41BTXO

VQ41PPXO

- vijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E francoška+pokrov
- 16A 250V~, tip VQ41
- vgrajena zaščita pred dotikom kontaktov

SOCKET FRENCH+COVER 2P+E 16A 250V~ __ XO
- screw contacts 1.5-2.5mm²
- XO without surround
- 2P+E French+cover
- 16A 250V~, type VQ41
- shuttered live contacts



VQ16PWF
 VQ16TIF
 VQ16ATF
 VQ16BKF

VTIČNICA SCHUKO DVOJNA 2P+E 16A 250V~

- 2P+E schuko dvojna
- 16A 250V~, tip VQ16
- ustreza IEC 60884-1, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov

SOCKET SCHUKO DOUBLE 2P+E 16A 250V~
- 2P+E schuko double
- 16A 250V~, type VQ16
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm²
- shuttered live contacts








VQ16PW
 VQ16TI
 VQ16AT
 VQ16BK

VTIČNICA SCHUKO DVOJNA 2P+E 16A 250V~

- 2P+E schuko dvojna
- 16A 250V~, tip VQ16
- ustreza IEC 60884-1, CEE7
- vijačna pritrditev vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov

SOCKET SCHUKO DOUBLE 2P+E 16A 250V~
- 2P+E schuko double
- 16A 250V~, type VQ16
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm²
- shuttered live contacts

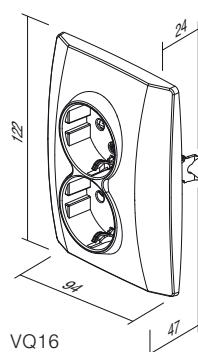

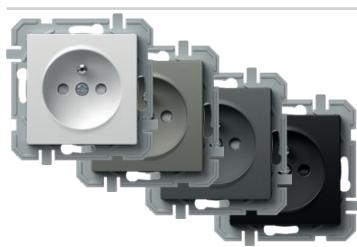

- VQ42PWXO
 VQ42TIXO
 VQ42ATXO
 VQ42BKXO

VTIČNICA FRANCOSKA 2P+E 16A 250V~ BV __ XO

- BV brezvijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E fransoska
- 16A 250V~, tip VQ42
- vgrajena zaščita pred dotikom kontaktov



SOCKET FRENCH 2P+E 16A 250V~ BV __ XO

- BV plug-in contacts 1.5-2.5mm²
- XO without surround
- 2P+E French
- 16A 250V~, type VQ42
- shuttered live contacts



- VQ43PTXO
 VQ43TTXO
 VQ43ATXO
 VQ43BTXO

- VQ43PPXO

VTIČNICA FRANCOSKA+POKROV 2P+E 16A 250V~ BV __ XO

- BV brezvijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E fransoska+pokrov
- 16A 250V~, tip VQ43
- vgrajena zaščita pred dotikom kontaktov



SOCKET FRENCH+COVER 2P+E 16A 250V~ BV __ XO

- BV plug-in contacts 1.5-2.5mm²
- XO without surround
- 2P+E French+cover
- 16A 250V~, type VQ43
- shuttered live contacts



- VQ46PWF
 VQ46TI
 VQ46ATF
 VQ46BKF

VTIČNICA FRANCOSKA DVOJNA 2P+E 16A 250V~

- 2P+E fransoska dvojna
- 16A 250V~, tip VQ46
- ustreza IEC 60884-1, CEE7; NF C 61-314, ČSN 33 2318; PN-E 93201
- vijačna pritrditev vodnikov 1,5-2,5 mm²
- vgrajena zaščita pred dotikom kontaktov



SOCKET FRENCH DOUBLE 2P+E 16A 250V~

- 2P+E French double
- 16A 250V~, type VQ46
- in accordance with IEC 60884-1, CEE7; NF C 61-314, ČSN 33 2318; PN-E 93201
- screw contacts 1,5-2,5 mm²
- shuttered live contacts



- VQ46PW
 VQ46TI
 VQ46AT
 VQ46BK





VTIČNICA FRANCOSKA DVOJNA 2P+E 16A 250V~

- 2P+E fransoska dvojna
- 16A 250V~, tip VQ46
- ustreza IEC 60884-1, CEE7; NF C 61-314, ČSN 33 2318; PN-E 93201
- vijačna pritrditev vodnikov 1,5-2,5 mm²
- vgrajena zaščita pred dotikom kontaktov



SOCKET FRENCH DOUBLE 2P+E 16A 250V~

- 2P+E French double
- 16A 250V~, type VQ46
- in accordance with IEC 60884-1, CEE7; NF C 61-314, ČSN 33 2318; PN-E 93201
- screw contacts 1,5-2,5 mm²
- shuttered live contacts





KQ37

PW

XO

tip type	naziv description	tehnični opis technical data	barva colour	opcijski opis 1 optional data 1
KQ11	VTIČNICA TV-R KONČNA SOCKET TV-R END-LINE	1dB	<input type="checkbox"/> PW bela - sijaj polar white	XO brez okvirja without cover plate
KQ12	VTIČNICA TV-R PREHODNA SOCKET TV-R THROUGHPASS	10dB	<input checked="" type="checkbox"/> TI titan titanium	
KQ16	VTIČNICA SAT-TV-R KONČNA SOCKET SAT-TV-R END-LINE	3dB	<input type="checkbox"/> AT antracit anthracite	
.	.	.	<input type="checkbox"/> BK črna black	



KQ10PWXO
 KQ10TIKO
 KQ10ATXO
 KQ10BKXO

VTIČNICA TV OSNOVNA 0dB

- TV osnovna
 - dušenje 0dB
 - konektor zadaj – F standard
SOCKET TV BASIC 0dB
 - TV basic
 - reduction 0dB
 - back connector – F standard




KQ11PWXO
 KQ11TIKO
 KQ11ATXO
 KQ11BKXO

VTIČNICA TV-R KONČNA 1dB

- TV-R končna
 - frekvenčni pas 5÷862 MHz
 - dušenje: R-1.5dB, TV-1dB
 - ustreza EN 50083-1
 - vijačna priključitev
SOCKET TV-R END-LINE 1dB
 - TV-R end-line
 - frequency range 5÷862 MHz
 - reduction: R-1.5dB, TV-1dB
 - in accordance with EN 50083-1
 - screw contact



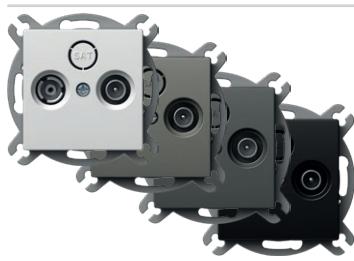

- KQ12PWXO
- KQ12TIXO
- KQ12ATXO
- KQ12BKXO

VTIČNICA TV-R PREHODNA 10dB

- TV-R prehodna
- frekvenčni pas 5÷862 MHz
- dušenje: R-10dB, TV-10dB, prehod-2dB
- ustreza EN 50083-1
- vijačna priključitev

SOCKET TV-R TROUGHPASS 10dB

- TV-R troughpass
- frequency range 5÷862 MHz
- reduction: R-10dB, TV-10dB, trough-2dB
- in accordance with EN 50083-1
- screw contacts



- KQ16PWXO
- KQ16TIXO
- KQ16ATXO
- KQ16BKXO

VTIČNICA SAT-TV-R KONČNA 3dB

- SAT-TV-R končna
- frekvenčni pas 5÷2400 MHz
- dušenje: R-1dB, TV-1.5dB, SAT-3dB
- ustreza EN 50083-1
- vijačna priključitev

SOCKET SAT-TV-R END-LINE 3dB

- SAT-TV-R end-line
- frequency range 5÷2400 MHz
- reduction: R-1dB, TV-1.5dB, SAT-3dB
- in accordance with EN 50083-1
- screw contacts



- KQ22PWXO
- KQ22TIXO
- KQ22ATXO
- KQ22BKXO

VTIČNICA AVDIO 2xRCA

- avdio 2xRCA
- pritrdirtev vodnikov s spajkanjem

SOCKET AUDIO 2xRCA

- audio 2xRCA
- soldering connection of cable





- KQ23PWXO
- KQ23TIKO
- KQ23ATXO
- KQ23BKXO

VTIČNICA AVDIO ZVOČNIŠKA

- avdio 2x Ø4mm
- za priklop zvočniškega vodnika, vtiča Ø4mm ali viličastega kabel čevlja
- pritrdirtev vodnikov zadaj s spajkanjem

SOCKET AUDIO LOUDSPEAKERS

- audio 2x Ø4mm
- to accommodate speaker wire, banana plug Ø4mm or spades
- soldering connection of cable at the back side




- KQ36PWXO
- KQ36TIKO
- KQ36ATXO
- KQ36BKXO

VTIČNICA TEL KS RJ11 6/4

- KS keystone pritrditveni standard
- RJ11 6/4
- ustreza IEC 60603-7

SOCKET TEL KS RJ11 6/4

- KS keystone fixing standard
- RJ11 6/4
- in accordance with IEC 60603-7

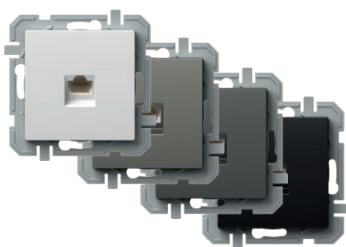

- KQ37PWXO
- KQ37TIKO
- KQ37ATXO
- KQ37BKXO

VTIČNICA CAT5e KS RJ45 8/8

- KS keystone pritrditveni standard
- CAT5e, RJ45 8/8
- ustreza IEC 60603-7

SOCKET CAT5e KS RJ45 8/8

- KS keystone fixing standard
- CAT5e, RJ45 8/8
- in accordance with IEC 60603-7



- KQ38PWXO
- KQ38TIKO
- KQ38ATXO
- KQ38BKXO

VTIČNICA TEL KS DVOJNA 2x RJ11 6/4

- KS keystone pritrditveni standard
- 2x RJ11, 6/4
- ustreza IEC 60603-7

SOCKET TEL KS DOUBLE 2x RJ11 6/4

- KS keystone fixing standard
- 2x RJ11, 6/4
- in accordance with IEC 60603-7






- KQ39PWXO
- KQ39TIXO
- KQ39ATXO
- KQ39BKXO

VTIČNICA CAT5e KS DVOJNA 2x RJ45 8/8

- KS keystone pritrditveni standard
- 2x CAT5e, RJ45 8/8
- ustreza IEC 60603-7



- KQ35PWXO
- KQ35TIXO
- KQ35ATXO
- KQ35BKXO

VTIČNICA TEL LT RJ11 6/4

- TEL LT vijak
- vijačna pritrditev vodnikov
- RJ11 6/4
- ustreza IEC 60603-7



- KQ40PWXO
- KQ40TIXO
- KQ40ATXO
- KQ40BKXO

VTIČNICA CAT6s KS RJ45 8/8 SLIM


- KS keystone pritrditveni standard
- CAT6s, RJ45 8/8
- ustreza IEC 60603-7



- KQ41PWXO
- KQ41TIXO
- KQ41ATXO
- KQ41BKXO

VTIČNICA CAT6s KS DVOJNA 2x RJ45 8/8 SLIM

- KS keystone pritrditveni standard
- 2xCAT6, RJ45 8/8
- ustreza IEC 60603-7

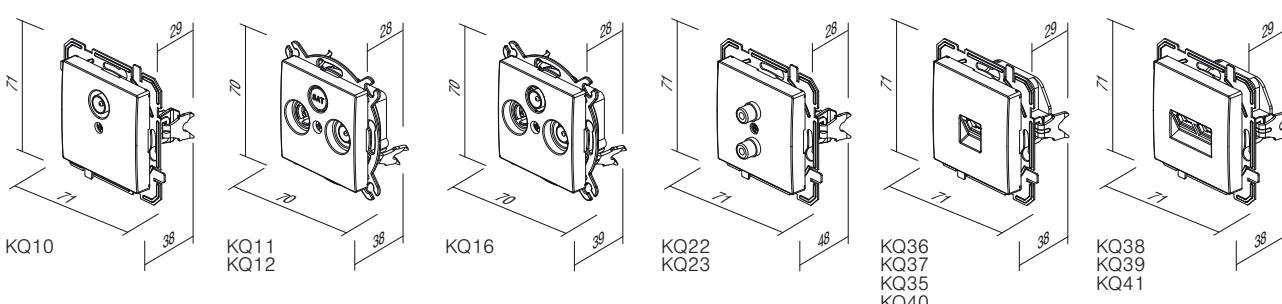

tip type	naziv description	tehnični opis technical data	barva colour	opcijski opis 1 optional data 1
EQ15	ZATEMNILNIK ROTACIJSKI MEN DIMMER ROTATIVE 2WAY	RL 400W	<input type="checkbox"/> PW bela - sijaj polar white	XO brez okvirja without cover plate
EQ16	ZATEMNILNIK ROTACIJSKI MEN DIMMER ROTATIVE 2WAY	RLC 400W	<input checked="" type="checkbox"/> TI titan titanium	
EQ19	ZATEMNILNIK ROTACIJSKI MEN DIMMER ROTATIVE 2WAY	LED 100W	<input checked="" type="checkbox"/> AT antracit anthracite	
.	.	.	<input checked="" type="checkbox"/> BK črna black	



- EQ15PWXO
- EQ15TIKO
- EQ15ATXO
- EQ15BKXO



ZATEMNILNIK ROTACIJSKI MEN RL 400W

- rotacijski z menjalnim stikaloma
- breme RL, 40W - 400W
- možna vezava z menjalnim stikaloma
- vezava več zatemnilnikov ni dovoljena
- ustreza EN 60669-1 in EN 60669-2-1
- brezvijačna pritridlev vodnikov 1.5mm²
- napajanje 230V~ 50Hz
- zamenljiva varovalka vključena



DIMMER ROTATIVE 2WAY RL 400W

- rotation control with 2-way switch
- load RL, 40W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm²
- supply 230V~ 50Hz
- replaceable fuse included



- EQ16PWXO
- EQ16TIKO
- EQ16ATXO
- EQ16BKXO




ZATEMNILNIK ROTACIJSKI MEN RLC 400W

- rotacijski z menjalnim stikaloma
- breme RLC, 20W - 400W
- možna vezava z menjalnim stikaloma
- vezava več zatemnilnikov ni dovoljena
- ustreza EN 60669-1 in EN 60669-2-1
- brezvijačna pritridlev vodnikov 1.5mm²
- napajanje 230V~ 50Hz
- elektronska varovalka



DIMMER ROTATIVE 2WAY RLC 400W

- rotation control with 2-way switch
- load RLC, 20W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm²
- supply 230V~ 50Hz
- electronic fuse



- EQ19PWXO
- EQ19TIKO
- EQ19ATXO
- EQ19BKXO



ZATEMNILNIK ROTACIJSKI MEN LED 100W


- rotacijski z menjalnim stikaloma
- breme: LED, 0-100W (max. 10 LED sijalk)
GLS, 10-250W
- možna vezava z menjalnim stikaloma
- vezava več zatemnilnikov ni dovoljena
- ustreza EN 60669-1 in EN 60669-2-1
- brezvijačna pritridlev vodnikov 1,5 mm²
- napajanje 230V~ 50 Hz
- zamenljiva varovalka vključena




DIMMER ROTATIVE 2WAY LED 100W

- rotation control with 2-way switch
- load: LED, 0-100W (max. 10 LEDs)
GLS, 10-250W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm²
- supply 230V~ 50Hz
- replaceable fuse included


EQ15, EQ16, EQ19




EQ15, EQ16, EQ19

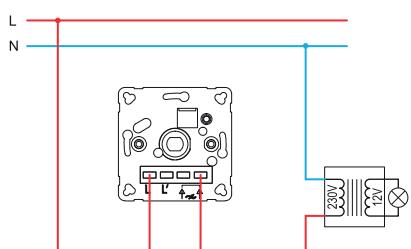


EQ16, EQ19

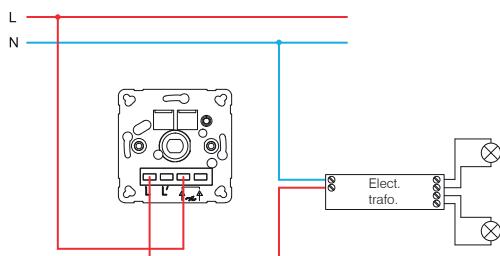


EQ15, EQ16, EQ19

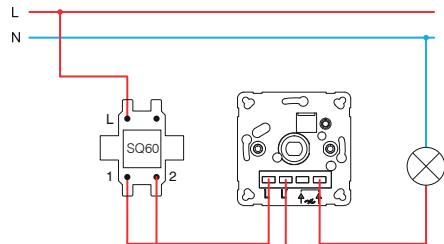


EQ15, EQ16, EQ19

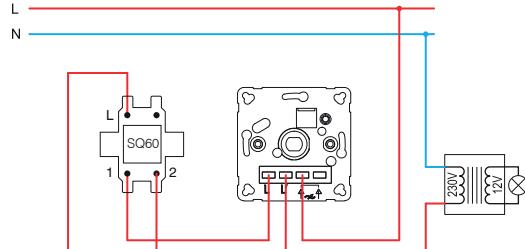

EQ16, EQ19

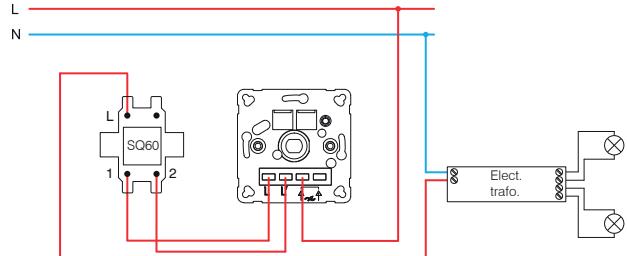


EQ15 (40÷400W)



1 - žarnica z žarilno nitko /
incandescent lamp

2 - halogenska žarnica /
halogen lamp


EQ16 (20÷400W)

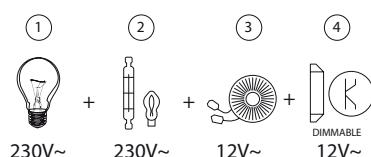

3 - klasični transformator /
classical transformer

4 - zatemnilni el. transformator /
dimmable electronic transformer


EQ19 (GLS 10÷250W ; LED 0÷100W)

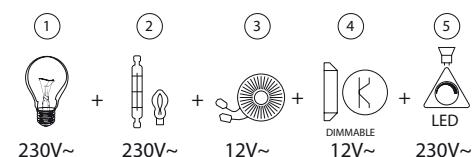

5 - zatemnilna LED sijalka /
dimmable LED lamp

KRMILNI modul MZC za EM18


EM17

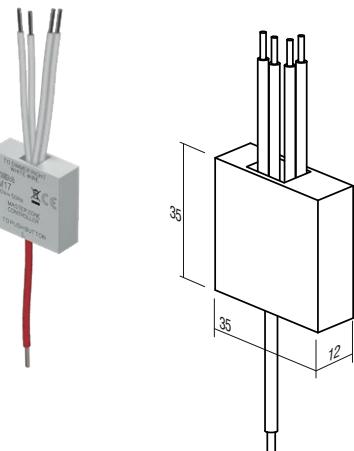

- MZC priklopite po vezalni shemi.
- možna vezava z več tipkali
- montaža samo ene naprave v eno dozo
- samo za notranjo uporabo
- napajanje: 230 V~ 50Hz
- maksimalna upornost žic: 50 kΩ
- maksimalen tok na enoto MZC: 10 mA
- število zatemnilnikov na MZC: 1-4
- maksimalno število MZC v vezavi: omejeno na varovalko v tokokrogu
- temperatura delovanja: -5 °C do 45 °C
- temperatura skladisjenja: -30 °C do 80 °C
- maksimalna vlažnost: 90 % (brez kondenziranja)
- dimenzijske ohišja: 36 x 36 x 12 mm


MZC CONTROL Module for EM18

- Connect the MZC according to the wiring diagram.
- Possible wiring with several push buttons.
- Only one device installation per mounting box.
- For indoor use only.
- Power supply: 230V~ 50Hz
- Max. cable resistance: 50kΩ
- Max. current per MZC unit: 10mA
- Number of dimmers on MZC: 1-4
- Max. number of MZC in the wiring: limited to the fuse in the circuit
- Operating temperature: -5°C to 45°C
- Storage temperature: -30°C to 80°C
- Max. humidity: 90% (no condensation)
- Casing dimensions: 36x36x12 mm

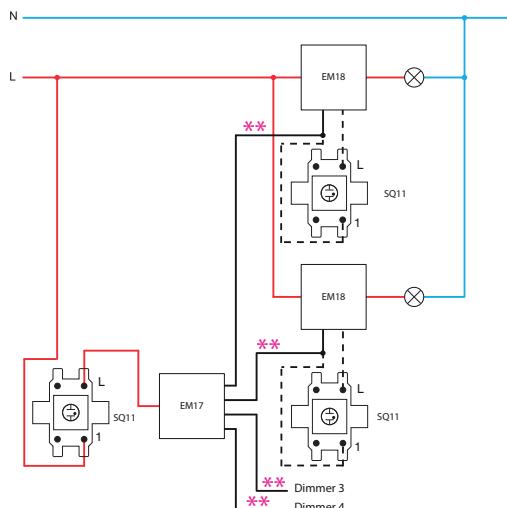

ZATEMNILNIK VGRADNI LED 250W

EM18

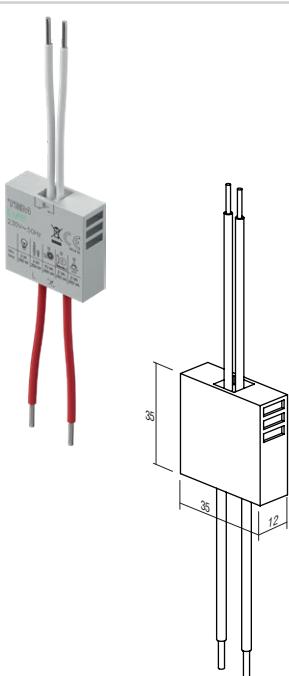


- vgradni, za vezavo s tipkalom
- za leading ali trailing edge
- napajanje 230 V~ 50 Hz
- možna vezava z več tipkali
- funkcija pomnenja zadnje nastavitev, razen v primeru izpada napetosti
- funkcija mehkega vklopa/izklopa
- nastavitev minimalne svetilnosti
- montaža samo ene naprave v eno dozo
- samo za notranjo uporabo
- ustreza EN 60669-1 in EN 60669-2-1



DIMMER INBOX LED 250W

- inbox, controlled by external push button
- for leading or trailing edge
- supply voltage 230V~ 50Hz
- several push-buttons combinations is possible
- memory function of the last setting, except in the case of a power failure
- soft start / stop function
- minimum intensity control
- only one dimmer per wall box
- only for indoor usage
- in accordance with EN 60669-1 and EN 60669-2-1

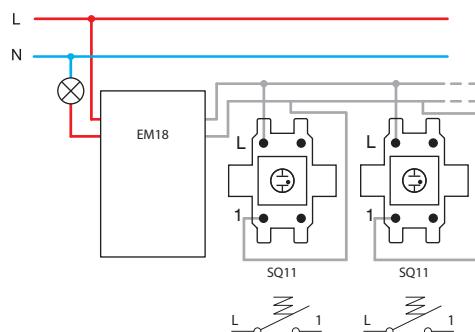

ZATEMNLNIK VGRADNI DC LED 96W



EM19



- vgradni, za vezavo s tipkalom
- vezava z vsemi LED napajalniki s konstantno napetostjo in nekaterimi LED napajalniki s konstantnim tokom, 9 – 48V DC, max 96W (tudi za LED trakove)
- ni za uporabo z induktivnimi bremenji
- možna vezava z več tipkali in več zatemnilnikov
- funkcija pomnenja zadnje nastavitev, razen v primeru izpada napetosti
- funkcija mehkega vklopa / izklopa
- montaža samo ene naprave v eno dozo
- samo za notranjo uporabo

DIMMER INBOX DC LED 96W


- inbox, controlled by external push button
- for use with constant voltage LED drivers and some constant current LED drivers, 9-48V DC, max 96W (also for LED strips)
- not for use with inductive loads
- several push-buttons combinations and several dimmers is possible
- memory function of the last setting, except in the case of a power failure
- soft start / stop function
- only one dimmer per wall box
- only for indoor usage

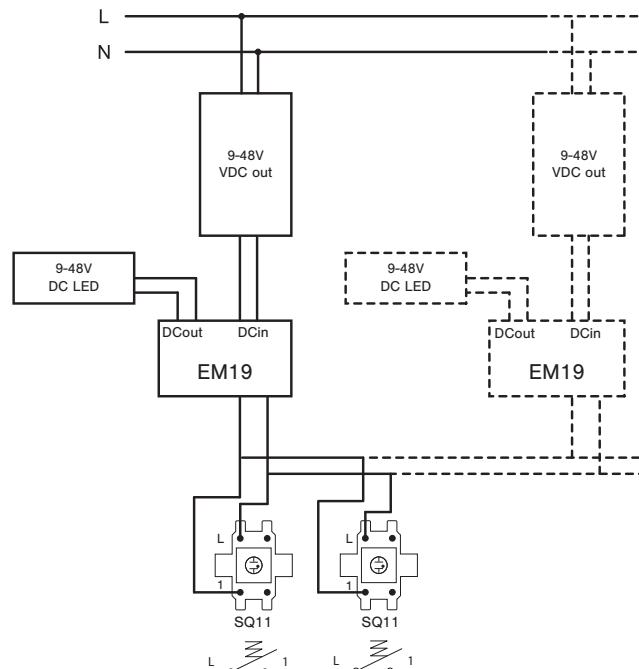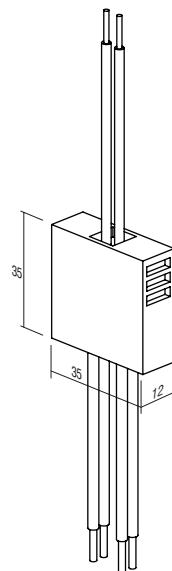**POZOR!**


V primeru montaže več zatemnilnih stikal v isto dozo se za vsako dodatno zatemnilno stikalo zmanjša maksimalna skupna moč za 10%.

ATTENTION!

If more dimmers are connected in one box reduce maximum common power for 10% for each dimmer.



EM18 (2÷250VA)

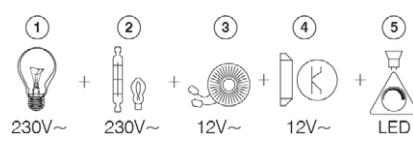

1 - žarnica z žarilno nitko /
incandescent lamp
2 - halogenska žarnica /
halogen lamp

3 - klasični transformator /
classical transformer

4 - zatemnilni elektronski transformator /
dimmable electronic transformer

5 - zatemnilna LED sijalka /
dimmable LED lamp




- EQ32PWXO
- EQ32TIKO
- EQ32ATXO
- EQ32BKXO




IR STIKALO 5A 230V~

- IR infrardeče stikalo
- napajanje: 230V~ ±10 % 50Hz
- rele: 5A / 250V~ zero crossing
- stopnja varnosti: IP40
- presek žič pri stičniku: 0,75 - 2,5 mm²
- kot zaznavanja: do 110° pri 20°C
- območje zaznavanja: približno 8 m pri 20°C
- nastavljivost trajanja: od približno 5 s do 12 min
- nastavljivost osvetlitve: od približno 5 do 200 LUX
- temperatura delovanja: od 0°C do +40°C
- ni primeren za vgradnjo v doze, globine 45 mm
- samo za notranjo uporabo

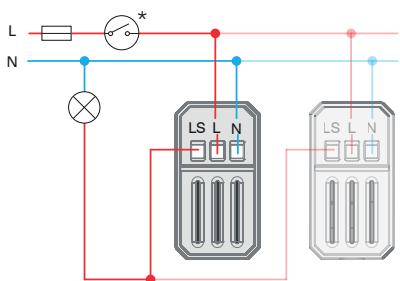

IR SWITCH 5A 230V~


- IR infrared switch
- supply voltage: 230V~ ±10 % 50Hz
- relay: 5A / 250V~ output for limited current with high resistance for zero crossing
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm²
- detection angle: up to 110° at 20°C
- detection area: approx. 8 m at 20°C
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from 0°C to +40°C
- not suitable for installation in 45 mm deep boxes
- only for indoor usage



- EQ35PWXO
- EQ35TIKO
- EQ35ATXO
- EQ35BKXO


TERMOSTAT OGREVANJE 10A 230V~

- način delovanja: ogrevanje
- napajanje: 230 V~, 50 Hz
- izhod: 4 A (max. 10 A), 230 V~, 50 Hz
- izhodni priključek: NO (max. 10 aktuatorjev)
- območje regulacije: +5 °C do +30 °C
- histerezis: 0,5 K
- zaščita: IP30
- vrsta tipala: bimetal
- vrsta električnega priključka: vzmetni kontakti
- vrsta vodnikov: 0,75 – 1,5mm² (mehko-žilni) ali 1,0 – 2,5 mm² (trdo-žilni)

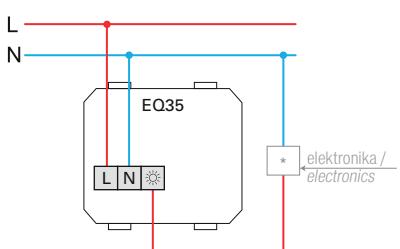

THERMOSTAT HEATING 10A 230V~


- operation mode: heating
- power supply: 230 V~, 50 Hz
- output: 4 A (max. 10 A), 230 V~, 50 Hz
- switching contact: NC (max. 10 actuators)
- regulation range: +5 °C to +30 °C
- hysteresis: 0,5 K
- protection: IP30
- sensor type: bimetal
- type of electrical connection: spring-loaded contacts
- type of conductors: 0,75 – 1,5mm² (flexible-stranded core) or 1,0 – 2,5 mm² (solid core)



- EQ36PWXO
- EQ36TIKO
- EQ36ATXO
- EQ36BKXO

TERMOSTAT OGREVANJE / HLAJENJE 5A 230V~

- način delovanja: ogrevanje / hlajenje
- napajanje: 230 V~, 50 Hz
- izhod: 2 A (max. 5 A), 230 V~, 50 Hz
- izhodni priključek: preklopno stikalo (max. 5 aktuatorjev)
- območje regulacije: +5 °C do +30 °C
- histerezis: 0,5 K
- zaščita: IP30
- vrsta tipala: bimetal
- vrsta električnega priključka: vzmetni kontakti
- vrsta vodnikov: 0,75 – 1,5mm² (mehko-žilni) ali 1,0 – 2,5 mm² (trdo-žilni)

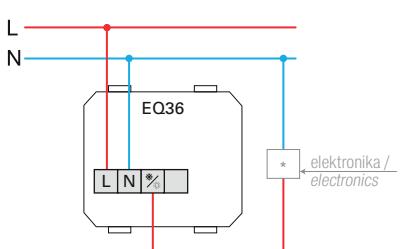

THERMOSTAT HEATING / COOLING 5A 230V~


- operation mode: heating / cooling
- power supply: 230 V~, 50 Hz
- output: 2 A (max. 5 A), 230 V~, 50 Hz
- switching contact: changeover switch (toggler, max. 5 actuators)
- regulation range: +5 °C to +30 °C
- hysteresis: 0,5 K
- protection: IP30
- sensor type: bimetal
- type of electrical connection: spring-loaded contacts
- type of conductors: 0,75 – 1,5mm² (flexible-stranded core) or 1,0 – 2,5 mm² (solid core)



EQ37PWXO
 EQ37TIKO
 EQ37ATXO
 EQ37BKXO


TERMOSTAT TALNO OGREVANJE 16A 230V~

- način delovanja: talno ogrevanje
- napajanje: 230 V~, 50 Hz
- izhod: 2 A (max. 16 A), 230 V~, 50 Hz
- območje regulacije: +10 °C do +50 °C
- histerezis: 1 K
- zaščita: IP30
- vrsta tipala: NTC v skladu z DIN EN 60730-2-1
- indikatorji:
- rdeča LED za ogrevanje in
zelena LED za nočni zmanjšani način
- vrsta električnega priključka: vijačni kontakti
- vrsta vodnikov: 0,5 – 2,5 mm²

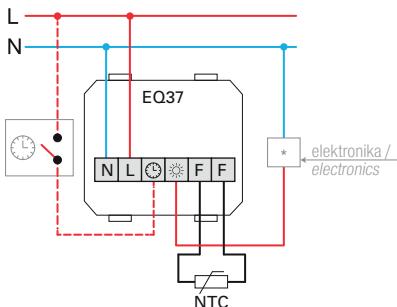

THERMOSTAT FLOOR HEATING 16A 230V~

- operation mode: floor heating
- power supply: 230 V~, 50 Hz
- output: 2 A (max. 16 A), 230 V~, 50 Hz
- regulation range: +10 °C to +50 °C
- hysteresis: 1 K
- protection: IP30
- sensor type: NTC in compliance with DIN EN 60730-2-1
- indicators: Red LED for heating and green LED for night decrease mode
- type of electrical connection: Screw contacts
- type of conductors: 0,5 – 2,5mm²



EQ01PWXO

PODOMETNI RADIO + ZVOČNIK DAB BLUETOOTH

- napajanje: 230 V~/ 50 Hz
- poraba energije med običajnim delovanjem: max. 6 W
- poraba energije v stanju pripravljenosti: < 0.5 W
- razred zaščite: IP20
- frekvence sprejema: DAB/DAB+ 174,928–239,200 MHz FM: 87,5–108 MHz
- bluetooth: Različica V4.1, 2,402–2,480 GHz Razred 2, največ +4 dBm
- glasbeni izhod: 2 x 2 W RMS
- razširjen vhod: Za zunanje stikalo (vklop radia/pripravljenost)
- okoljski pogoji:
- relativna vlažnost: Delovanje: 10–75 % brez kondenzacije
skladiščenje: 5–90 %
- temperatura: Delovanje: 5 °C - 35 °C
skladiščenje: -20 °C - 60 °C



FLUSH MOUNTED RADIO + SPEAKER DAB BLUETOOTH

- power supply: 230 V~/ 50 Hz
- power consumption during normal operation: max. 6 W
- power consumption when on standby: < 0.5 W
- protection class: IP20
- reception frequencies: DAB/DAB+ 174,928 - 239,200 MHz FM: 87.5 - 108 MHz
- bluetooth: Version V4.1, 2.402-2.480 GHz Class 2, max. +4 dBm
- music output: 2 x 2W RMS
- extension input: For external switch (Switches radio on/ standby)
- ambient conditions
- relative humidity: Operation: 10 % - 75 % non-condensing
storage: 5 % - 90 %
- temperature: Operation: 5 °C - 35 °C
storage: -20 °C - 60 °C



EQ02PWXO


PODOMETNI ZVOČNIK

- razred zaščite: IP20
- glasbena moč: 2 W RMS
- okoljski pogoji:
- relativna vlažnost: Delovanje: 10–75 % brez kondenzacije
skladiščenje: 5–90 %
- temperatura: Delovanje: 5–35 °C
skladiščenje: -20 °C - 60 °C



FLUSH MOUNTED SPEAKER

- protection class: IP20
- music power: 2W RMS
- ambient conditions
- relative humidity: Operation: 10 % - 75 % non-condensing
storage: 5 % - 90 %
- temperature: Operation: 5 °C - 35 °C
storage: -20 °C - 60 °C

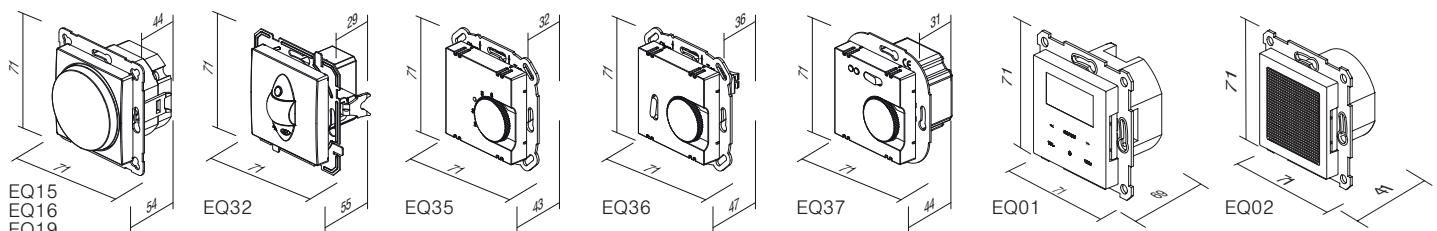



POLNILNIK USB PD 20W

- EQ69PWXO
- EQ69TIXO
- EQ69ATXO
- EQ69BKXO

- USB napajalnik z dovajanjem moči do 20W.
- za polnjenje elektronskih naprav prek standardnega USB priključka (kompatibilno tudi z Apple napravami)
- napajanje: 100-230 V~ 50/60 Hz
- poraba med delovanjem: 420 mA pri 100 V~/220 mA pri 230 V~
- poraba v mirovanju: <100 mW pri 230 V~
- izhodna moč: 20W Max
- Izhod:
- USB tip C: 5.0 VDC 3.0A; 9.0 VDC 2.2 A;
- 12.0 VDC 1.67 A (PD 20W)
- USB tip A: 5.0 VDC 3.0A; 9.0 VDC 2.0 A;
- 12.0 VDC 1.5 A (QC 18W)
- USB A+C: 5 VDC 3A
- tip konektorja: 1 x USB A; 1 x USB C
- povprečna učinkovitost v aktivnem stanju: 86 %
- učinkovitost pri minimalnemu bremenu (10%): 81%
- temperatura delovanja: 0 °C/+ 45 °C (notranja uporaba)
- IP zaščitni razred: IP20, samo za notranjo uporabo
- varnostni razred naprave II
- prenapetostna zaščita (EN 60364-4-44): razred III
- vijačna pritrditev vodnikov max. 2.5 mm²
- naprava z odmikom kontaktov min. 3 mm
- ni primeren za vgradnjo in doze globine 45 mm in ohišja CUBO IP20

Ustreza:

Direktivam: BT, EMC, RoHS, ErP

Standardim: EN IEC 62368-1, EN 55032, EN55035, EN IEC 61000-3-2, EN 61000-3-3, EN 50563, EN IEC 63000

Dodatnim regulativam: (EU) n. 2019/1782 REACH, n. 1907/2006 – art.33.

Prodot lahko vsebuje sledi svinca.



USB POWER SUPPLY UNIT PD 20W

- 20 W USB power delivery power supply unit
- for charging of electronic devices via a standard USB port (also compatible with Apple devices)
- power supply: 100-230V~ 50/60Hz
- power consumption: 420mA at 100V~/220mA at 230V~
- standby power consumption: <100mW at 230V~
- Output power: 20 W Max
- Output:
- USB tip C: 5.0 VDC 3.0A; 9.0 VDC 2.2 A; 12.0 VDC 1.67 A (PD 20W)
- USB tip A: 5.0 VDC 3.0A; 9.0 VDC 2.0 A; 12.0 VDC 1.5 A (QC 18W)
- USB A+C: 5 VDC 3A
- connector type: 1x USB A; 1x USB C
- average efficiency in active mode: 86%
- efficiency with low load (10%): 81%
- operating temperature: 0 °C/+45 °C (indoor use)
- IP protection class: IP20, indoor use only
- class device II
- overvoltage category (EN 60364-4-44): Class III
- screw contacts: max. 2.5 mm²
- device with a contact gap of at least 3mm


Conformity:


Directive: BT, EMC, RoHS, ErP

Standards: EN IEC 62368-1, EN 55032, EN55035, EN IEC 61000-3-2, EN 61000-3-3, EN 50563, EN IEC 63000

External power supplies regulation: (EU) n. 2019/1782 REACH, n. 1907/2006

- art.33.The product may contain traces of lead.





PQ10

PW


XO

tip type	naziv description	barva colour	opcijski opis 1 optional data 1
PQ10	POLNILO <i>BLANK</i>	<input type="checkbox"/> PW bela - sijaj <i>polar white</i>	XO brez okvirja <i>without cover plate</i>
PQ30	POKROV TAE/TDO <i>COVER TAE/TDO</i>	<input type="checkbox"/> TI titan <i>titanium</i> <input checked="" type="checkbox"/> AT antracit <i>anthracite</i> <input checked="" type="checkbox"/> BK črna <i>black</i>	




POLNILO

- PQ10PWXO
 - PQ10TIKO
 - PQ10ATXO
 - PQ10BKXO
- za pokrivanje praznih odprtin
BLANK
- for filling up empty spaces




POKROV TAE/TDO


- PQ30PW
 - PQ30TI
 - PQ30AT
 - PQ30BK
- TAE ali TDO pokrov z vijakom
COVER TAE/TDO
- TAE or TDO cover with screw



PQ10



PQ30




PQ20PWF

OHIŠJE NADOMETNO 1

- nadometno ohišje FLAT

SURFACE MOUNT BOX 1

- *surface mounting box FLAT*



PQ21PWF

OHIŠJE NADOMETNO ZA DVOJNO VTIČNICO

- nadometno ohišje FLAT

SURFACE MOUNT BOX FOR DOUBLE SOCKET

- *surface mounting box FLAT*





- PQ22PWF
 PQ22TIF
 PQ22ATF
 PQ22BKF

SET ZA STIKALA FLAT IP44

- za vgradnjo v vlažne prostore
- IP44 zaščito zagotavlja za stikala LOGIQ (SQ10, SQ11, SQ22, SQ60, SQ70)
- stikala in tipke niso sestavni del seta
- okvir FLAT
- ustreza IEC 60669-1



SET SWITCHES FLAT IP44

- for usage in humid areas
- IP44 protection provides for LOGIQ switches (SQ10, SQ11, SQ22, SQ60, SQ70)
- switches and buttons are not part of the set
- FLAT cover plate
- in accordance with IEC 60669-1



- PQ23PWF
 PQ23TIF
 PQ23ATF
 PQ23BKF


SET ZA VTIČNICE FLAT IP44

- za vgradnjo v vlažne prostore
- IP44 zaščito zagotavlja le v kombinaciji z vtičnico s pokrovom (VQ11XO, VQ13XO, VQ41XO, VQ43XO)
- vtičnice niso sestavni del seta
- okvir FLAT
- ustreza IEC 60884-1




SOCKETS FLAT IP44

- for usage in humid areas
- IP44 protection can be achieved only in combination with covered socket (VQ11XO, VQ13XO, VQ41XO, VQ43XO)
- sockets are not part of the set
- FLAT cover plate
- in accordance with IEC 60884-1



OF10

PW

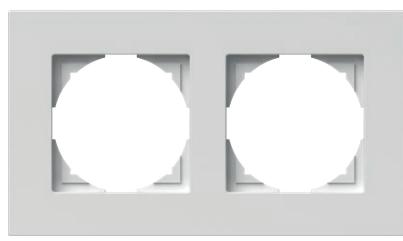

tip
type

OF10 OKVIR FLAT 1
COVER PLATE FLAT 1
OF20 OKVIR FLAT 2
COVER PLATE FLAT 2
OF30 OKVIR FLAT 3
COVER PLATE FLAT 3
. . .

naziv
description

barva
colour


	PW	bela - sijaj polar white
	TI	titan titanium
	AT	antracit anthracite
	BK	črna black



	OF10PW
	OF10TI
	OF10AT
	OF10BK

OKVIR FLAT 1


- dekorativni 1-mestni okvir
- ustreza EN 60669-1
COVER PLATE FLAT 1
- decorative cover plate 1-gang
- in accordance with EN 60669-1



	OF20PW
	OF20TI
	OF20AT
	OF20BK

OKVIR FLAT 2

- dekorativni 2-mestni okvir
- ustreza EN 60669-1
COVER PLATE FLAT 2
- decorative cover plate 2-gang
- in accordance with EN 60669-1



C O V E R P L A T E S F L A T O F

OKVIR FLAT 3




OF30PW
OF30TI
OF30AT
OF30BK

- dekorativni 3-mestni okvir
- ustreza EN 60669-1

COVER PLATE FLAT 3

- decorative cover plate 3-gang
- in accordance with EN 60669-1



OKVIR FLAT 4




OF40PW
OF40TI
OF40AT
OF40BK

- dekorativni 4-mestni okvir
- ustreza EN 60669-1

COVER PLATE FLAT 4

- decorative cover plate 4-gang
- in accordance with EN 60669-1



OKVIR FLAT 5





OF50PW
OF50TI
OF50AT
OF50BK

- dekorativni 5-mestni okvir
- ustreza EN 60669-1

COVER PLATE FLAT 5

- decorative cover plate 5-gang
- in accordance with EN 60669-1

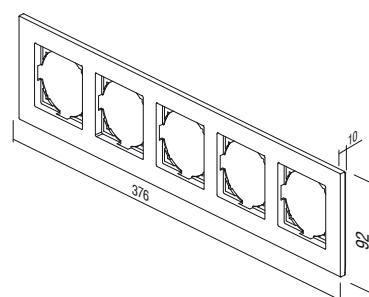



OQ10



PW


tip type	naziv description	barva colour
OQ10	OKVIR BOLD 1 COVER PLATE BOLD 1	PW bela - sijaj polar white
OQ20	OKVIR BOLD 2 COVER PLATE BOLD 2	TI titan titanium
OQ30	OKVIR BOLD 3 COVER PLATE BOLD 3	AT antracit anthracite
.	.	BK črna black



- | | |
|---|--------|
| ■ | OQ10PW |
| ■ | OQ10TI |
| ■ | OQ10AT |
| ■ | OQ10BK |

OKVIR BOLD 1


- dekorativni 1-mestni okvir
 - ustreza EN 60669-1
- COVER PLATE BOLD 1**
- decorative cover plate 1-gang
- in accordance with EN 60669-1



- | | |
|---|--------|
| ■ | OQ20PW |
| ■ | OQ20TI |
| ■ | OQ20AT |
| ■ | OQ20BK |

OKVIR BOLD 2

- dekorativni 2-mestni okvir
 - ustreza EN 60669-1
- COVER PLATE BOLD 2**
- decorative cover plate 2-gang
- in accordance with EN 60669-1



C O V E R P L A T E S B O L D O Q




OQ30PW
OQ30TI
OQ30AT
OQ30BK

OKVIR BOLD 3

- dekorativni 3-mestni okvir
- ustreza EN 60669-1

COVER PLATE BOLD 3

- decorative cover plate 3-gang
- in accordance with EN 60669-1




OQ40PW
OQ40TI
OQ40AT
OQ40BK

OKVIR BOLD 4

- dekorativni 4-mestni okvir
- ustreza EN 60669-1

COVER PLATE BOLD 4

- decorative cover plate 4-gang
- in accordance with EN 60669-1

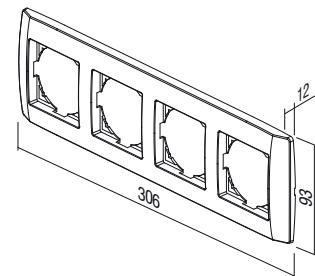


OQ50PW
OQ50TI
OQ50AT
OQ50BK


OKVIR BOLD 5

- dekorativni 5-mestni okvir
- ustreza EN 60669-1


COVER PLATE BOLD 5

- decorative cover plate 5-gang
- in accordance with EN 60669-1

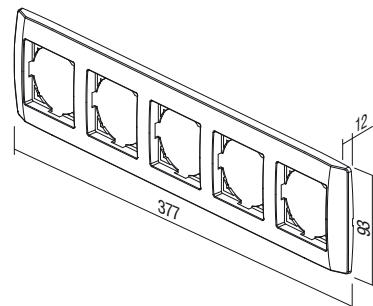



OR10

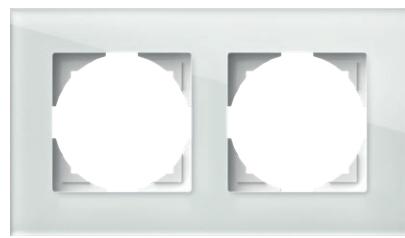

PW

tip
type

	naziv <i>description</i>	barva <i>colour</i>
OR10	OKVIR PRIME 1 COVER PLATE PRIME 1	GL bela <i>glass light</i>
OR20	OKVIR PRIME 2 COVER PLATE PRIME 2	GD črna <i>glass dark</i>
OR30	OKVIR PRIME 3 COVER PLATE PRIME 3	
.	.	
.	.	

GL bela
glass light


GD črna
glass dark



OR10GL
OR10GD

OKVIR PRIME 1


- dekorativni 1-mestni okvir
 - ustreza EN 60669-1
- COVER PLATE PRIME 1**
- decorative cover plate 1-gang
 - in accordance with EN 60669-1



OR20GL
OR20GD

OKVIR PRIME 2

- dekorativni 2-mestni okvir
 - ustreza EN 60669-1
- COVER PLATE PRIME 2**
- decorative cover plate 2-gang
 - in accordance with EN 60669-1



C O V E R P L A T E S P R I M E O R


OKVIR PRIME 3

OR30GL
OR30GD

- dekorativni 3-mestni okvir
- ustreza EN 60669-1

COVER PLATE PRIME 3

- decorative cover plate 3-gang
- in accordance with EN 60669-1




OKVIR PRIME 4

OR40GL
OR40GD

- dekorativni 4-mestni okvir
- ustreza EN 60669-1

COVER PLATE PRIME 4

- decorative cover plate 4-gang
- in accordance with EN 60669-1



TEM

ekonomik





Ekonomik

NAČRTOVANO ZA ODLIČNOST *Bistven je slog*

Nevtralen, kompakten, eleganten dizajn se prilagodi v vsako okolje, v katerem bivate ali delate. V interierju ne izstopa, temveč z njim harmonično zaživi.

PLANNED FOR EXCELLENCE Style is essential

A neutral, compact, elegant design is adjustable to every working or living area. It does not stick out from the interior, but rather harmonically fits into it.





Ekonomik

HARMONIJA BARV Izberi svoj odtenek

Želje so različne. Zato smo za vas pozorno izbrali možnosti, ki vam nudijo pravi odgovor. Nevtralna paleta barv bo le dopolnila vaš ambient - ne bo vas omejevala.

HARMONY OF COLOURS Choose your hue

Desires can be very different. Therefore we have carefully selected possibilities for you, which can offer you the right answer. A neutral palette of colours will only complement your ambient - it will not restrict it.

<input type="checkbox"/> PW	bela-sijaj	<i>polar white</i>
<input type="checkbox"/> IW	bež-sijaj	<i>ivory white</i>
<input type="checkbox"/> ES	srebrna-mat	<i>elox silver</i>
<input type="checkbox"/> CO	beli duroplast	<i>white thermoset</i>
<input checked="" type="checkbox"/> NB	črna sijaj	<i>night black</i>






PREPROSTO ZA NAJZAHTEVNEJŠE

S skrbnim načrtovanjem smo poskrbeli, da so elementi pod napetostjo zaščiteni pred dotikom. Osnovno pritrjevanje mehanizmov s krempeljci (1) lahko dodatno utrdite z vijaki (2). Ta način je še posebej primeren za varno in zanesljivo pritrditev vtičnice.

SIMPLE FOR THE MOST DEMANDING

By careful planning elements under voltage have been protected against touching. Basic fixing of mechanisms with fixing claws (1) allows additional strengthening with screws (2). This manner is especially appropriate for safe and reliable fixing of sockets.

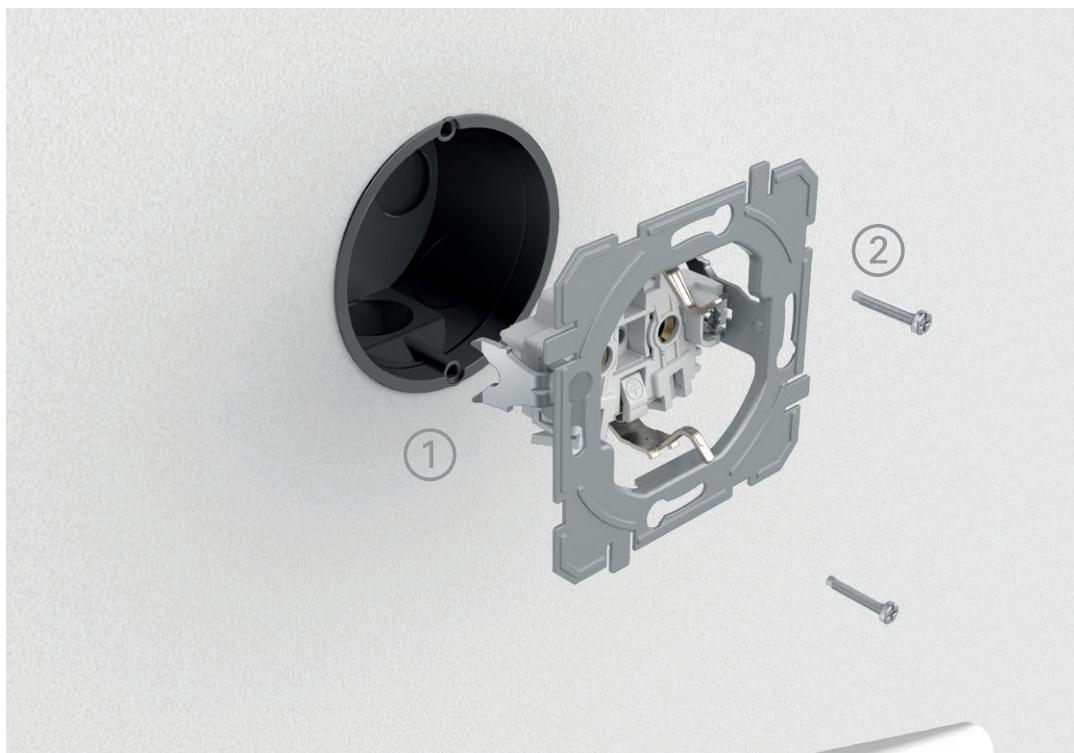

KOMBINIRAJTE KOT SAMI ŽELITE.

COMBINE AS YOU PLEASE.



S sestavljanjem prihranite prostor na steni.
Ko imate malo prostora, je navpično prava
odločitev.


With combining you save space on the wall.
When faced with a limited space, »vertically«
is the right decision.

ENOSTAVNA MONTAŽA

Ekonomik je rešitev za sistem standardnih okroglih doz. Z njim lahko načrtujete tako enostavne kot tudi zahtevnejše inštalacije, novogradnje in adaptacije. Sistem odlikujejo brezvijačni kontakti, ki vam prihranijo čas pri vgradnji elementov.

EASY INSTALLATION

Ekonomik is a solution for the system of standardized round installations boxes. It can be used for simple as well as more demanding installations, new buildings and adaptations. The system is characterised by plug-in contacts which save time during installation of elements.

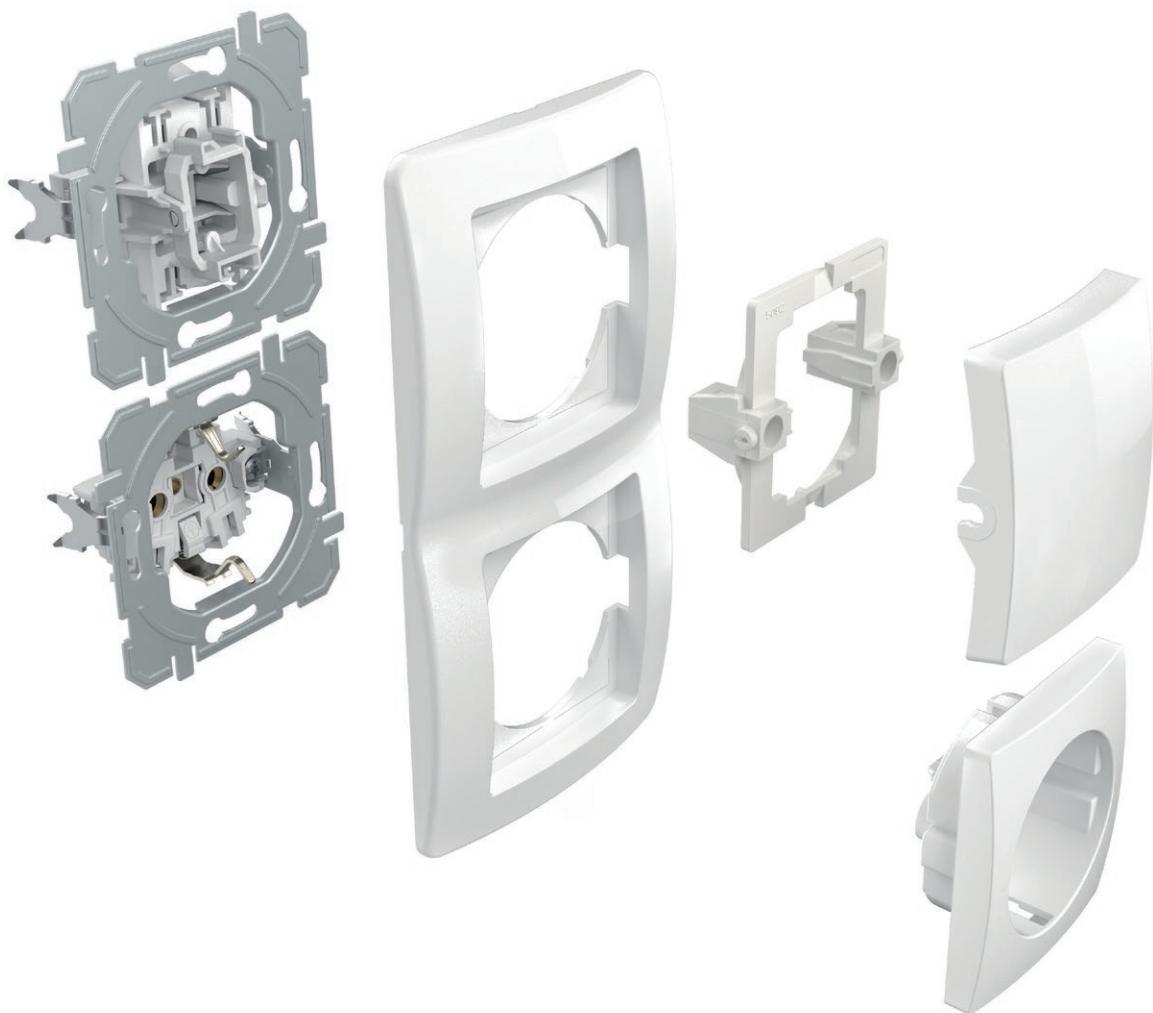

DOBRO JE VEDETI

GOOD TO KNOW



Vse vtičnice imajo vgrajeno varovalo pred dotikom elementov pod napetostjo.

All the sockets are equipped with a safety shutters assuring the protection to live contacts.



Dobro premišljena konstrukcija stikala omogoča enostavno indikacijo tudi naknadno.

The well-thought-out design of the switch enables the easy integration of the indication, including at a later time.



Za zanesljivost preklopa skrbijo kontakti iz srebreve zlitine.

Contacts made of silver alloy guarantee safe switching.



Brezvijačni kontakti omogočajo hitro in zanesljivo priključitev vodnikov. Na isti kontakt lahko pritrdite dva vodnika različnih premerov.

Plug-in contacts enable quick and reliable attachment of wires. Two wires of different diameters can be attached to the same contact.




Krempeljci omogočajo globljo pritrditev (tudi preko keramičnih ploščic ipd.).

Fixing claws enable deeper fixing (also through ceramic tiles, etc.)



Sestavljive doze vam bodo olajšale delo. Prave razdalje so vam zagotovljene.

Easy-fitting installation boxes will make your work easier. Proper lengths are guaranteed.

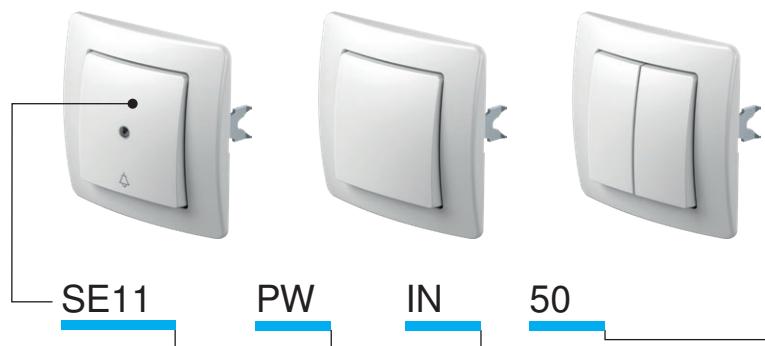

tip type	naziv description	tehnični opis technical data	barva colour	opcijski opis 1 optional data 1	opcijski opis 2 optional data 2
SE10	STIKALO ENOPOLNO SWITCH 1WAY	10AX 250V~	<input type="checkbox"/> PW bela-sijaj polar white	NT nevtral neutral	 50
SE11	TIPKALO ENOPOLNO PUSH BUTTON 1WAY	10A 250V~	<input checked="" type="checkbox"/> IW bež-sijaj ivory white		 51
SE22	STIKALO DVOPOLNO SWITCH 2POLE	16AX 250V~	<input type="checkbox"/> ES srebrna-mat elox silver	IN indikator indicator	 03
.	.	.	<input type="checkbox"/> CO beli duroplast white thermoset		 04
.	.	.	<input checked="" type="checkbox"/> NB črna-sijaj night black		.


STIKALO ENOPOLNO 10AX 250V~




SE10

- 10AX 250V~, tip SE10
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²


SWITCH 1WAY 10AX 250V~



- 10AX 250V~, type SE10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²




TIPKALO ENOPOLNO 10A 250V~




SE11

- 10A 250V~, tip SE11
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²

PUSH BUTTON 1WAY 10A 250V~



- 10A 250V~, type SE11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²




STIKALO DVOPOLNO 16AX 250V~




SE22

- 16AX 250V~, tip SE22
- ustreza EN 60669-1
- vijačna pritridlev vodnikov 1.5-2.5mm²
- samo v kombinaciji s tipko TE10_NT03

SWITCH 2POLE 16AX 250V~



- 16AX 250V~, type SE22
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm²
- only in combination with button TE10_NT03




STIKALO SERIJSKO 10AX 250V~




SE50

- 10AX 250V~, tip SE50
- ustreza EN 60669-1
- brezvijačna pritridlev vodnikov 1.5-2.5mm²

SWITCH 2GANG-1WAY 10AX 250V~



- 10AX 250V~, type SE50
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²





S W I T C H E S S E



SE51



TIPKALO SERIJSKO 10A 250V~

- 10A 250V~, tip SE51
- ustreza EN 60669-1
- brezvijačna pritrdirtev vodnikov 1.5-2.5mm²
- PUSH BUTTON 2GANG-1WAY 10A 250V~**
- 10A 250V~, type SE51
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²





SE52

- 10AX 250V~, tip SE52
- ustreza EN 60669-1
- brezvijačna pritrdirtev vodnikov 1.5-2.5mm²
- z mehansko blokado hkratnega vklopa






SE53

- 10A 250V~, tip SE53
- ustreza EN 60669-1
- brezvijačna pritrdirtev vodnikov 1.5-2.5mm²
- z mehansko blokado hkratnega vklopa
- PUSH BUTTON SHUTTERS 10A 250V~**
- 10A 250V~, type SE53
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²
- with mechanical interlock






SE60

- 10AX 250V~, tip SE60
- ustreza EN 60669-1
- brezvijačna pritrdirtev vodnikov 1.5-2.5mm²
- SWITCH 2WAY 10AX 250V~**
- 10AX 250V~, type SE60
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²




SE63

- 10AX 250V~, tip SE63
- ustreza EN 60669-1
- brezvijačna pritrdirtev vodnikov 1.5-2.5mm²
- SWITCH DOUBLE 2WAY 10AX 250V~**
- 10AX 250V~, type SE63
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²



SE70

- 10AX 250V~, tip SE70
- ustreza EN 60669-1
- brezvijačna pritrdirtev vodnikov 1.5-2.5mm²
- SWITCH INTERMEDIATE 10AX 250V~**
- 10AX 250V~, type SE70
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²





- SE10PW
 SE10IW
 SE10ES
 SE10CO
 SE10NB

STIKALO ENOPOLNO 10AX 250V~

- 10AX 250V~, tip SE10
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
- SWITCH 1WAY 10AX 250V~**
- 10AX 250V~, type SE10
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



- SE10PWIN
 SE10WIN
 SE10ESIN
 SE10COIN
 SE10NBIN

STIKALO ENOPOLNO 10AX 250V~ _ IN

- IN indikator
 - 10AX 250V~, tip SE10
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
- SWITCH 1WAY 10AX 250V~ _ IN**
- IN indicator
 - 10AX 250V~, type SE10
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



- SE11PW
 SE11IW
 SE11ES
 SE11CO
 SE11NB

TIPKALO ENOPOLNO 10A 250V~

- 10A 250V~, tip SE11
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
- PUSH BUTTON 1WAY 10A 250V~**
- 10A 250V~, type SE11
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



- SE11PWTI50
 SE11WWTI50
 SE11ESTI50
 SE11COTI50
 SE11NBTTI50

TIPKALO ENOPOLNO 10A 250V~ _ TI 50

- TI 50 indikator zvonec+tlivka
 - 10A 250V~, tip SE11
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
- PUSH BUTTON 1WAY 10A 250V~ _ TI 50**
- TI 50 indicator bell+neon lamp
 - 10A 250V~, type SE11
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



- SE11PWTI51
 SE11WWTI51
 SE11ESTI51
 SE11COTI51
 SE11NBTTI51

TIPKALO ENOPOLNO 10A 250V~ _ TI 51

- TI 51 indikator luč+tlivka
 - 10A 250V~, tip SE11
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
- PUSH BUTTON 1WAY 10A 250V~ _ TI 51**
- TI 51 indicator light+neon lamp
 - 10A 250V~, type SE11
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



- SE11PWIL
 SE11WIL
 SE11ESIL
 SE11COIL
 SE11NBIL

TIPKALO ENOPOLNO 10A 250V~ _ IL

- IL napisna ploščica
 - 10A 250V~, tip SE11
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
- PUSH BUTTON 1WAY 10A 250V~ _ IL**
- IL inscription plate
 - 10A 250V~, type SE11
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



- SE22PWIN03
 SE22WIN03
 SE22ESIN03
 SE22NBIN03

STIKALO DVOPOLNO 16AX 250V~ _ IN 03

- IN 03 neutral 0-1
 - 16AX 250V~, tip SE22
 - ustreza EN 60669-1
 - vijačna pritridlev vodnikov 1.5-2.5mm²
- SWITCH 2POLE 16AX 250V~ _ IN 03**
- IN 03 neutral 0-1
 - 16AX 250V~, type SE22
 - in accordance with EN 60669-1
 - screw contacts 1.5-2.5mm²



S W I T C H E S S E



- SE50PW
- SE50IW
- SE50ES
- SE50CO
- SE50NB

STIKALO SERIJSKO 10AX 250V~

- 10AX 250V~, tip SE50
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
- SWITCH 2GANG-1WAY 10AX 250V~**
- 10AX 250V~, type SE50
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



- SE51PW
- SE51IW
- SE51ES
- SE51CO
- SE51NB

TIPKALO SERIJSKO 10A 250V~

- 10A 250V~, tip SE51
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
- PUSH BUTTON 2GANG-1WAY 10A 250V~**
- 10A 250V~, type SE51
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



- SE52PWNT09
- SE52IWNT09
- SE52ESNT09
- SE52CONT09
- SE52NBNT09

STIKALO ŽALUZIJSKO 10AX 250V~ __ NT 09

- NT 09 nevral gor-dol
 - 10AX 250V~, tip SE52
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
 - z mehansko blokado hkratnega vklopa
- SWITCH SHUTTERS 10AX 250V~ __ NT 09**
- NT 09 neutral up-down
 - 10AX 250V~, type SE52
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²
 - with mechanical interlock



- SE53PWNT09
- SE53IWNT09
- SE53ESNT09
- SE53CONT09
- SE53NBNT09

TIPKALO ŽALUZIJSKO 10A 250V~ __ NT 09

- NT 09 nevral gor-dol
 - 10A 250V~, tip SE53
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
 - z mehansko blokado hkratnega vklopa
- PUSH BUTTON SHUTTERS 10A 250V~ __ NT 09**
- NT 09 neutral up-down
 - 10A 250V~, type SE53
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²
 - with mechanical interlock



- SE60PW
- SE60IW
- SE60ES
- SE60CO
- SE60NB

STIKALO MENJALNO 10AX 250V~


- 10AX 250V~, tip SE60
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
- SWITCH 2WAY 10AX 250V~**
- 10AX 250V~, type SE60
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



- SE63PW
- SE63IW
- SE63ES
- SE63CO
- SE63NB

STIKALO DVOJNO MENJALNO 10AX 250V~



- 10AX 250V~, tip SE63
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
- SWITCH DOUBLE 2WAY 10AX 250V~**
- 10AX 250V~, type SE63
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²

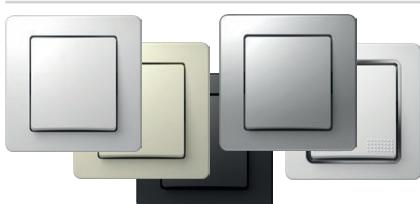




- SE70PW
- SE70IW
- SE70ES
- SE70CO
- SE70NB



STIKALO KRIŽNO 10AX 250V~


- 10AX 250V~, tip SE70
 - ustreza EN 60669-1
 - brezvijačna pritridlev vodnikov 1.5-2.5mm²
- SWITCH INTERMEDIATE 10AX 250V~**
- 10AX 250V~, type SE70
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²

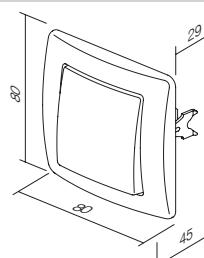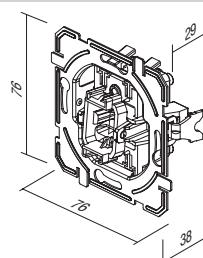

				
TE11	PW	NT	09	
tip type	naziv description	barva colour	opcijski opis 1 optional data 1	opcijski opis 2 optional data 2
TE10	TIPKA NAVADNA BUTTON 1GANG	<input type="checkbox"/> PW bela-sijaj polar white	NT nevtral neutral	 50
TE11	TIPKA SERIJSKA BUTTON 2GANG	<input checked="" type="checkbox"/> IW bež-sijaj ivory white		 51
.	.	<input type="checkbox"/> ES srebrna-mat elox silver	IN indikator indicator	0 03
.	.	<input type="checkbox"/> CO beli duroplost white thermoset		
		<input checked="" type="checkbox"/> NB črna-sijaj night black		 04

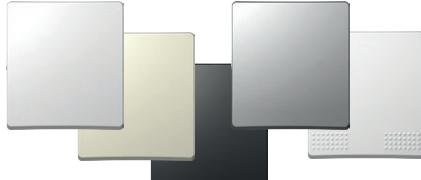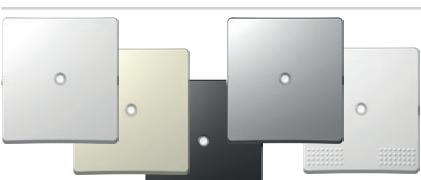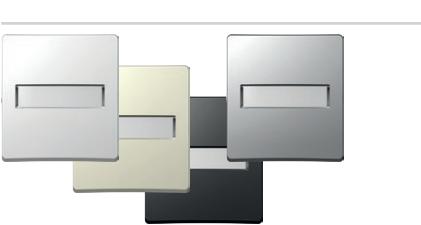TIPKA NAVADNA	
	<input type="checkbox"/> TE10PW <input checked="" type="checkbox"/> TE10IW <input type="checkbox"/> TE10ES <input type="checkbox"/> TE10CO <input checked="" type="checkbox"/> TE10NB
- tipka skupaj z nosilcem BUTTON 1GANG - button together with carrier	
	
TIPKA INDIKATOR	
	<input type="checkbox"/> TE10PWIN <input checked="" type="checkbox"/> TE10WIN <input type="checkbox"/> TE10ESIN <input type="checkbox"/> TE10COIN <input checked="" type="checkbox"/> TE10NBIN
- tipka skupaj z nosilcem BUTTON INDICATOR - button together with carrier	
	
TIPKA Z NAPISNO PLOŠČICO	
	<input type="checkbox"/> TE13PWIL <input checked="" type="checkbox"/> TE13IWIL <input type="checkbox"/> TE13ESIL <input checked="" type="checkbox"/> TE13NBIL
- tipka skupaj z nosilcem, z napisno ploščico BUTTON WITH INSCRIPTION PLATE - button together with carrier, with inscription plate	
	
TIPKA SERIJSKA	
	<input type="checkbox"/> TE11PW <input checked="" type="checkbox"/> TE11IW <input type="checkbox"/> TE11ES <input type="checkbox"/> TE11CO <input checked="" type="checkbox"/> TE11NB
- tipka serijska skupaj z nosilcem BUTTON 2GANG - button 2gang together with carrier	
	

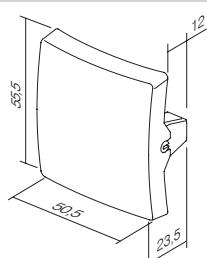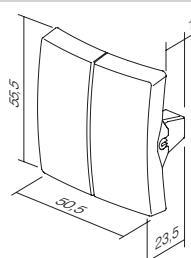

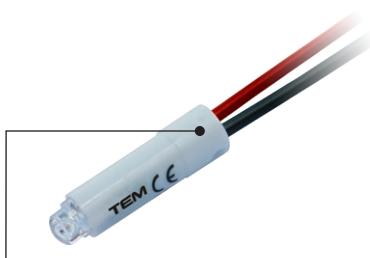

IA20 **WH**

tip type	naziv description	tehnični opis technical data	barva colour
IA10	TLIVKA NEON LAMP	230V~ 0,34W	<input type="checkbox"/> WH bela white
IA20	LED SIGNALIZACIJA LED SIGNALLING UNIT	230V~ 0,40W	<input checked="" type="checkbox"/> BL modra blue
IA21	LED SIGNALIZACIJA LED SIGNALLING UNIT	24V AC/DC 0,20W	<input checked="" type="checkbox"/> RD rdeča red
.	.	.	<input checked="" type="checkbox"/> GR zelena green
.	.	.	<input checked="" type="checkbox"/> OR oranžna orange



IA10OR

TLIVKA 230V~ 0,34W

- za indikacijo, signalizacijo
ali stalno signalizacijo stikala
- v kombinaciji s tipko z indikatorjem
- NEON LAMP 230V~ 0,34W**
- for indication, signalling
or permanent signalling
- in combination with a button featuring an indicator



IA20WH
 IA20GR
 IA20RD
 IA20BL

LED SIGNALIZACIJA 230V AC/DC 0,40W

- za indikacijo, signalizacijo
ali stalno signalizacijo stikala
- v kombinaciji s tipko z indikatorjem
- LED SIGNALIZACIJA 230V AC/DC 0,40W**
- for indication, signalling
or permanent signalling
- in combination with a button featuring an indicator



IA21WH
 IA21RD

LED SIGNALIZACIJA 24V AC/DC 0,20W

- za indikacijo, signalizacijo
ali stalno signalizacijo stikala
- v kombinaciji s tipko z indikatorjem
- LED SIGNALIZACIJA 24V AC/DC 0,20W**
- for indication, signalling
or permanent signalling
- in combination with a button featuring an indicator




IA22WH
 IA22RD

LED SIGNALIZACIJA 12V AC/DC 0,10W

- za indikacijo, signalizacijo
ali stalno signalizacijo stikala
- v kombinaciji s tipko z indikatorjem
- LED SIGNALIZACIJA 12V AC/DC 0,10W**
- for indication, signalling
or permanent signalling
- in combination with a button featuring an indicator

Indikacija / Indication	* Signalizacija / Signalization	Stalna signalizacija / Permanent signalling

* vezave niso primerne za varčne (CFL, LED) sijalke /
the connections are not suitable for energy-saving bulbs (CFL, LED)




S O C K E T S V E

VE11	PT	XO	KS
tip type	naziv description	tehnični opis technical data	opcijski opis 1 optional data 1
VE10	VTIČNICA SCHUKO SOCKET SCHUKO	2P+E 16A 250V~	XO brez okvirja without cover plate
VE11	VTIČNICA SCHUKO+POKROV SOCKET SCHUKO+COVER	2P+E 16A 250V~	KS vgrajena zaščita pred dotikom kontaktov shuttered live contacts
VE12	VTIČNICA SCHUKO SOCKET SCHUKO	2P+E 16A 250V~ BV	KS vgrajena zaščita pred dotikom kontaktov shuttered live contacts
.	.	.	
barva colour			
<input type="checkbox"/> PW bela-sijaj polar white	<input checked="" type="checkbox"/> PT bela+prozorna white+transparent	<input type="checkbox"/> PP bela+bela white+white	
<input checked="" type="checkbox"/> IW bež-sijaj ivory white	<input checked="" type="checkbox"/> IT bež+prozorna ivory+transparent	<input checked="" type="checkbox"/> II bež+bež ivory+ivory	
<input type="checkbox"/> ES srebrna-mat elox silver	<input checked="" type="checkbox"/> ST srebrna+prozorna silver+transparent	<input type="checkbox"/> SS srebrna+srebrna silver+silver	
<input type="checkbox"/> CO beli duroplast white thermoset	<input checked="" type="checkbox"/> CT bela+prozorna white+transparent	<input type="checkbox"/> BB črna-črna black+black	
<input checked="" type="checkbox"/> NB črna-sijaj night black	<input checked="" type="checkbox"/> BT črna+prozorna black+transparent	<input checked="" type="checkbox"/> RR rdeča+rdeča red+red	
<input type="checkbox"/> RD rdeča red	<input checked="" type="checkbox"/> RT rdeča+prozorna red+transparent	<input type="checkbox"/> GG zelena+zelena green+green	
<input type="checkbox"/> GR zelena green	<input checked="" type="checkbox"/> GT zelena+prozorna green+transparent	<input checked="" type="checkbox"/> OO oranžna+oranžna orange+orange	
<input type="checkbox"/> OR oranžna orange	<input checked="" type="checkbox"/> OT oranžna+prozorna orange+transparent		

schuko - ustreza EN 60884-1, CEE7 (list III)

schuko - in accordance with EN 60884-1, CEE7 (standard sheet III)

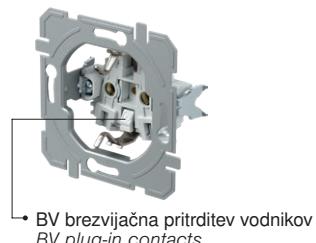

francoska - ustreza NF C 61-314 (list V)

French - in accordance with NF C 61-314 (standard sheet V)



VTIČNICA SCHUKO 2P+E 16A 250V~ __ XO



- VE10PWXO
 VE10IWXO
 VE10ESXO
 VE10COXO
 VE10NBXO
 VE10RDXO
 VE10GRXO
 VE10ORXO

SOCKET SCHUKO 2P+E 16A 250V~ __ XO

- vijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E schuko
- 16A 250V~, tip VE10



VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~ __ XO



- VE11PTXO
 VE11ITXO
 VE11STXO
 VE11BTXO

SOCKET SCHUKO+COVER 2P+E 16A 250V~ __ XO

- screw contacts 1.5-2.5mm²
- XO without surround
- 2P+E schuko+cover
- 16A 250V~, type VE11



VTIČNICA SCHUKO 2P+E 16A 250V~ BV __ XO



- VE12PWXO
 VE12IWXO
 VE12ESXO
 VE12COXO
 VE12NBXO
 VE12RDXO
 VE12GRXO
 VE12ORXO

SOCKET SCHUKO 2P+E 16A 250V~ BV __ XO

- BV brezvijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E schuko
- 16A 250V~, tip VE12



VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~ BV __ XO



- VE13PTXO
 VE13ITXO
 VE13STXO
 VE13BTXO
 VE13PPXO

SOCKET SCHUKO+COVER 2P+E 16A 250V~ BV __ XO

- BV plug-in contacts 1.5-2.5mm²
- XO without surround
- 2P+E schuko+cover
- 16A 250V~, type VE13



VTIČNICA SCHUKO 2P+E 16A 250V~



- VE10PW
 VE10IW
 VE10ES
 VE10CO
 VE10NB

SOCKET SCHUKO 2P+E 16A 250V~

- vijačna pritrditev vodnikov 1.5-2.5mm²
- 2P+E schuko
- 16A 250V~, tip VE10



VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~



- VE11PT
 VE11IT
 VE11ST
 VE11CT
 VE11BT

SOCKET SCHUKO+COVER 2P+E 16A 250V~

- screw contacts 1.5-2.5mm²
- 2P+E schuko+cover
- 16A 250V~, type VE11



VTIČNICA SCHUKO 2P+E 16A 250V~ BV



- VE12PW
 VE12IW
 VE12ES
 VE12CO
 VE12NB

SOCKET SCHUKO 2P+E 16A 250V~ BV

- BV brezvijačna pritrditev vodnikov 1.5-2.5mm²
- 2P+E schuko
- 16A 250V~, tip VE12



VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~ BV



- VE13PT
 VE13IT
 VE13ST
 VE13CT
 VE13BT

SOCKET SCHUKO+COVER 2P+E 16A 250V~ BV

- BV plug-in contacts 1.5-2.5mm²
- 2P+E schuko+cover
- 16A 250V~, type VE13



S O C K E T S V E



- VE40PWXO
- VE40IWXO
- VE40ESXO
- VE40COXO
- VE40NBXO
- VE40RDXO
- VE40GRXO
- VE40ORXO

VTIČNICA FRANCOSKA 2P+E 16A 250V~ XO


- vijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E francoska
- 16A 250V~, tip VE40



- VE41PTXO
- VE41ITXO
- VE41STXO
- VE41BTXO
- VE41PPXO

VTIČNICA FRANCOSKA+POKROV 2P+E 16A 250V~ XO

- vijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E francoska+pokrov
- 16A 250V~, tip VE41

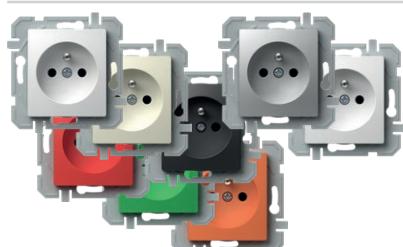

- VE42PWXO
- VE42IWXO
- VE42ESXO
- VE42COXO
- VE42NBXO
- VE42RDXO
- VE42GRXO
- VE42ORXO

VTIČNICA FRANCOSKA 2P+E 16A 250V~ BV XO

- BV brezvijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E francoska
- 16A 250V~, tip VE42



- VE43PTXO
- VE43ITXO
- VE43STXO
- VE43BTXO
- VE43PPXO

VTIČNICA FRANCOSKA+POKROV 2P+E 16A 250V~ BV XO

- BV brezvijačna pritrditev vodnikov 1.5-2.5mm²
- XO brez okvirja
- 2P+E francoska+pokrov
- 16A 250V~, tip VE43



- VE40PW
- VE40IW
- VE40ES
- VE40CO
- VE40NB

VTIČNICA FRANCOSKA 2P+E 16A 250V~

- vijačna pritrditev vodnikov 1.5-2.5mm²
- 2P+E francoska
- 16A 250V~, tip VE40



- VE41PT
- VE41IT
- VE41BT
- VE41ST

VTIČNICA FRANCOSKA+POKROV 2P+E 16A 250V~

- vijačna pritrditev vodnikov 1.5-2.5mm²
- 2P+E francoska+pokrov
- 16A 250V~, tip VE41



- VE42PW
- VE42IW
- VE42ES
- VE42CO
- VE42NB

VTIČNICA FRANCOSKA 2P+E 16A 250V~ BV

- BV brezvijačna pritrditev vodnikov 1.5-2.5mm²
- 2P+E francoska
- 16A 250V~, tip VE42



- VE43PT
- VE43IT
- VE43BT
- VE43ST

VTIČNICA FRANCOSKA+KS+POKROV 2P+E 16A 250V~ BV

- BV brezvijačna pritrditev vodnikov 1.5-2.5mm²
- 2P+E francoska+pokrov
- 16A 250V~, tip VE43





VTIČNICA SCHUKO DVOJNA 2P+E 16A 250V~

- VE16PWKS
- VE16WKS
- VE16ESKS
- VE16NBKS

- 2P+E schuko dvojna
- 16A 250V~, tip VE16
- ustreza IEC 60884-1, CEE7
- vijačna pritrditve vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov

SOCKET SCHUKO DOUBLE 2P+E 16A 250V~

- 2P+E schuko double
- 16A 250V~, type VE16
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm²
- shuttered live contacts




VTIČNICA FRANCOSKA DVOJNA 2P+E 16A 250V~

- VE46PWKS
- VE46WKS
- VE46ESKS
- VE46NBKS

- 2P+E francoska dvojna
- 16A 250V~, tip VE46
- ustreza IEC 60884-1, CEE7; NF C 61-314,
CSN 33 2318; PN-E 93201
- vijačna pritrditve vodnikov 1.5-2.5 mm²
- vgrajena zaščita pred dotikom kontaktov

SOCKET FRENCH DOUBLE 2P+E 16A 250V~

- 2P+E French double
- 16A 250V~, type VE46
- in accordance with IEC 60884-1, CEE7; NF C 61-314,
CSN 33 2318; PN-E 93201
- screw contacts 1.5-2.5 mm²
- shuttered live contacts

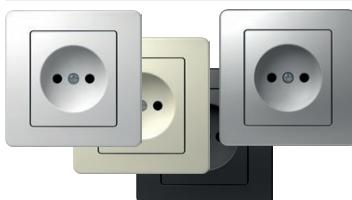


VTIČNICA 2P 16A 250V~


- VE30PW
- VE30IW
- VE30ES
- VE30NB

- 2P brez ozemljitvenega kontakta
- 16A 250V~
- ustreza EN 60884-1, CEE7 (list I)
- vijačna pritrditve vodnikov 1.5-2.5mm²

SOCKET 2P 16A 250V~

- 2P without earthing contact
- 16A 250V~
- in accordance with EN 60884-1, CEE7 (standard sheet I)
- screw contacts 1.5-2.5mm²

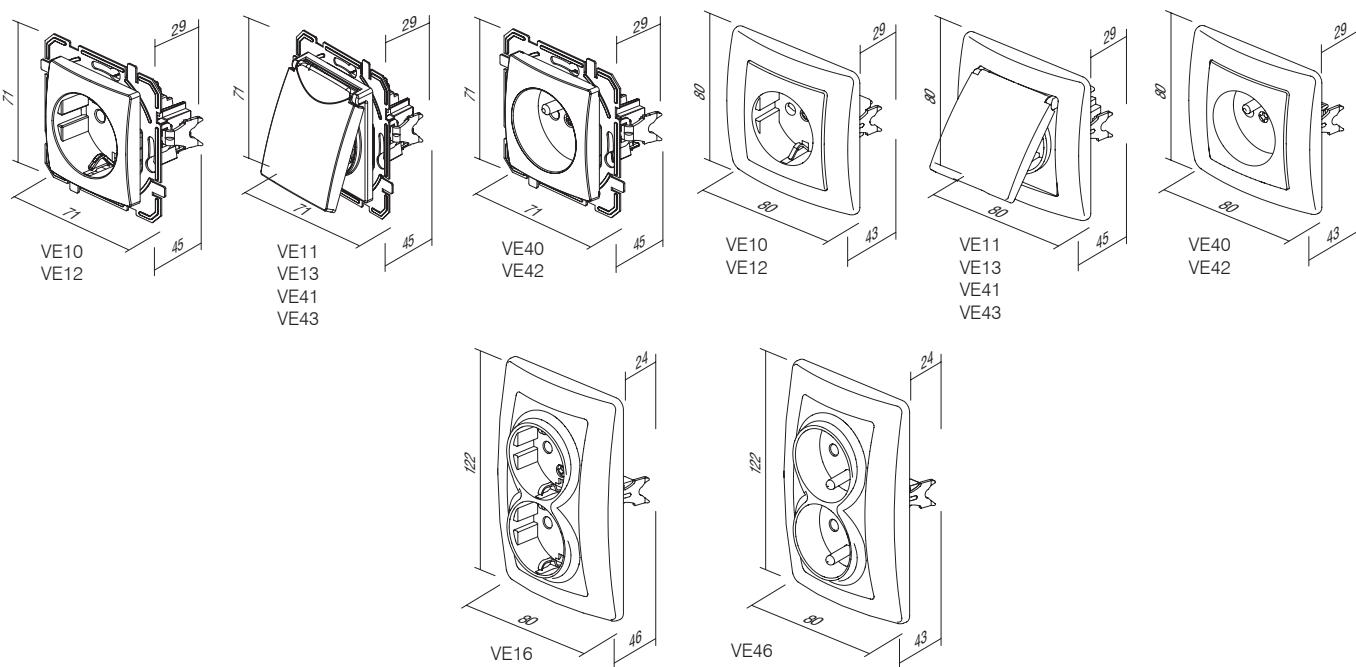

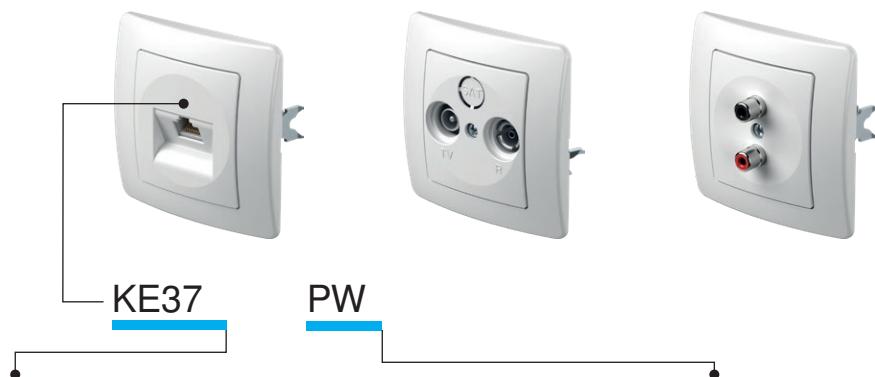

tip type	naziv description	tehnični opis technical data	barva colour
KE11	VTIČNICA TV-R KONČNA SOCKET TV-R END-LINE	1dB	<input type="checkbox"/> PW bela-sijaj polar white
KE12	VTIČNICA TV-R PREHODNA SOCKET TV-R THROUGHPASS	10dB	<input checked="" type="checkbox"/> IW bež-sijaj ivory white
KE16	VTIČNICA SAT-TV-R KONČNA SOCKET SAT-TV-R END-LINE	3dB	<input type="checkbox"/> ES srebrna-mat elox silver
.	.	.	<input type="checkbox"/> CO beli duroplast white thermoset
.	.	.	<input type="checkbox"/> NB črna-sijaj night black



KE11




VTIČNICA TV-R KONČNA 1dB


- TV-R končna
- frekvenčni pas 5÷862MHz
- dušenje: R-1.5dB, TV-1dB
- ustreza EN 50083-1
- vijačna priključitev

SOCKET TV-R END-LINE 1dB

- TV-R end-line
- frequency range 5÷862MHz
- reduction: R-1.5dB, TV-1dB
- in accordance with EN 50083-1
- screw contacts



KE12




VTIČNICA TV-R PREHODNA 10dB


- TV-R prehodna vtičnica
- frekvenčni pas 5÷862MHz
- dušenje: R-10dB, TV-10dB, prehod-2dB
- ustreza EN 50083-1
- vijačna priključitev

SOCKET TV-R THROUHPASS 10dB

- TV-R troughpass
- frequency range 5÷862MHz
- reduction: R-10dB, TV-10dB, trough-2dB
- in accordance with EN 50083-1
- screw contacts



KE16




VTIČNICA SAT-TV-R KONČNA 3dB

- SAT-TV-R končna
- frekvenčni pas 5÷2400MHz
- dušenje: R-1dB, TV-1.5dB, SAT-3dB
- vgradnja v dozo Ø60 s krempeljci ali vijaki
- ustreza EN 50083-1
- vijačna pritrditev vodnikov

SOCKET SAT-TV-R END-LINE 3dB

- SAT-TV-R end-line
- frequency range 5÷2400MHz
- reduction: R-1dB, TV-1.5dB, SAT-3dB
- for mounting in round box Ø60 with claws or screws
- in accordance with EN 50083-1
- screw contacts




KE36

- KS keystone pritrditveni standard
- RJ11 6/4
- ustreza IEC 60603-7

SOCKET TEL KS RJ11 6/4

- KS keystone fixing standard
- RJ11 6/4
- in accordance with IEC 60603-7






KE37

VTIČNICA CAT5e KS RJ45 8/8

- KS keystone prirditveni standard
- CAT5e, RJ45 8/8
- ustreza IEC 60603-7

SOCKET CAT5e KS RJ45 8/8

- KS keystone fixing standard
- CAT5e, RJ45 8/8
- in accordance with IEC 60603-7

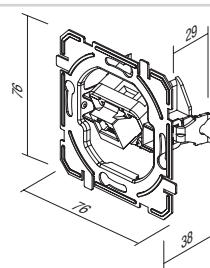


KE40

VTIČNICA CAT6s KS RJ45 8/8 SLIM

- KS keystone prirditveni standard
- CAT6s, RJ45 8/8
- ustreza IEC 60603-7

SOCKET CAT6s KS RJ45 8/8 SLIM

- KS keystone fixing standard
- CAT6s, RJ45 8/8
- in accordance with IEC 60603-7

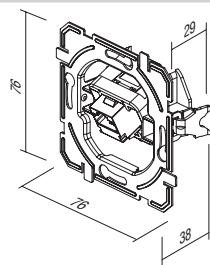


KE38

VTIČNICA TEL KS DVOJNA 2x RJ11 6/4

- KS keystone prirditveni standard
- 2x RJ11 6/4
- ustreza IEC 60603-7

SOCKET TEL KS DOUBLE 2x RJ11 6/4

- KS keystone fixing standard
- 2x RJ11 6/4
- in accordance with IEC 60603-7

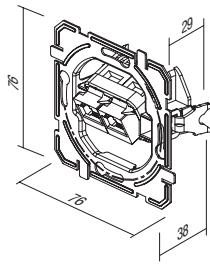


KE39

VTIČNICA CAT5e KS DVOJNA 2x RJ45 8/8

- KS keystone prirditveni standard
- 2x CAT5e, RJ45 8/8
- ustreza IEC 60603-7

SOCKET CAT5e KS DOUBLE 2x RJ45 8/8

- KS keystone fixing standard
- 2x CAT5e, RJ45 8/8
- in accordance with IEC 60603-7

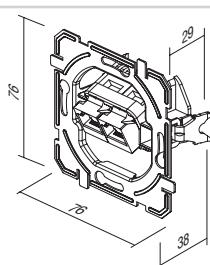


KE41

VTIČNICA CAT6s KS DVOJNA 2x RJ45 8/8 SLIM

- KS keystone prirditveni standard
- 2x CAT6s, RJ45 8/8
- ustreza IEC 60603-7

SOCKET CAT6s KS DOUBLE 2x RJ45 8/8 SLIM

- KS keystone fixing standard
- 2x CAT6s, RJ45 8/8
- in accordance with IEC 60603-7

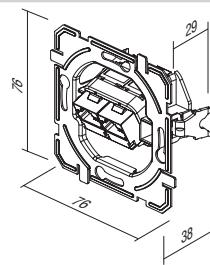


KE45

ADAPTER KS ENOJNI

- KS keystone prirditveni standard - enojni
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- komunikacijski modul ni vgrajen

ADAPTER KS SINGLE

- KS keystone fixing standard - single
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- communication module not included

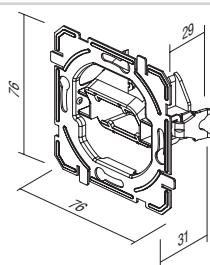




KE46

ADAPTER KS DVOJNI

- KS keystone pritrditveni standard - dvojni
- AMP, Tyco, ...
- komunikacijski modul ni vgrajen

ADAPTER KS DOUBLE

- KS keystone fixing standard - double
- AMP, Tyco, ...
- communication module not included

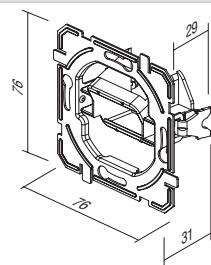


KE47

ADAPTER PD DVOJNI

- PD Panduit MiniCOM pritrditveni standard - dvojni
- komunikacijski modul ni vgrajen

ADAPTER PD DOUBLE

- PD Panduit Mini-COM fixing standard - double
- communication module not included





- KE10PW
- KE10IW
- KE10ES
- KE10CO
- KE10NB

VTIČNICA TV OSNOVNA 0dB

- TV osnovna
 - dušenje 0dB
 - konektor zadaj – F standard
- SOCKET TV BASIC 0dB**
- TV basic
 - reduction 0dB
 - back connector – F standard



- KE11PW
- KE11IW
- KE11ES
- KE11CO
- KE11NB

VTIČNICA TV-R KONČNA 1dB

- TV-R končna
 - frekvenčni pas 5÷862 MHz
 - dušenje: R-1.5dB, TV-1dB
 - ustreza EN 50083-1
 - vijačna priključitev
- SOCKET TV-R END-LINE 1dB**
- TV-R end-line
 - frequency range 5÷862 MHz
 - reduction: R-1.5dB, TV-1dB
 - in accordance with EN 50083-1
 - screw contact



- KE12PW
- KE12IW
- KE12ES
- KE12CO
- KE12NB

VTIČNICA TV-R PREHODNA 10dB

- TV-R prehodna
 - frekvenčni pas 5÷862 MHz
 - dušenje: R-10dB, TV-10dB, prehod-2dB
 - ustreza EN 50083-1
 - vijačna priključitev
- SOCKET TV-R TROUGHPASS 10dB**
- TV-R troughpass
 - frequency range 5÷862 MHz
 - reduction: R-10dB, TV-10dB, trough-2dB
 - in accordance with EN 50083-1
 - screw contacts



- KE16PW
- KE16IW
- KE16ES
- KE16CO
- KE16NB

VTIČNICA SAT-TV-R KONČNA 3dB

- SAT-TV-R končna
 - frekvenčni pas 5÷2400 MHz
 - dušenje: R-1dB, TV-1.5dB, SAT-3dB
 - ustreza EN 50083-1
 - vijačna priključitev
- SOCKET SAT-TV-R END-LINE 3dB**
- SAT-TV-R end-line
 - frequency range 5÷2400 MHz
 - reduction: R-1dB, TV-1.5dB, SAT-3dB
 - in accordance with EN 50083-1
 - screw contacts



- KE22PW
- KE22IW
- KE22ES
- KE22CO
- KE22NB

VTIČNICA AVDIO 2xRCA

- avdio 2xRCA
 - pritridlev vodnikov s spajkanjem
- SOCKET AUDIO 2xRCA**
- audio 2xRCA
 - soldering connection of cable



- KE23PW
- KE23IW
- KE23ES
- KE23CO
- KE23NB

VTIČNICA AVDIO ZVOČNIŠKA

- avdio 2x Ø4mm
 - za priklop zvočniškega vodnika, vtiča Ø4mm ali viličastega kabel čevlja
 - pritridlev vodnikov zadaj s spajkanjem
- SOCKET AUDIO LOUDSPEAKERS**
- audio 2x Ø4mm
 - to accommodate speaker wire, banana plug Ø4mm or spades
 - soldering connection of cable at the back side



- KE36PW
- KE36IW
- KE36ES
- KE36CO
- KE36NB

VTIČNICA TEL KS RJ11 6/4

- KS keystone pritrditveni standard
 - RJ11 6/4
 - ustreza IEC 60603-7
- SOCKET TEL KS RJ11 6/4**
- KS keystone fixing standard
 - RJ11 6/4
 - in accordance with IEC 60603-7





- KE37PW
- KE37IW
- KE37ES
- KE37CO
- KE37NB

VTIČNICA CAT5e KS RJ45 8/8


- KS keystone pritrditveni standard
 - CAT5e, RJ45 8/8
 - ustreza IEC 60603-7
- SOCKET CAT5e KS RJ45 8/8**
- KS keystone fixing standard
 - CAT5e, RJ45 8/8
 - in accordance with IEC 60603-7



- KE40PW
- KE40IW
- KE40ES
- KE40CO
- KE40NB

VTIČNICA CAT6s KS RJ45 8/8 SLIM

- KS keystone pritrditveni standard
 - CAT6s, RJ45 8/8
 - ustreza IEC 60603-7
- SOCKET CAT6s KS RJ45 8/8 SLIM**
- KS keystone fixing standard
 - CAT6s, RJ45 8/8
 - in accordance with IEC 60603-7

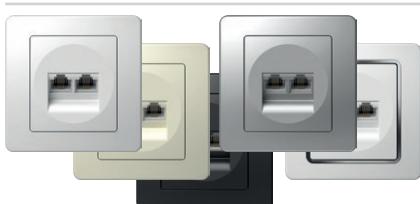

- KE38PW
- KE38IW
- KE38ES
- KE38CO
- KE38NB

VTIČNICA TEL KS DVOJNA 2x RJ11 6/4

- KS keystone pritrditveni standard
 - 2x RJ11, 6/4
 - ustreza IEC 60603-7
- SOCKET TEL KS DOUBLE 2x RJ11 6/4**
- KS keystone fixing standard
 - 2x RJ11, 6/4
 - in accordance with IEC 60603-7



- KE39PW
- KE39IW
- KE39ES
- KE39CO
- KE39NB

VTIČNICA CAT5e KS DVOJNA 2x RJ45 8/8

- KS keystone pritrditveni standard
 - 2x CAT5e, RJ45 8/8
 - ustreza IEC 60603-7
- SOCKET CAT5e KS DOUBLE 2x RJ45 8/8**
- KS keystone fixing standard
 - 2x CAT5e, RJ45 8/8
 - in accordance with IEC 60603-7



- KE41PW
- KE41IW
- KE41ES
- KE41CO
- KE41NB

VTIČNICA CAT6s KS DVOJNA 2x RJ45 8/8 SLIM


- KS keystone pritrditveni standard
 - 2x CAT6s, RJ45 8/8
 - ustreza IEC 60603-7
- SOCKET CAT6s KS DOUBLE 2x RJ45 8/8 SLIM**
- KS keystone fixing standard
 - 2x CAT6s, RJ45 8/8
 - in accordance with IEC 60603-7



- KE35PW
- KE35IW
- KE35ES
- KE35CO
- KE35NB

VTIČNICA TEL LT RJ11 6/4

- TEL LT vijak
 - vijačna pritrditev vodnikov
 - RJ11 6/4
 - ustreza IEC 60603-7
- SOCKET TEL LT RJ11 6/4**
- TEL LT screw
 - screw contacts
 - RJ11 6/4
 - in accordance with IEC 60603-7

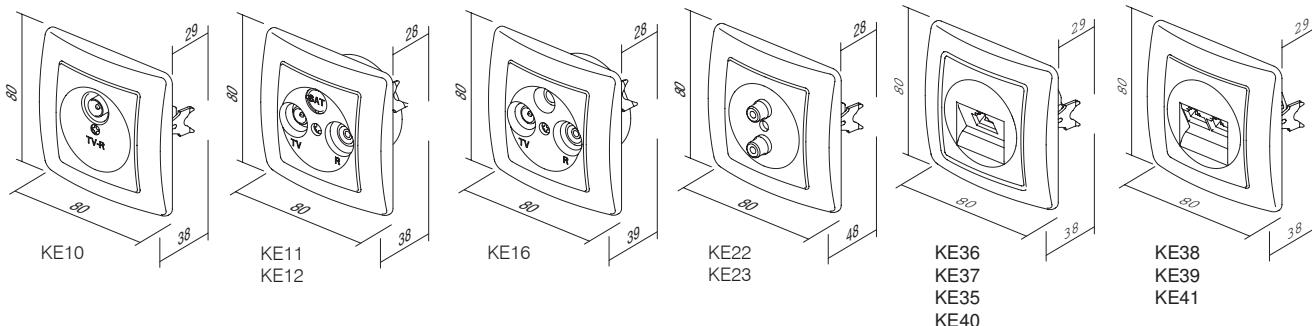



PE20

PW

tip type	naziv description	tehnični opis technical data	barva colour
PE10	POKROV TV-R COVER TV-R	2P/3P	<input type="checkbox"/> PW bela-sijaj polar white
PE20	POKROV KS ENOJNI COVER KS SINGLE		<input type="checkbox"/> IW bež-sijaj ivory white
PE21	POKROV KS DVOJNI COVER KS DOUBLE		<input type="checkbox"/> ES srebrna-mat elox silver
.	.	.	<input type="checkbox"/> CO beli duroplast white thermoset
.	.	.	<input checked="" type="checkbox"/> NB črna-sijaj night black

POKROV TV-R 2P/3P


- TV-R pokrov, 2P ali 3P z vijakom
- COVER TV-R 2P/3P*
- TV-R cover, 2P or 3P with screw



- PE10PW
- PE10IW
- PE10ES
- PE10CO
- PE10NB

POKROV KS ENOJNI


- KS pokrov enojni
- COVER KS SINGLE*
- KS cover single

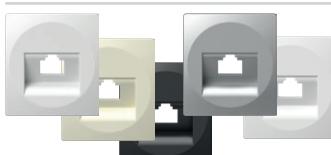

- PE20PW
- PE20IW
- PE20ES
- PE20CO
- PE20NB

POKROV KS DVOJNI

- KS pokrov dvojni
- COVER KS DOUBLE*
- KS cover double







- PE21PW
- PE21IW
- PE21ES
- PE21NB


POKROV TAE/TDO

- TAE ali TDO pokrov z vijakom
- COVER TAE/TDO*
- TAE or TDO cover with screw




- PE30PW
- PE30IW
- PE30ES
- PE30NB



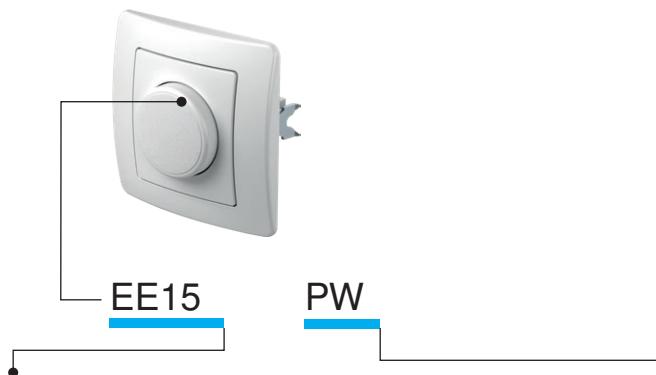

tip type	naziv description	tehnični opis technical data	barva colour
EE15	ZATEMNILNIK ROTACIJSKI MEN DIMMER ROTATIVE 2WAY	RL 400W	<input type="checkbox"/> PW bela-sijaj polar white
EE16	ZATEMNILNIK ROTACIJSKI MEN DIMMER ROTATIVE 2WAY	RLC 400W	<input checked="" type="checkbox"/> IW bež-sijaj ivory white
EE19	ZATEMNILNIK ROTACIJSKI MEN DIMMER ROTATIVE 2WAY	LED 100W	<input type="checkbox"/> ES srebrna-mat elox silver
.	.	.	<input type="checkbox"/> CO beli duroplast white thermoset
.	.	.	<input checked="" type="checkbox"/> NB črna-sijaj night black

ZATEMNILNIK ROTACIJSKI MEN RL 400W




EE15

- rotacijski z menjalnim stikalom
- breme RL, 40W - 400W
- možna vezava z menjalnim stikalom
- vezava večih zatemnilnikov ni dovoljena
- ustreza EN 60669-1 in EN 60669-2-1
- brezvijačna pritridlev vodnikov 1.5mm²
- napajanje 230V~ 50Hz
- premer nastavka gumba Ø6mm
- zamenljiva varovalka vključena

DIMMER ROTATIVE 2WAY RL 400W

- rotation control with 2-way switch
- load RL, 40W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm²
- supply 230V~ 50Hz
- button inner diameter Ø6mm
- replaceable fuse included

ZATEMNILNIK ROTACIJSKI MEN RLC 400W



EE16

- rotacijski z menjalnim stikalom
- breme RLC, 20W - 400W
- možna vezava z menjalnim stikalom
- vezava večih zatemnilnikov ni dovoljena
- ustreza EN 60669-1 in EN 60669-2-1
- brezvijačna pritridlev vodnikov 1.5mm²
- napajanje 230V~ 50Hz
- premer nastavka gumba Ø6mm
- elektronska varovalka

DIMMER ROTATIVE 2WAY RLC 400W

- rotation control with 2-way switch
- load RLC, 20W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm²
- supply 230V~ 50Hz
- button inner diameter Ø6mm
- electronic fuse

ZATEMNLNIK ROTACIJSKI MEN LED 100W




EE19

- rotacijski z menjalnim stikalom
- breme: LED, 0-100W (max. 10 LED sijalk) GLS, 10-250W
- možna vezava z menjalnim stikalom
- vezava več zatemnlnikov ni dovoljena
- ustreza EN 60669-1 in EN 60669-2-1
- brezvijačna pritridlev vodnikov 1,5 mm²
- napajanje 230V~ 50 Hz
- zamenljiva varovalka vključena
- premer nastavka gumba Ø6mm

DIMMER ROTATIVE 2WAY LED 100W

- rotation control with 2-way switch
- load: LED, 0-100W (max. 10 LEDs) GLS, 10-250W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm²
- supply 230V~ 50Hz
- replaceable fuse included
- button inner diameter Ø6mm

IR STIKALO 5A 230V~

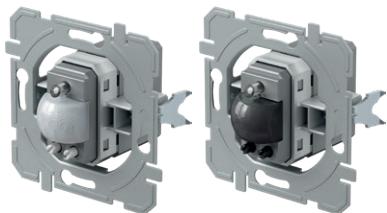

EE32A1
 EE32A2



- IR infrardeče stikalo
- napajanje: 230V~ ±10 % 50Hz
- rele: 5A / 250V~ (zero crossing)
- stopnja varnosti: IP40
- presek žic pri stičniku: 0,75 - 2,5 mm²
- kot zaznavanja: do 110° pri 20°C
- območje zaznavanja: približno 8 m pri 20°C
- nastavljivost časovnega trajanja: od približno 5 s do 12 min
- nastavljivost osvetlitve: od približno 5 do 200 LUX
- temperatura delovanja: od 0°C do +40°C
- ni primeren za vgradnjo v doze, globine 45 mm
- samo za notranjo uporabo

IR SWITCH 5A 230V~

- IR infrared switch
- supply voltage: 230V~ ±10 % 50Hz
- relay: 5A / 250V~ (zero crossing)
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm²
- detection angle: up to 110° at 20°C
- detection area: approx. 8 m at 20°C
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from 0°C to +40°C
- not suitable for installation in 45 mm deep boxes
- only for indoor usage



- EE15PW
- EE15IW
- EE15ES
- EE15CO
- EE15NB



ZATEMNLNIK ROTACIJSKI MEN RL 400W

- rotacijski z menjalnim stikalom
- breme RL, 40W - 400W
- možna vezava z menjalnim stikalom
- vezava večih zatemnilišnikov ni dovoljena
- ustreza EN 60669-1 in EN 60669-2-1
- brezvijačna pritridlev vodnikov 1.5mm²
- napajanje 230V~ 50Hz
- zamenljiva varovalka vključena



DIMMER ROTATIVE 2WAY RL 400W

- rotation control with 2-way switch
- load RL, 40W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm²
- supply 230V~ 50Hz
- replaceable fuse included



- EE16PW
- EE16IW
- EE16ES
- EE16CO
- EE16NB



ZATEMNLNIK ROTACIJSKI MEN RLC 400W

- rotacijski z menjalnim stikalom
- breme RLC, 20W - 400W
- možna vezava z menjalnim stikalom
- vezava večih zatemnilišnikov ni dovoljena
- ustreza EN 60669-1 in EN 60669-2-1
- brezvijačna pritridlev vodnikov 1.5mm²
- napajanje 230V~ 50Hz
- elektronska varovalka



DIMMER ROTATIVE 2WAY RLC 400W

- rotation control with 2-way switch
- load RLC, 20W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm²
- supply 230V~ 50Hz
- electronic fuse



- EE19PW
- EE19IW
- EE19ES
- EE19CO
- EE19NB



ZATEMNLNIK ROTACIJSKI MEN LED 100W

- rotacijski z menjalnim stikalom
- breme: LED, 0-100W (max. 10 LED sijalk) GLS, 10-250W
- možna vezava z menjalnim stikalom
- vezava več zatemnilišnikov ni dovoljena
- ustreza EN 60669-1 in EN 60669-2-1
- brezvijačna pritridlev vodnikov 1,5 mm²
- napajanje 230V~ 50 Hz
- zamenljiva varovalka vključena



DIMMER ROTATIVE 2WAY LED 100W

- rotation control with 2-way switch
- load: LED, 0-100W (max. 10 LEDs) GLS, 10-250W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm²
- supply 230V~ 50Hz
- replaceable fuse included



- EE32PW
- EE32IW
- EE32ES
- EE32CO
- EE32NB



IR STIKALO 5A 230V~

- IR infrardeči stikalo
- napajanje: 230V~ ±10 % 50Hz
- rele: 5A / 250V~ (zero crossing)
- stopnja varnosti: IP40
- presek žic pri stičniku: 0,75 - 2,5 mm²
- kot zaznavanja: do 110° pri 20°C
- območje zaznavanja: približno 8 m pri 20°C
- nastavljivost časovnega trajanja: od približno 5 s do 12 min
- nastavljivost osvetlitve: od približno 5 do 200 LUX
- temperatura delovanja: od 0°C do +40°C
- ni primeren za vgradnjo v doze, globine 45 mm
- samo za notranjo uporabo



IR SWITCH 5A 230V~

- IR infrared switch
- supply voltage: 230V~ ±10 % 50Hz
- relay: 5A / 250V~ (zero crossing)
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm²
- detection angle: up to 110° at 20°C
- detection area: approx. 8 m at 20°C
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from 0°C to +40°C
- not suitable for installation in 45 mm deep boxes
- only for indoor usage



EE69PW
 EE69IW
 EE69NB
 EE69ES

POLNILNIK USB PD 20W

- USB napajalnik z dovajanjem moči do 20W.
- za polnjenje elektronskih naprav prek standardnega USB priključka (kompatibilno tudi z Apple napravami)
- napajanje: 100-230 V~ 50/60 Hz
- poraba med delovanjem: 420 mA pri 100 V~/220 mA pri 230 V~
- poraba v mirovanju: <100 mW pri 230 V~
- izhodna moč: 20W Max
- Izhod:
- USB tip C: 5.0 VDC 3.0A; 9.0 VDC 2.2 A;
12.0 VDC 1.67 A (PD 20W)
- USB tip A: 5.0 VDC 3.0A; 9.0 VDC 2.0 A;
12.0 VDC 1.5 A (QC 18W)
- USB A+C: 5 VDC 3A
- tip konektorja: 1 x USB A; 1 x USB C
- povprečna učinkovitost v aktivnem stanju: 86 %
- učinkovitost pri minimalnemu bremenu (10%): 81%
- temperatura delovanja: 0°C/+ 45 °C (notranja uporaba)
- IP zaščitni razred: IP20, samo za notranjo uporabo
- varnostni razred naprave II
- prenapetostna zaščita (EN 60364-4-44): razred III
- vijačna pritrditev vodnikov max. 2.5 mm²
- naprava z odmikom kontaktov min. 3 mm
- ni primeren za vgradnjo v doze globine 45 mm in ohišja CUBO IP20

Ustreza:

Direktivam: BT, EMC, RoHS, ErP

Standardim: EN IEC 62368-1, EN 55032, EN55035, EN IEC 61000-3-2, EN 61000-3-3, EN 50563, EN IEC 63000

Dodatnim regulativam: (EU) n. 2019/1782 REACH, n. 1907/2006 – art.33.

Prodot lahko vsebuje sledi svinca.



USB POWER SUPPLY UNIT PD 20W

- 20 W USB power delivery power supply unit
- for charging of electronic devices via a standard USB port (also compatible with Apple devices)

- power supply: 100-230V~ 50/60Hz

- power consumption: 420mA at 100V~/220mA at 230V~

- standby power consumption: <100mW at 230V~

- Output power: 20 W Max

- Output:

- USB tip C: 5.0 VDC 3.0A; 9.0 VDC 2.2 A; 12.0 VDC 1.67 A (PD 20W)

- USB tip A: 5.0 VDC 3.0A; 9.0 VDC 2.0 A; 12.0 VDC 1.5 A (QC 18W)

- USB A+C: 5 VDC 3A

- connector type: 1x USB A; 1x USB C

- average efficiency in active mode: 86%

- efficiency with low load (10%): 81%

- operating temperature: 0°C/+45°C (indoor use)

- IP protection class: IP20, indoor use only

- class device II

- overvoltage category (EN 60364-4-44)): Class III

- screw contacts: max. 2.5 mm²

- device with a contact gap of at least 3mm


Conformity:








Directive: BT, EMC, RoHS, ErP

Standards: EN IEC 62368-1, EN 55032, EN55035, EN IEC 61000-3-2, EN 61000-3-3, EN 50563, EN IEC 63000


External power supplies regulation: (EU) n. 2019/1782 REACH, n. 1907/2006

- art.33.The product may contain traces of lead.




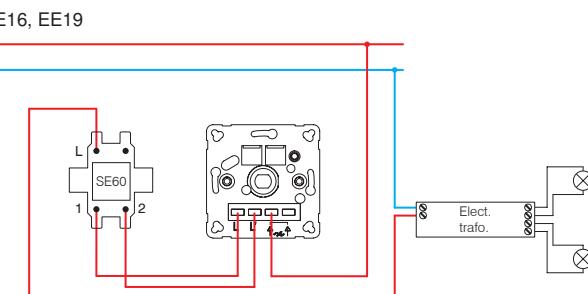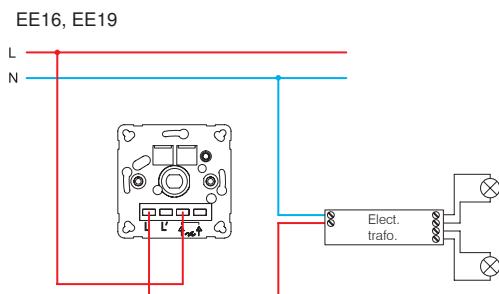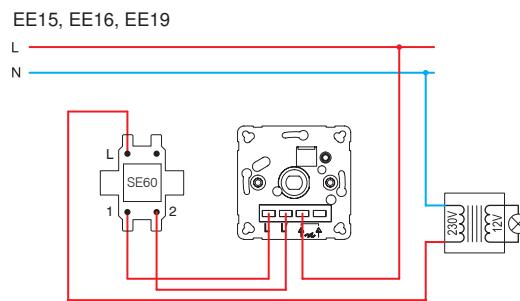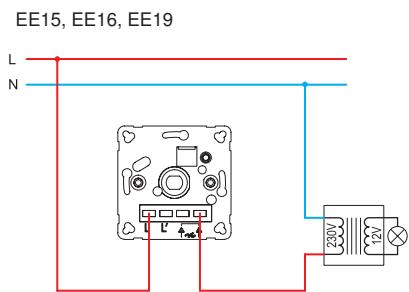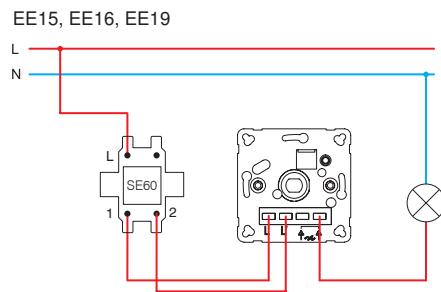




1 - žarnica z žarilno nitko /
incandescent lamp
2 - halogenska žarnica /
halogen lamp

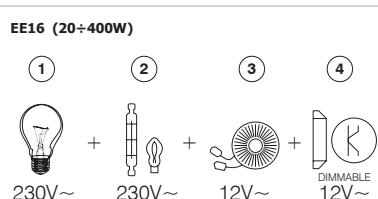


3 - klasični transformator /
classical transformer
4 - zatemnilni elektronski transformator /
dimmable electronic transformer

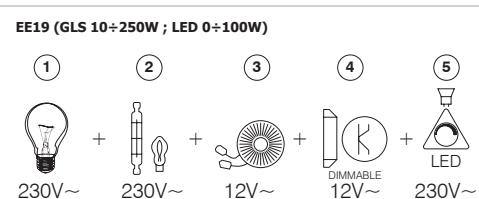

5 - zatemnilna LED sijalka /
dimmable LED lamp



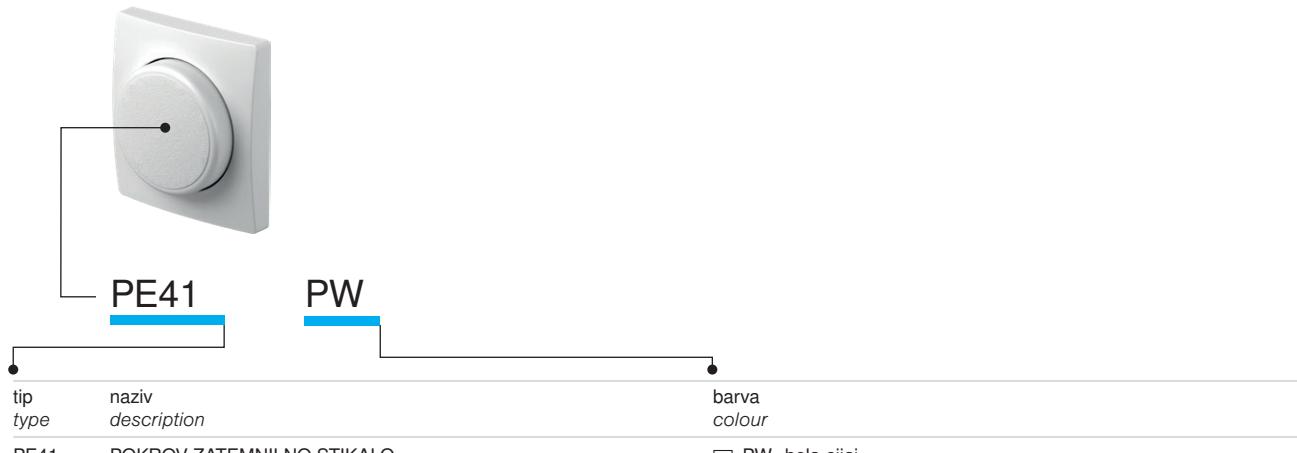

tip type	naziv description	barva colour
PE41	POKROV ZATEMNILNO STIKALO <i>COVER DIMMER</i>	<input type="checkbox"/> PW bela-sijaj <i>polar white</i>
		<input type="checkbox"/> IW bež-sijaj <i>ivory white</i>
		<input type="checkbox"/> ES srebrna-mat <i>elox silver</i>
		<input type="checkbox"/> CO beli duroplast <i>white thermoset</i>
		<input checked="" type="checkbox"/> NB črna-sijaj <i>night black</i>

POKROV ZATEMNILNO STIKALO Ø6



- PE41PW
- PE41IW
- PE41NB
- PE41ES
- PE41CO

- pokrov zatemnilno stikalo Ø6mm
- za EE15, EE16, EE19

COVER DIMMER Ø6

- cover dimmer Ø6mm
- for EE15, EE16, EE19



POKROV IR STIKALO




- PE32PW
- PE32IW
- PE32NB
- PE32ES


- pokrov IR stikalo

COVER IR SWITCH

- cover IR switch

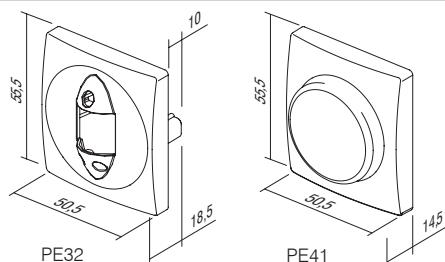

A C C E S S O R I E S A E

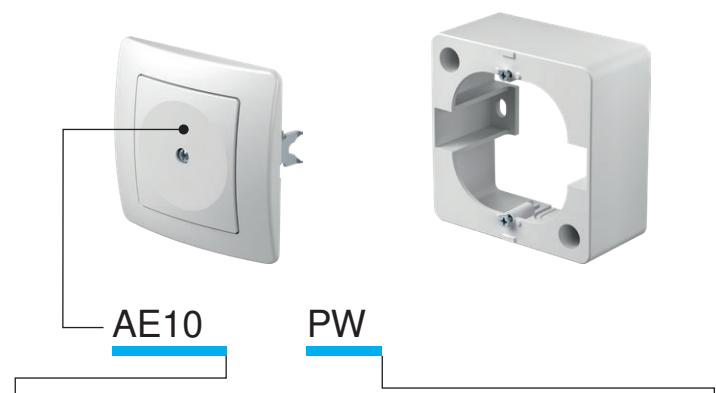

tip type	naziv description	barva colour
AE10	POLNILO <i>BLANK</i>	<input type="checkbox"/> PW bela-sijaj <i>polar white</i>
AE20	PRIKLJUČEK PETPOLNI STALNI 3P+N+E 5X4mm ² <i>CONNECTION BOX 3P+N+E 5x4mm²</i>	<input type="checkbox"/> IW bež-sijaj <i>ivory white</i>
AE30	OHIŠJE NO 1 <i>SURFACE MOUNT BOX</i>	<input type="checkbox"/> ES srebrna-mat <i>elox silver</i>
.	.	<input type="checkbox"/> CO beli duroplast <i>white thermoset</i>
.	.	<input checked="" type="checkbox"/> NB črna-sijaj <i>night black</i>

POLNILO



- AE10PW
- AE10IW
- AE10NB
- AE10ES
- AE10CO

- za pokrivanje praznih odprtin

BLANK

- for filling up empty spaces

PRIKLJUČEK PETPOLNI STALNI 3P+N+E 5x4mm²

- AE20PW
- AE20IW

- 3P+N+E stalni priključek

- 16A 400V~

- ustrezna VDE 0601-1:2000

- vijačna pritrditev vodnikov 1.5-4mm²

CONNECTION BOX 5POLE 3P+N+E 5x4mm²

- 3P+N+E connection box


- 16A 400V~

- in accordance with VDE 0606-1:2000

- screw contacts 1.5-4mm²



OHIŠJE NADOMETNO 1



- AE30PW
- AE30IW


- nadometno ohišje

SURFACE MOUNT BOX 1

- surface mounting box



OHIŠJE NADOMETNO ZA DVOJNO VTIČNICO



- AE31PW

- nadometno ohišje


SURFACE MOUNT BOX FOR DOUBLE SOCKET

- surface mounting box



STENSKI ŠČITNIK

- AE50PW
 AE50TS

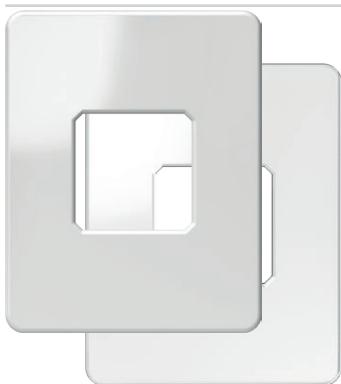

- ščitnik stene okoli stikala ali vtičnice

WALL PROTECTION

- protects surface around socket or switch

OTROŠKA ZAŠČITA KS


- AE51PW
 AE51IW




- KS otroška zaščita pred dotikom kontaktov

CHILD PROTECTION KS


- KS additional child protection insert - shuttered live contacts




AE20





AE30



AE31



AE10

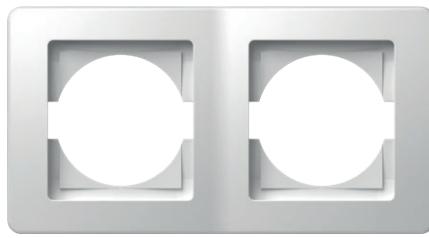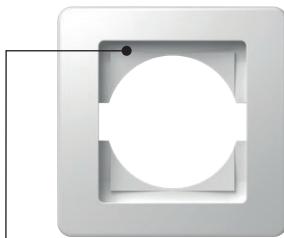

OE10

PW


tip type	naziv description	barva colour
OE10	OKVIR EKONOMIK 1 SURROUND EKONOMIK 1	<input type="checkbox"/> PW bela-sijaj polar white
OE20	OKVIR EKONOMIK 2 HORIZONTALNI SURROUND EKONOMIK 2 HORIZONTAL	<input type="checkbox"/> IW bež-sijaj ivory white
OE30	OKVIR EKONOMIK 3 HORIZONTALNI SURROUND EKONOMIK 3 HORIZONTAL	<input type="checkbox"/> ES srebrna-mat elox silver
.	.	<input type="checkbox"/> CO beli duroplast white thermoset
.	.	<input checked="" type="checkbox"/> NB črna-sijaj night black



OKVIR EKONOMIK 1

- OE10PW
- OE10IW
- OE10ES
- OE10CO
- OE10NB


- dekorativni enojni okvir
 - ustreza EN 60669-1
- SURROUND EKONOMIK 1**
- decorative surround 1-gang
 - in accordance with EN 60669-1



OKVIR EKONOMIK 2 HORIZONTALNI

- OE20PW
- OE20IW
- OE20ES
- OE20CO
- OE20NB


- dekorativni dvojni horizontalni okvir
 - ustreza EN 60669-1
- SURROUND EKONOMIK 2 HORIZONTAL**
- decorative surround 2-gang horizontal
 - in accordance with EN 60669-1



OKVIR EKONOMIK 2 VERTIKALNI

- OE21PW
- OE21IW
- OE21ES
- OE21CO
- OE21NB


- dekorativni dvojni vertikalni okvir
 - ustreza EN 60669-1
- SURROUND EKONOMIK 2 VERTICAL**
- decorative surround 2-gang vertical
 - in accordance with EN 60669-1



OKVIR EKONOMIK 3 HORIZONTALNI

- OE30PW
- OE30IW
- OE30ES
- OE30CO
- OE30NB

- dekorativni trojni horizontalni okvir
 - ustreza EN 60669-1
- SURROUND EKONOMIK 3 HORIZONTAL**
- decorative surround 3-gang horizontal
 - in accordance with EN 60669-1

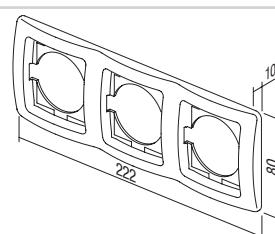




- OE31PW
- OE31IW
- OE31ES
- OE31CO
- OE31NB

OKVIR EKONOMIK 3 VERTIKALNI

- dekorativni trojni vertikalni okvir
- ustreza EN 60669-1

SURROUND EKONOMIK 3 VERTICAL

- decorative surround 3-gang vertical
- in accordance with EN 60669-1

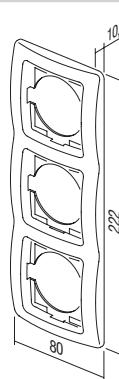


- OE40PW
- OE40IW
- OE40ES
- OE40NB

OKVIR EKONOMIK 4 HORIZONTALNI

- dekorativni četvorni horizontalni okvir
- ustreza EN 60669-1

SURROUND EKONOMIK 4 HORIZONTAL

- decorative surround 4-gang horizontal
- in accordance with EN 60669-1

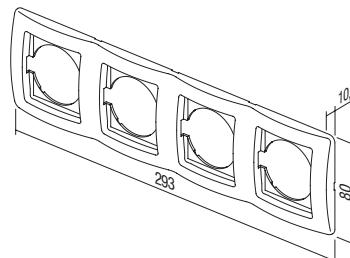



- OE41PW
- OE41IW
- OE41ES
- OE41NB

OKVIR EKONOMIK 4 VERTIKALNI

- dekorativni četvorni vertikalni okvir
- ustreza EN 60669-1

SURROUND EKONOMIK 4 VERTICAL

- decorative surround 4-gang vertical
- in accordance with EN 60669-1

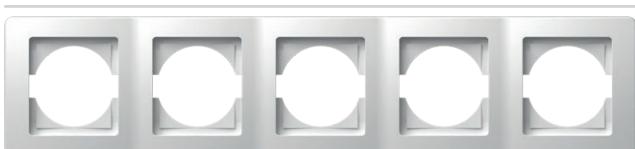


- OE50PW
- OE50IW
- OE50ES
- OE50NB

OKVIR EKONOMIK 5 HORIZONTALNI

- dekorativni 5-mestni horizontalni okvir
- ustreza EN 60669-1

SURROUND EKONOMIK 5 HORIZONTAL

- decorative surround 5-gang horizontal
- in accordance with EN 60669-1

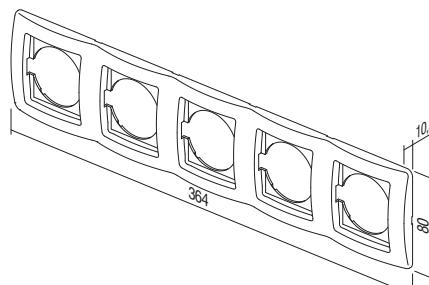

DEKORATIVNI OKVIRČKI COLOR /
COLOR DECORATIVE FRAMES



OE90GR	ZELENA / GREEN	OE90YL	RUMENA / YELLOW	OE90MB	MET. MODRA / MET. BLUE
OE90BL	MODRA / BLUE	OE90WH	BELA / WHITE	OE90BZ	BRON / BRONZE
OE90VO	VIJOLA / VIOLET	OE90GY	SIVA / GREY	OE90CR	SREBRNA / SILVER
OE90PI	ROZA / PINK	OE90BK	ČRNA / BLACK	OE90GO	ZLATA / GOLD
OE90RD	RDEČA / RED				






fontana



TEM



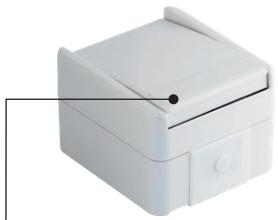

SF10

PW

TI

tip type	naziv description	tehnični opis technical data	barva colour	opcijski opis 1 optional data 1
SF10	STIKALO ENOPOLNO SWITCH 1WAY	IP44 10AX 250V~	<input type="checkbox"/> PW bela-mat white-mat	TI tlivka+indikator neon lamp+indication
SF11	TIPKALO ENOPOLNO PUSH BUTTON 1WAY	IP44 10A 250V~	<input checked="" type="checkbox"/> GY siva-mat grey-mat	
SF20	STIKALO DVOPOLNO SWITCH 2POLE	IP44 10AX 250V~		
.	.	.		
.	.	.		



SF10PW
 SF10GY

STIKALO ENOPOLNO IP44 10AX 250V~

- 10AX 250V~, tip SF10
- ustreza EN 60669-1
- brezvijačna pritrditev vodnikov 1.5-2.5mm²
- SWITCH 1WAY IP44 10AX 250V~**
- 10AX 250V~, type SF10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²



SF10PW
 SF10GY

STIKALO ENOPOLNO IP44 10AX 250V~ __ TI

- TI indikator+tlivka
- 10AX 250V~, tip SF10
- ustreza EN 60669-1
- brezvijačna pritrditev vodnikov 1.5-2.5mm²
- SWITCH 1WAY IP44 10AX 250V~ __ TI**
- TI indicator+neon lamp
- 10AX 250V~, type SF10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²



SF11PW
 SF11GY

TIPKALO ENOPOLNO IP44 10A 250V~ __ TI

- TI indikator+tlivka
- 10A 250V~, tip SF11
- ustreza EN 60669-1
- brezvijačna pritrditev vodnikov 1.5-2.5mm²
- PUSH BUTTON 1WAY IP44 10A 250V~ __ TI**
- TI indicator+neon lamp
- 10A 250V~, type SF11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²



SF20PW
 SF20GY

STIKALO DVOPOLNO IP44 10AX 250V~

- 10AX 250V~, tip SF20
- ustreza EN 60669-1
- brezvijačna pritrditev vodnikov 1.5-2.5mm²
- SWITCH 2POLE IP44 10AX 250V~**
- 10AX 250V~, type SF20
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm²



S W I T C H E S S F



SF50PW
 SF50GY

STIKALO SERIJSKO IP44 10AX 250V~

- 10AX 250V~, tip SF50
 - ustreza EN 60669-1
 - brezvijačna pritrditev vodnikov 1.5-2.5mm²
- SWITCH 2GANG-1WAY IP44 10AX 250V~**
- 10AX 250V~, type SF50
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



SF51PW
 SF51GY

TIPKALO SERIJSKO IP44 10A 250V~

- 10A 250V~, tip SF51
 - ustreza EN 60669-1
 - brezvijačna pritrditev vodnikov 1.5-2.5mm²
- PUSH BUTTON 2GANG-1WAY IP44 10A 250V~**
- 10A 250V~, type SF51
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



SF60PW
 SF60GY

STIKALO MENJALNO IP44 10AX 250V~

- 10AX 250V~, tip SF60
 - ustreza EN 60669-1
 - brezvijačna pritrditev vodnikov 1.5-2.5mm²
- SWITCH 2WAY IP44 10AX 250V~**
- 10AX 250V~, type SF60
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



SF60PWTI
 SF60GYTI

STIKALO MENJALNO IP44 10AX 250V~ _ TI

- TI indikator+tlivka
 - 10AX 250V~, tip SF60
 - ustreza EN 60669-1
 - brezvijačna pritrditev vodnikov 1.5-2.5mm²
- SWITCH 2WAY IP44 10AX 250V~ _ TI**
- TI indicator+neon lamp
 - 10AX 250V~, type SF60
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



SF63PW
 SF63GY

STIKALO DVOJNO MENJALNO IP44 10AX 250V~


- 10AX 250V~, tip SF63
 - ustreza EN 60669-1
 - brezvijačna pritrditev vodnikov 1.5-2.5mm²
- SWITCH 2WAY DOUBLE IP44 10AX 250V~**
- 10AX 250V~, type SF63
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²



SF70PW
 SF70GY

STIKALO KRIŽNO IP44 10AX 250V~

- 10AX 250V~, tip SF70
 - ustreza EN 60669-1
 - brezvijačna pritrditev vodnikov 1.5-2.5mm²
- SWITCH INTERMEDIATE IP44 10AX 250V~**
- 10AX 250V~, type SF70
 - in accordance with EN 60669-1
 - plug-in contacts 1.5-2.5mm²

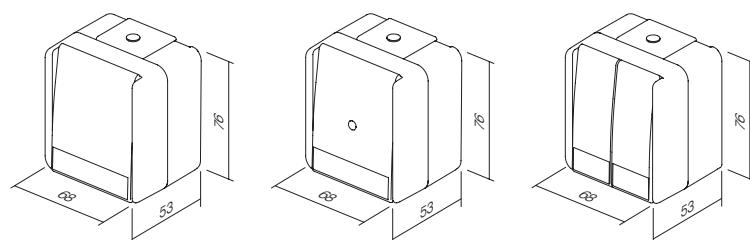



VF10

PW

tip type	naziv description	tehnični opis technical data	barva colour
VF10	VTIČNICA SCHUKO+POKROV SOCKET SCHUKO+COVER	IP44 2P+E 16A 250V~	<input type="checkbox"/> PW bela-mat white-mat <input checked="" type="checkbox"/> GY siva-mat grey-mat



VF10PW
 VF10GY

VTIČNICA SCHUKO+POKROV IP44 2P+E 16A 250V~


- vijačna pritrditev vodnikov 1.5-2.5mm²
 - 2P+E schuko+ покров
 - 16A 250V~, tip VF10
 - ustreza EN 60884-1, CEE7
- SOCKET SCHUKO+COVER IP44 2P+E 16A 250V~
- screw contacts 1.5-2.5mm²
 - 2P+E schuko+cover
 - 16A 250V~, type VF10
 - in accordance with EN 60884-1, CEE7



VF12PW
 VF12GY

VTIČNICA SCHUKO+POKROV IP44 2P+E 16A 250V~ BV

- BV brezvijačna pritrditev vodnikov 1.5-2.5mm²
 - 2P+E schuko+ покров
 - 16A 250V~, tip VF12
 - ustreza EN 60884-1, CEE7
- SOCKET SCHUKO+COVER IP44 2P+E 16A 250V~ BV
- BV plug-in contacts 1.5-2.5mm²
 - 2P+E schuko+cover
 - 16A 250V~, type VF12
 - in accordance with EN 60884-1, CEE7

VF10
VF12



CF11

PW

tip type	naziv description	tehnični opis technical data	barva colour
CF10	SET VTIČNICA SCHUKO DVOJNA HORIZ SOCKET SET SCHUKO DOUBLE HORIZ	2x 2P+E 16A 250V~ IP44	<input type="checkbox"/> PW bela-mat white-mat
CF11	SET VTIČNICA SCHUKO DVOJNA VERT SOCKET SET SCHUKO DOUBLE VERT	2x 2P+E 16A 250V~ IP44	<input checked="" type="checkbox"/> GY siva-mat grey-mat
CF12	SET VTIČNICA SCH + STIKALO MEN HORIZ SOCKET SCH+SWITCH 2WAY HORIZ	16A + 10A 250V~ IP44	.
.	.	.	.
.	.	.	.



CF10PW
 CF10GY

SET VTIČNICA SCHUKO DVOJNI HORIZONTALNI IP44 2x 2P+E 16A 250V~

- vijačna pritrditev vodnikov 1.5-2.5mm²
- 2x 2P+E schuko+pokrov horizontalni
- 16A 250V~, tip CF10
- ustreza EN 60884-1, CEE7

**SOCKET SET SCHUKO DOUBLE
HORIZONTAL IP44 2x 2P+E 16A 250V~**
- screw contacts 1.5-2.5mm²
- 2x 2P+E schuko+cover horizontal
- 16A 250V~, type CF10
- in accordance with EN 60884-1, CEE7



CF11PW
 CF11GY

SET VTIČNICA SCHUKO DVOJNI VERTIKALNI IP44 2x 2P+E 16A 250V~

- vijačna pritrditev vodnikov 1.5-2.5mm²
- 2x 2P+E schuko+pokrov vertikalni
- 16A 250V~, tip CF11
- ustreza EN 60884-1, CEE7

**SOCKET SET SCHUKO DOUBLE VERTICAL
IP44 2x 2P+E 16A 250V~**
- screw contacts 1.5-2.5mm²
- 2x 2P+E schuko+cover vertical
- 16A 250V~, type CF11
- in accordance with EN 60884-1, CEE7



CF12PW
 CF12GY

SET VTIČNICA SCH + STIKALO MEN HORIZONTALNI IP44 16A + 10AX 250V~

- vijačna (vtičnica), brezvijačna (stikalo) pritrditev
vodnikov 1.5-2.5mm²
- 2P+E schuko+pokrov + stikalo menjalno horizontalni
- 16A + 10AX 250V~, tip CF12
- ustreza EN 60884-1, CEE7, EN 60669-1

**SOCKET SCH+SWITCH SET 2WAY
HORIZONTAL IP44 16A + 10AX 250V~**
- screw (socket), plug-in (switch)
contacts 1.5-2.5mm²
- 2P+E schuko+cover + switch 2-way horizontal
- 16A + 10AX 250V~, type CF12
- in accordance with EN 60884-1, CEE7, EN 60669-1



SET VTIČNICA SCH + STIKALO MEN VERTIKALNI IP44 16A + 10AX 250V~



CF13PW
 CF13GY

- vijačna (vtičnica), brezvijačna (stikalo)
pričrpitev vodnikov 1.5-2.5mm²
- 2P+E schuko+pokrov + stikalo menjalno
vertikalni
- 16A + 10AX 250V~, tip CF13
- ustreza EN 60884-1, CEE7, EN 60669-1



**SOCKET SCH+SWITCH 2WAY SET
VERTICAL IP44 16A + 10AX 250V~**
- screw (socket), plug-in (switch)
contacts 1.5-2.5mm²
- 2P+E schuko+cover + switch 2-way vertical
- 16A + 10AX 250V~, type CF13
- in accordance with EN 60884-1, CEE7, EN 60669-1



CF14PW
 CF14GY

- BV brezvijačna pričrpitev vodnikov 1.5-2.5mm²
- 2x 2P+E schuko+pokrov horizontalna
- 16A 250V~, tip CF14
- ustreza EN 60884-1, CEE7



**SOCKET SET SCHUKO DOUBLE
HORIZONTAL IP44 2x 2P+E 16A 250V~ BV**
- BV plug-in contacts 1.5-2.5mm²
- 2x 2P+E schuko+cover horizontal
- 16A 250V~, type CF14
- in accordance with EN 60884-1, CEE7



CF15PW
 CF15GY

- BV brezvijačna pričrpitev vodnikov 1.5-2.5mm²
- 2x 2P+E schuko+pokrov vertikalna
- 16A 250V~, tip CF15
- ustreza EN 60884-1, CEE7



**SOCKET SET SCHUKO DOUBLE VERTICAL
IP44 2x 2P+E 16A 250V~ BV**
- BV plug-in contacts 1.5-2.5mm²
- 2x 2P+E schuko+cover vertical
- 16A 250V~, type CF15
- in accordance with EN 60884-1, CEE7



CF16PW
 CF16GY

- BV brezvijačna pričrpitev vodnikov 1.5-2.5mm²
- 2P+E schuko+pokrov + stikalo menjalno
horizontalni
- 16A + 10AX 250V~, tip CF16
- ustreza EN 60884-1, CEE7, EN 60669-1



**SOCKET+SWITCH SET SCH+2WAY
HORIZONTAL IP44 16A + 10AX 250V~ BV**
- BV plug-in contacts 1.5-2.5mm²
- 2P+E schuko+cover + switch 2-way
horizontal
- 16A + 10AX 250V~, type CF16
- in accordance with EN 60884-1, CEE7, EN 60669-1



CF17PW
 CF17GY

- BV brezvijačna pričrpitev vodnikov 1.5-2.5mm²
- 2P+E schuko+pokrov + stikalo menjalno
vertikalni
- 16A + 10AX 250V~, tip CF17
- ustreza EN 60884-1, CEE7, EN 60669-1



**SOCKET SCH+SWITCH 2WAY SET
VERTICAL IP44 16A + 10AX 250V~ BV**
- BV plug-in contacts 1.5-2.5mm²
- 2P+E schuko+cover + switch 2-way vertical
- 16A + 10AX 250V~, type CF17
- in accordance with EN 60884-1, CEE7, EN 60669-1



AF10

PW

tip type	naziv description	tehnični opis technical data	barva colour
AF10	RAZVODNICA <i>DISTRIBUTION BOX</i>	IP44 RN01	<input type="checkbox"/> PW bela-mat white-mat
AF20	RAZVODNICA <i>DISTRIBUTION BOX</i>	IP55 ND01	<input checked="" type="checkbox"/> GY siva-mat grey-mat

RAZVODNICA IP44 RN01




- AF10PW
- AF10GY

- nadomestna razvodnica IP44
- 16A 400V~
- ustreza IEC/EN 60670-1, IEC/EN 60670-22

DISTRIBUTION BOX IP44 RN01

- surface mounting distribution box IP44
- 16A 400V~
- In accordance with IEC/EN 60670-1, IEC/EN 60670-22



RAZVODNICA IP55 ND01





- AF20PW
- AF20GY


- nadomestna razvodnica IP55
- uvodnice priložene
- ustreza IEC/EN 60670-1, IEC/EN 60670-22

DISTRIBUTION BOX IP55 ND01


- surface mounting connection box IP55
- glands included
- In accordance with IEC/EN 60670-1, IEC/EN 60670-22




CF10
CF14



CF11
CF15

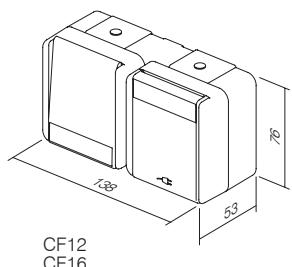

CF12
CF16



CF13
CF17

šifra	opis izdelka	stran	šifra	opis izdelka	stran
STIKALA SM					
SM10	STIKALO ENOPOLNO 16AX 250V~ 1M	44	KM10--	VTIČNICA TV OSNOVNA 0dB 1M	60
SM11	TIPKALO ENOPOLNO 16A 250V~ 1M	44	KM20--	VTIČNICA TV OSNOVNA 0dB 2M	60
SM12	STIKALO ENOPOLNO 20A 250V~ 1M	44	KM11--	VTIČNICA TV KONČNA 1dB 1M	60
SM20	STIKALO DVOPOLNO 16AX 250V~ 1M	44	KM12--	VTIČNICA TV PREHODNA 10dB 1M	61
SM40	STIKALO ŽALUZJSKO 1-0-2 16AX 250V~ 1M	45	KM15--	VTIČNICA SAT OSNOVNA 0dB 1M	61
SM41	TIPKALO ŽALUZJSKO 1-0-2 16A 250V~ 1M	45	KM24--	VTIČNICA SAT OSNOVNA 0dB 2M	61
SM60	STIKALO MENJALNO 16AX 250V~ 1M	45	KM16--	VTIČNICA SAT KONČNA 1dB 1M	61
SM61	TIPKALO MENJALNO 16A 250V~ 1M	45	KM19--	VTIČNICA R OSNOVNA 0dB 1M	62
SM70	STIKALO KRIŽNO 16AX 250V~ 1M	45	KM29--	VTIČNICA R OSNOVNA 0dB 2M	62
SM10--	STIKALO ENOPOLNO 16AX 250V~ 1M	46	KM17--	VTIČNICA SAT-TV KONČNA 1dB 1M	62
SM10--IN	STIKALO ENOPOLNO 16AX 250V~ 1M IN	46	KM22--	VTIČNICA AVDIO 2xRCA 1M	63
SM11--	TIPKALO ENOPOLNO 16A 250V~ 1M	46	KM23--	VTIČNICA AVDIO ZVOČNIŠKA 1M	63
SM11--IN01	TIPKALO ENOPOLNO 16A 250V~ 1M IN 01	46	KM26--	VTIČNICA AVDIO ZVOČNIŠKA 2M	63
SM11--IN02	TIPKALO ENOPOLNO 16A 250V~ 1M IN 02	47	KM30--	VTIČNICA TEL LT RJ11 6/4 1M	64
SM20--NT03	STIKALO DVOPOLNO 16AX 250V~ 1M NT 03	47	KM31--	VTIČNICA TEL BT SEC 6/6 1M	64
SM20--IN	STIKALO DVOPOLNO 16AX 250V~ 1M IN	47	KM36--	VTIČNICA TEL KS RJ11 6/4 1M	64
SM40--NT10	STIKALO ŽALUZJSKO 1-0-2 16AX 250V~ 1M NT 10	47	KM37--	VTIČNICA CAT5e KS RJ45 8/8 1M	64
SM41--NT10	TIPKALO ŽALUZJSKO 1-0-2 16A 250V~ 1M NT 10	47	KM35--	ADAPTER KS 1M	64
SM60--	STIKALO MENJALNO 16AX 250V~ 1M	47	KM38--	ADAPTER KS S PRAŠNO ZAŠČITO 1M	64
SM61--	TIPKALO MENJALNO 16A 250V~ 1M	48	KM39--	VTIČNICA CAT6 SCH KS RJ45 8/8 1M	65
SM62--CD	TIPKALO MENJALNO Z VRVICO 16A 250V~ 1M CD	48	KM50--	ADAPTER KS UNIVERZALNI 1M	65
SM70--	STIKALO KRIŽNO 16AX 250V~ 1M	48	KM40--	ADAPTER PD 1M	65
TIPKE TM					
TM11--	TIPKA 1M	49	KM43--	ADAPTER PD S PRAŠNO ZAŠČITO 1M	65
TM11--IN	TIPKA 1M IN	49	KM46--	ADAPTER R&M 1M	66
TM12--	TIPKA 2M	49	KM52--	ADAPTER R&M CAT6A 1M	66
TM12--IN	TIPKA 2M IN	49	KM47--	ADAPTER R&M S PRAŠNO ZAŠČITO 1M	66
TM13--IL	TIPKA 2M Z NAPISNO PLOŠČICO	50	KM53--	ADAPTER R&M CAT6A S PRAŠNO ZAŠČITO 1M	66
TM15--	TIPKA 1M DVOPOLNA	50	KM45--	ADAPTER LK 1M	67
TM21--	POLNILO 1M	50	KA26	ADAPTER NEXANS/SCRACK 2M	67
TM22--	POLNILO 2M	50	KM48--	ADAPTER AT&T SYSTIMAX S PRAŠNO ZAŠČITO 1M	67
TM31--	UVODNICA 1M	50	KM51--	VTIČNICA USB TIP A 1M	67
SIGNALIZACIJA IA					
IA10OR	TLIVKA 230V~ 0,34W	52	KOMUNIKACIJSKI PRIBOR KA		
IA20--	LED SIGNALIZACIJA 230V AC/DC 0,4W	52	KA10	KONEKTOR KS CAT3 RJ11 6/4	68
IA21--	LED SIGNALIZACIJA 24V AC/DC 0,2W	52	KA11	KONEKTOR KS CAT5e RJ45 8/8	68
IA22--	LED SIGNALIZACIJA 12V AC/DC 0,10W	52	KA12	KONEKTOR KS CAT5eS RJ45 8/8	68
IA50	RC VEZJE 250V	52	KA15	KONEKTOR KS CAT6 SCHRACK RJ45 8/8	69
STIKALA SP					
SP10	STIKALO ENOPOLNO 16AX 250V~ 1M	54	KA16	KONEKTOR KS CAT6S SCHRACK RJ45 8/8	69
SP11	TIPKALO ENOPOLNO 16A 250V~ 1M	54	KA17	KONEKTOR KS CAT6a SCHRACK RJ45 8/8	69
SP12	STIKALO ENOPOLNO 20A 250V~ 1M	54	KA18	KONEKTOR SLIM KS CAT6S SCHRACK RJ45 8/8	69
SP20	STIKALO DVOPOLNO 16AX 250V~ 1M	54	KA27	KONEKTOR KS HDMI	69
SP40	STIKALO ŽALUZJSKO 1-0-2 16AX 250V~ 1M	55	KA28	KABEL KS HDMI	69
SP41	TIPKALO ŽALUZJSKO 1-0-2 16A 250V~ 1M	55			
SP60	STIKALO MENJALNO 16AX 250V~ 1M	55			
SP61	TIPKALO MENJALNO 16A 250V~ 1M	55			
SP70	STIKALO KRIŽNO 16AX 250V~ 1M	55			
VTIČNICE VM					
VM10--	VTIČNICA SCHUKO+KS 2P+E 16A 250V~ 2M	56			
VM11--	VTIČNICA SCHUKO+KS+POKROV 2P+E 16A 250V~ 2M	56			
VM20--	VTIČNICA EURO+KS 2P 10A 250V~ 1M	57			
VM40--	VTIČNICA FRANCOSKA+KS 2P+E 16A 250V~ 2M	57			
VM41--	VTIČNICA FRANCOSKA+KS+POKROV 2P+E 16A 250V~ 2M	57			
VM30--	VTIČNICA ITALIJANSKA P17/11+KS 2P+E 16A 250V~ 1M	57			
VM31--	VTIČNICA SCHUKO/ITA P17/11+KS 2P+E 16A 250V~ 2M	57			
VM32--	VTIČNICA SCHUKO/ITA P30+KS 2P+E 16A 250V~ 2M	58			
VM33--	VTIČNICA ITALIJANSKA P11+KS 2P+E 10A 250V~ 1M	58			
VM21--	VTIČNICA EURO/AMERIŠKA+KS 2P 16A 250V~ 1M	58			
VM52--	VTIČNICA BRITANSKA BS 1363+KS 2P+E 13A 250V~ 2M	58			
VM55--	VTIČNICA VEČSTANDARDNA+KS 2P+E 13A 250V~ 2M	58			
VM80	PRENAPETOSTNA ZAŠČITA MPE MINI 275V/50Hz	58			

šifra	opis izdelka	stran	šifra	opis izdelka	stran			
ELEKTRONIKA EM								
EM12--	ZATEMNILNIK ROTACIJSKI/MENJALNI RL 300W 1M	70	OL10--	OKVIR LINE 1/2M	106			
EM13--	ZATEMNILNIK ROTACIJSKI/MENJALNI LED 60W 1M	71	OL20--	OKVIR LINE 2M	106			
EM14--	ZATEMNILNIK ROTACIJSKI/MENJALNI LED 180W 1M	71	OL24--	OKVIR LINE 2x2M	106			
EM15--	ZATEMNILNIK ROTACIJSKI R 250W 1M	72	OL26--	OKVIR LINE 3x2M	106			
EM23	ZATEMNILNIK VGRADNI R (250 W), (RC,RL 200VA)	72	OL28--	OKVIR LINE 4x2M	106			
EM16--	1-10 V ZATEMNILNIK ROTACIJSKI MENJALNI	73	OL29--	OKVIR LINE 5x2M	106			
EM17	KRMILNI modul MZC za EM18	74	OL13--	OKVIR LINE 1/3M	107			
EM18	ZATEMNILNIK VGRADNI LED 250W	74	OL30--	OKVIR LINE 3M	107			
EM19	ZATEMNILNIK VGRADNI DC LED 96W	75	OL40--	OKVIR LINE 4M	107			
EM25--	STIKALO/ZATEMNILNIK UNIVEZALNI RLC 0-300W 2M	76	OL70--	OKVIR LINE 7M	107			
EM26--	TIPKALO UPRAVLJALNO 2M	78	OL71--	OKVIR LINE 2x7M	107			
EM25PPOL20	SET STIKALO / ZATEMNILNIK UNIVERZALNI RLC 0-300W 2M PP OL20	78	OL23--	OKVIR LINE 2/3M	107			
EM27	FILTER OMREŽNIH MOTENJ	79	OKVIRJI LINE OL					
EM28--	OHIŠJE TALILNE VAROVALKE 230 VAC, 50Hz 1M	79	OS10--	OKVIR SOFT 1/2M	110			
EM29	VAROVALKA	79	OS20--	OKVIR SOFT 2M	110			
EM31--	IR STIKALO 5A 230V~ 1M	79	OS24--	OKVIR SOFT 2x2M	110			
EM32--	IR STIKALO 5A 230V~ 2M	80	OS26--	OKVIR SOFT 3x2M	110			
EM33--	SENZORSKO STIKALO 5A 230V~ 1M	80	OS28--	OKVIR SOFT 4x2M	110			
EM38--	TERMOSTAT OGREVANJE 5(2)A 230V~ 2M	82	OS13--	OKVIR SOFT 1/3M	111			
EM39--	TERMOSTAT OGREVANJE/HLAJENJE 3(1,5)A 230V~ 2M	83	OS30--	OKVIR SOFT 3M	111			
NM39	NOSILEC Z VIJAKI ZA TERMOSTATE FANTINI COSMI 3M	84	OS40--	OKVIR SOFT 4M	111			
EM46--	KARTIČNO STIKALO 16 A / 230 VAC, 50 Hz 3M	84	OS70--	OKVIR SOFT 7M	111			
EM44--	KARTIČNO STIKALO ZA VARČEVANJE Z ENERGIJO RF HF 13,56MGz 3M	85	OS71	OKVIR SOFT 2x7M	111			
EM47	KARTICA ISO	85	OS72--	OKVIR SOFT 2x7M	111			
EM49	RELE ENOTA ZA KARTIČNO STIKALO 2x16A 250V	86	OS23--	OKVIR SOFT 2/3M	111			
EM45	RAZDELILNIK SPL-1	86	OKVIRJI PURE OP					
EM60--	VTIČNICA ZA BRVNÍK 230V~/120V~ 3M	87	OP20-	OKVIR PURE 2M	116			
EM57	LED ZASILNA SVETILKA 230V~ 50Hz 0,5W, NiMH 2h 2M	87	OP24-	OKVIR PURE 2x2M	116			
EM55	LED ZASILNA SVETILKA 250V~ 0,9W, NiCd 3h 7M	88	OP26-	OKVIR PURE 3x2M	116			
EM69--	POLNILNIK USB PD 20W	89	OP28-	OKVIR PURE 4x2M	116			
EM50--	LED AMBIENTALNA ENOTA ENOBARVNA	90	OP13--	OKVIR PURE 1/3M	117			
EM51--	SVETILKA LED DVOBARVNA 250V~ 2x0,4W 2M	90	OP30--	OKVIR PURE 3M	117			
EM52--	SVETILKA LED 3D DVOBARVNA 250V~ 2x0,4W 2M	90	OP40-	OKVIR PURE 4M	117			
EM71--	STIKALO NA PRSTNI OTDIS BIOPASS 2M	91	OP70--	OKVIR PURE 7M	117			
EM82--	VEČOPRIVALNO ČASOVNO STIKALO EM82	92	OP23-	OKVIR PURE 2/3M	117			
EM90--	BRENČAČ 8VA 230V~ 1M	94	OKVIRJI EDGE OG					
EM91--	BRENČAČ 8VA 12V 1M	94	OG10-P	OKVIR EDGE 1/2M	120			
EM92--	ZVONEC 8VA 230V~ 1M	94	OG20-P	OKVIR EDGE 2M	120			
EM93--	ZVONEC 8VA 12V 1M	95	OG13-P	OKVIR EDGE 1/3M	121			
EM94--	ELEKTRONSKI ZVONEC 230V~ 6mA rms 1M	95	OG30-P	OKVIR EDGE 3M	121			
EM95--	REGULATOR GLASNOSTI ZA 100V AVUDIO LINIJO 35W 2M	96	OG40-P	OKVIR EDGE 4M	121			
EM96--	REGULATOR GLASNOSTI NIZKO OHMSKI 4-8 Ω 35W 2M	96	OG70-P	OKVIR EDGE 7M	121			
SETI CM								
CM10--	SET VTIČNIC 2x SCHUKO 2P+E 16A 250V~ 4M	97	OG23-P	OKVIR EDGE 2/3M	121			
CM11--	SET VTIČNIC 3x SCHUKO 2P+E 16A 250V~ 7M	97	OKVIRJI EDGE OG					
CM15	SET VEZNICKOV BARVNI 3x1,5mm² 1M	98	OG10-M	OKVIR EDGE 1/2M	123			
CM16	SET VEZNICKOV BARVNI 3x2,5mm² 2M	98	OG20-M	OKVIR EDGE 2M	123			
CM17	SET VIJAKOV 3,5x20	98	OG24-M	OKVIR EDGE 2x2M	123			
CM18	SET VIJAKOV 3,5x35	98	OG26-M	OKVIR EDGE 3x2M	123			
CM19	SET VIJAKOV 3,5x50	98	OG28-M	OKVIR EDGE 4x2M	123			
CM22--	SET ZA STIKALA Z NAPISNO PLOŠČICO IP44 2M	98	OG13-M	OKVIR EDGE 1/3M	124			
CM23--	SET ZA VTIČNICE Z NAPISNO PLOŠČICO IP44 2M	98	OG30-M	OKVIR EDGE 3M	124			
CM25--OL	KOPALNIŠKI SET 3x20A 250V~ 4M OL	98	OG40-M	OKVIR EDGE 4M	124			
CM25--OS	KOPALNIŠKI SET 3x20A 250V~ 4M OS	98	OG70-M	OKVIR EDGE 7M	124			
CM28--	SET ZA STIKALA IP44 2M	99	OG23-M	OKVIR EDGE 2/3M	124			
CM29--	SET ZA VTIČNICE IP44 2M	99	NOSILCI NM					
NM41	NOSILEC KOPALNIŠKI SET	99	NM10	NOSILEC S KREMPELJCI 1/2M	130			
OL41--	OKVIR LINE KOPALNIŠKI SET	99	NM11	NOSILEC BREZ VIJAKOV 1/2M	130			
OS41--	OKVIR SOFT KOPALNIŠKI SET	99	NM20	NOSILEC S KREMPELJCI 2M	130			
ANTIBAKTERIJSKI PROGRAM AW								
TM11AW	TIPKA 1M	101	NM21	NOSILEC BREZ VIJAKOV 2M	130			
TM11AWIN	TIPKA 1M IN	101	NM24	NOSILEC KOVINSKI S KREMPELJCI 2M	131			
TM12AW	TIPKA 2M	101	NM25	NOSILEC KOVINSKI BREZ VIJAKOV 2M	131			
TM12AWIN	TIPKA 2M IN	101	NM26	NOSILEC OJAČEN S KREMPELJCI 2M	131			
TM21AW	POLNILO 1M	101	NM27	NOSILEC OJAČEN BREZ VIJAKOV 2M	131			
TM22AW	POLNILO 2M	101	NM23	NOSILEC S KREMPELJCI 2/3M	131			
VM10AW	VTIČNICA SCHUKO+KS 2P+E 16A 250V~ 2M	102	NM30	NOSILEC Z VIJAKI 3M	132			
VM11AW	VTIČNICA SCHUKO+KS+POKROV 2P+E 16A 250V~ 2M	102	NM40	NOSILEC Z VIJAKI 4M	132			
VM20AW	VTIČNICA EURO+KS 2P 10A 250V~ 1M	102	NM70	NOSILEC Z VIJAKI 7M	132			
KM11AW	VTIČNICA TV KONČNA 1dB 1M	102	NM75	NOSILEC OJAČEN Z VIJAKI 7M	132			
KM35AW	ADAPTER KS 1M	102	NM72	NOSILEC Z VIJAKI 2x7M	132			
OS20AW	OKVIR SOFT 2M	103	NM32	NOSILEC Z VIJAKI 2/3M	133			
OS24AW	OKVIR SOFT 2x2M	103						
OS26AW	OKVIR SOFT 3x2M	103						
OS30AW	OKVIR SOFT 3M	103						
OS40AW	OKVIR SOFT 4M	103						
OS70AW	OKVIR SOFT 7M	103						

D O Z E

distribucija

šifra	opis izdelka	stran	šifra	opis izdelka	stran
OKROGLE DOZE			OHIŠJA CUBO IP20 AC		
DE10	DOZA OKROGLA ZA ZID SM60-01	136	AC11--	OHIŠJE NO CUBO Z DNOM IP20 1M	158
DE11	DOZA OKROGLA ZA ZID GLOBOKA SM60-06	136	AC21--	OHIŠJE NO CUBO Z DNOM IP20 2M	158
DE30	VEZNI ČLEN DOZE ZA ZID SM60-03	136	AC41--	OHIŠJE NO CUBO Z DNOM IP20 4M	158
DE31	VEZNI ČLEN DOZE ZA ZID SM60-04	136	AC61--	OHIŠJE NO CUBO Z DNOM IP20 6M	158
DE12	DOZA OKROGLA ZA ZID 65-46	137	OHIŠJA CUBO IP55 AQ		
DE13	DOZA OKROGLA ZA ZID 65-60	137	AQ20--	OHIŠJE NO CUBO IP55 2M	159
DE14	PODALJŠEK DOZE ZA ZID 65-46	137	AQ22--	OHIŠJE NO CUBO IP55 2x2M	159
DE32	VEZNI ČLEN DOZE ZA ZID 65-71	137	AQ30--	OHIŠJE NO CUBO IP55 3M	159
DE33	VEZNI ČLEN DOZE ZA ZID 65-91	137	AQ21--	OHIŠJE PO CUBO IP55 2M	160
DE20	POKROV DOZE ZAŠČITNI 60	137	AQ31--	OHIŠJE PO CUBO IP55 3M	160
DE21	POKROV DOZE ZAŠČITNI 65	137	PARAPETNI KANALI ALUMINIJSKI MA		
DE22	POKROV DOZE DEKORATIVNI SM60	137	RT10	ADAPTER MA 92	161
HE10	DOZA OKROGLA ZA VOTLE STENE SM68x40	140	RT12--	OKVIR MA 92 2/3M	161
HE11	DOZA OKROGLA ZA VOTLE STENE SM68x55	140	RT14--	OKVIR MA 92 4M	161
BE10	DOZA OKROGLA ZA BETON 60-49	140	RT17--	OKVIR MA 92 7M	161
BE11	DOZA OKROGLA ZA BETON 60-77	140	RT20--	OSNOVA KANALA MA 130x65	162
BE20	NOSILEC DOZE ZA BETON	140	RT21--	OSNOVA KANALA MA 165x65	162
BE21	UVODNICA DOZE ZA BETON 16	140	RT25--	POKROV KANALA MA 92	162
PRAVOKOTNE DOZE			RT30	PREGRADA MA 43	162
DM30	DOZA PRAVOKOTNA ZA ZID PM3	144	RT31	PREGRADA MA 43 AL	162
DM31	DOZA PRAVOKOTNA ZA ZID PM3-65	144	RT32	PREGRADA MA 43 AL DVOJNA	162
DM40	DOZA PRAVOKOTNA ZA ZID PM4	144	RT35--	KONČNI ELEMENT MA 130x65	163
DM41	DOZA PRAVOKOTNA ZA ZID PM4-65	144	RT36--	KONČNI ELEMENT MA 165x65	163
DM70	DOZA PRAVOKOTNA ZA ZID PM7	145	RT38	SET RAVNI VEZNI ELEMENT MA 65	163
DM71	DOZA PRAVOKOTNA ZA ZID PM7-65	145	RT40--	UNIVERZALNI KOT MA 130x65	163
DM72	DOZA PRAVOKOTNA ZA ZID PM72-65	145	RT41--	UNIVERZALNI KOT MA 165x65	163
DM80	VEZNI ČLEN DOZE PM	145	RT42	OZEMLJITVENA SPOANKA MA 2x A6.3	163
DM33	POKROV DOZE ZAŠČITNI PM3	146	RT43--	L KOTNI ELEMENT MA 130x65 / 130	163
DM34	POKROV DOZE DEKORATIVNI PM3	146	RT44--	L KOTNI ELEMENT MA 165x65 / 130	164
DM43	POKROV DOZE ZAŠČITNI PM4	146	RT47--	L KOTNI ELEMENT MA 165x65 / 165	164
DM44	POKROV DOZE DEKORATIVNI PM4	146	RT45--	T ELEMENT MA 130x65 / 130	164
DM73	POKROV DOZE ZAŠČITNI PM7	146	RT46--	T ELEMENT MA 165x65 / 130	164
DM74	POKROV DOZE DEKORATIVNI PM7	146	RT48--	T ELEMENT MA 165x65 / 165	164
DM75	POKROV DOZE DEKORATIVNI PM72	147	RT50--	NOSILEC STEBRIČKA MA ENOJNI 130x65 / 130	165
HM30	DOZA PRAVOKOTNA ZA VOTLE STENE VM3	148	RT51--	NOSILEC STEBRIČKA MA DVOJNI 130x65	165
HM40	DOZA PRAVOKOTNA ZA VOTLE STENE VM4	148	RT52--	STEBRIČEK MA 130x65x500	165
HM70	DOZA PRAVOKOTNA ZA VOTLE STENE VM7	148	RT53--	STEBRIČEK MA DVOJNI 130x65x500	165
HM72	DOZA PRAVOKOTNA ZA VOTLE STENE VM72	148	TALNE DOZE MT		
BM30	DOZA PRAVOKOTNA ZA BETON BM3	149	RB50	VGRADNO OHIŠJE TALNE DOZE 4M	167
BM40	DOZA PRAVOKOTNA ZA BETON BM4	149	RB60	VLOŽEK TALNE DOZE 4M	167
BM70	DOZA PRAVOKOTNA ZA BETON BM7	149	RB65S1	POKROV TALNE DOZE 4M	167
BM80	PRITRDILNI ČLEN DOZ BM	149	RB51	VGRADNO OHIŠJE TALNE DOZE 7M	167
BM82	DISTANČNI PROFIL ZA DOZE	149	RB61	VLOŽEK TALNE DOZE 7M	167
RAZVODNE DOZE			RB66S1	POKROV TALNE DOZE 7M	167
DW10	RAZVODNA DOZA OKROGLA ZA ZID DSM78	152	RB52	VGRADNO OHIŠJE TALNE DOZE 2X7M	168
HW10	RAZVODNA DOZA OKROGLA ZA VOTLE STENE SM78x45	152	RB62	VLOŽEK TALNE DOZE 2X7M	168
DE23	POKROV DOZE DEKORATIVNI SM78	152	RB67S2	POKROV TALNE DOZE 2X7M	168
DE24	POKROV DOZE ZAŠČITNI 78	152	RB53	VGRADNO OHIŠJE TALNE DOZE 4X7M	168
HW20	RAZVODNA DOZA KVADRATNA ZA VOTLE STENE SM105x105	152	RB62	VLOŽEK TALNE DOZE 2X7M	168
PRIBOR ZA OŽIČENJE			RB68S2	POKROV TALNE DOZE 4X7M	168
UW10--	ENOREDNE SPOanke ZAPRTE PC 2x2.5mm ² 10P	154	RB55S1	TALNA DOZA ZA DVOJNA TLA S POKROVOM 4M	169
UW11--	ENOREDNE SPOanke ZAPRTE PC 2x4mm ² 10P	154	RB60	VLOŽEK TALNE DOZE 4M	169
UW12--	ENOREDNE SPOanke ZAPRTE PC 2x6mm ² 10P	154	RB56S1	TALNA DOZA ZA DVOJNA TLA S POKROVOM 7M	170
UW15--	ENOREDNE SPOanke PA 2x2.5mm ² 12P	154	RB61	VLOŽEK TALNE DOZE 7M	170
UW16--	ENOREDNE SPOanke PA 2x4mm ² 12P	154	RB57S2	TALNA DOZA ZA DVOJNA TLA S POKROVOM 2X7M	170
UW17--	ENOREDNE SPOanke PA 2x6mm ² 12P	154	RB62	VLOŽEK TALNE DOZE 2X7M	170
UW29--	DVOREDNE SPOanke PP 1.0-4.0mm ² 12P	154	RB58S2	TALNA DOZA ZA DVOJNA TLA S POKROVOM 4X7M	170
UW30--	DVOREDNE SPOanke PP 1.5-6.0mm ² 12P	154	RB62	VLOŽEK TALNE DOZE 2X7M	170
UW31--	DVOREDNE SPOanke PP 2.5-10mm ² 12P	154	RB10	ADAPTER ZA DIN LETEV 35mm 1M	171
UW32--	DVOREDNE SPOanke PP 4.0-16mm ² 12P	154	RB11	ADAPTER ZA DIN LETEV 35mm 2M	171
UW27--	DVOREDNE SPOanke PA 2.5-10mm ² 12P	155			171
UW28--	DVOREDNE SPOanke PA 4.0-16mm ² 12P	155			
UW40--	BREZVIJAČNE SPOanke PA 1.5mm ² 3P	155			
UW41--	BREZVIJAČNE SPOanke PA 1.5mm ² 5P	155			
UW42--	BREZVIJAČNE SPOanke PA 1.5mm ² 8P	155			
UW45--	BREZVIJAČNE SPOanke PA 2.5mm ² 3P	155			
UW46--	BREZVIJAČNE SPOanke PA 2.5mm ² 4P	155			
UW47--	BREZVIJAČNE SPOanke PA 2.5mm ² 5P	155			
UW50--	BREZVIJAČNE SPOanke PA 2.5mm ² 2/1P	155			

šifra	opis izdelka	stran	šifra	opis izdelka	stran																																													
STIKALA SQ			PRIBOR PQ																																															
SQ10-XO	STIKALO ENOPOLNO 10AX 250V~	192	PQ10-XO	POLNILO	213																																													
SQ10-INXO	STIKALO ENOPOLNO 10AX 250V~ __ IN	192	PQ30-	POKROV TAE/TDO	213																																													
SQ11-XO	TIPKALO ENOPOLNO 10A 250V~	192	PQ20PWF	OHIŠJE NADOMETNO 1	214																																													
SQ11-IN01XO	TIPKALO ENOPOLNO 10A 250V~ __ IN 01	192	PQ21PWF	OHIŠJE NADOMETNO ZA DVOJNO VTIČNICO	214																																													
SQ11-IN02XO	TIPKALO ENOPOLNO 10A 250V~ __ IN 02	193	PQ22-F	SET ZA STIKALA FLAT IP44	215																																													
SQ11-ILXO	TIPKALO ENOPOLNO 10A 250V~ __ IL	193	PQ23-F	SET ZA VTIČNICE FLAT IP44	215																																													
SQ22-IN03XO	STIKALO DVOPOLNO 16AX 250V~ __ IN 03	193	OKVIRJI OF																																															
SQ50-XO	STIKALO SERIJSKO 10AX 250V~	193	OF10--	OKVIR FLAT 1	216																																													
SQ51-XO	TIPKALO SERIJSKO 10A 250V~	193	OF20--	OKVIR FLAT 2	216																																													
SQ52-NT09XO	STIKALO ŽALUZIJSKO 10AX 250V~ __ NT 09	193	OF30--	OKVIR FLAT 3	217																																													
SQ53-NT09XO	TIPKALO ŽALUZIJSKO 10A 250V~ __ NT 09	194	OF40--	OKVIR FLAT 4	217																																													
SQ60-XO	STIKALO MENJALNO 10AX 250V~	194	OF50--	OKVIR FLAT 5	217																																													
SQ60-INXO	STIKALO MENJALNO 10AX 250V~ __ IN	194	OKVIRJI OQ																																															
SQ60-IN02XO	STIKALO MENJALNO 10AX 250V~ __ IN02	194	OQ10--	OKVIR BOLD 1	218																																													
SQ63-XO	STIKALO DVOJNO MENJALNO 10AX 250V~	195	OQ20--	OKVIR BOLD 2	218																																													
SQ70-XO	STIKALO KRIŽNO 10AX 250V~	195	OQ30--	OKVIR BOLD 3	219																																													
SIGNALIZACIJA IA			OQ40--	OKVIR BOLD 4	219																																													
IA10--	TLIVKA 230V~ 0,34W	196	OQ50--	OKVIR BOLD 5	219																																													
IA20--	LED SIGNALIZACIJA 230V~ AC/DC 0,4W	196	OKVIRJI OR																																															
IA21--	LED SIGNALIZACIJA 24V AC/DC 0,2W	196	OR10--	OKVIR PRIME 1	220																																													
IA22--	LED SIGNALIZACIJA 12V AC/DC 0,1W	196	OR20--	OKVIR PRIME 2	220																																													
VTIČNICE VQ			OR30--	OKVIR PRIME 3	221																																													
VQ10-XO	VTIČNICA SCHUKO 2P+E 16A 250V~ __ XO	199	OR40--	OKVIR PRIME 4	221																																													
VQ11-XO	VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~ __ XO	199	KOMUNIKACIJE KQ																																															
VQ12-XO	VTIČNICA SCHUKO 2P+E 16A 250V~ BV __ XO	199	KQ10-XO	VTIČNICA TV OSNOVNA 0dB	202																																													
VQ13-XO	VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~ BV __ XO	199	KQ11-XO	VTIČNICA TV-R KONČNA 1dB	202																																													
VQ40-XO	VTIČNICA FRANCOSKA 2P+E 16A 250V~ __ XO	200	KQ12-XO	VTIČNICA TV-R PREHODNA 10dB	203																																													
VQ41-XO	VTIČNICA FRANCOSKA+POKROV 2P+E 16A 250V~ __ XO	200	KQ16-XO	VTIČNICA SAT-TV-R KONČNA 3dB	203																																													
VQ16--	VTIČNICA SCHUKO DVOJNA 2P+E 16A 250V~	200	KQ22-XO	VTIČNICA AVUDIO 2xRCA	203																																													
VQ42--XO	VTIČNICA FRANCOSKA 2P+E 16A 250V~ BV __ XO	201	KQ23-XO	VTIČNICA AVUDIO ZVOČNIŠKA	204																																													
VQ43-XO	VTIČNICA FRANCOSKA+POKROV 2P+E 16A 250V~ BV __ XO	201	KQ36-XO	VTIČNICA TEL KS RJ11 6/4	204																																													
VQ46--	VTIČNICA FRANCOSKA DVOJNA 2P+E 16A 250V~	201	KQ37-XO	VTIČNICA CAT5e KS RJ45 8/8	204																																													
VQ46-F	VTIČNICA FRANCOSKA DVOJNA 2P+E 16A 250V~	201	KQ38-XO	VTIČNICA TEL KS DVOJNA 2x RJ11 6/4	204																																													
ELEKTRONIKA EQ			KQ39-XO	VTIČNICA CAT5e KS DVOJNA 2x RJ45 8/8	205																																													
EQ15-XO	ZATEMNILNIK ROTACIJSKI MEN RL 400W	206	KQ35-XO	VTIČNICA TEL LT RJ11 6/4	205																																													
EQ16-XO	ZATEMNILNIK ROTACIJSKI MEN RLC 400W	206	KQ40-XO	VTIČNICA CAT6s KS RJ45 8/8 SLIM	205																																													
EQ19-XO	ZATEMNILNIK ROTACIJSKI MEN LED 100W	206	KQ41-XO	VTIČNICA CAT6s KS DVOJNA 2x RJ45 8/8 SLIM	205																																													
EM17	KRMILNI MODUL MZC za EM18	208	ELEKTRONIKA EQ																																															
EM18	ZATEMNILNIK VGRADNI LED 250W	208	EM19	ZATEMNILNIK VGRADNI DC LED 96W	209	EQ15-XO	ZATEMNILNIK ROTACIJSKI MEN RL 400W	206	EQ32-XO	IR STIKALO 5A 230V~	210	EQ16-XO	ZATEMNILNIK ROTACIJSKI MEN RLC 400W	206	EQ35-XO	TERMOSTAT OGREVANJE 10A 230V~	210	EQ19-XO	ZATEMNILNIK ROTACIJSKI MEN LED 100W	206	EQ36-XO	TERMOSTAT OGREVANJE / HLAJENJE 5A 230V~	210	EM17	KRMILNI MODUL MZC za EM18	208	EQ37-XO	TERMOSTAT TALNO OGREVANJE 16A 230V~	211	EM18	ZATEMNILNIK VGRADNI LED 250W	208	EQ01-XO	PODOMETNI RADIO + ZVOČNIK DAB BLUETOOTH	211	EM19	ZATEMNILNIK VGRADNI DC LED 96W	209	EQ02-XO	PODOMETNI ZVOČNIK	211	EQ32-XO	IR STIKALO 5A 230V~	210	EQ69-XO	POLNILNIK USB PD 20W	212	EQ35-XO	TERMOSTAT OGREVANJE 10A 230V~	210
EM19	ZATEMNILNIK VGRADNI DC LED 96W	209	EQ15-XO	ZATEMNILNIK ROTACIJSKI MEN RL 400W	206																																													
EQ32-XO	IR STIKALO 5A 230V~	210	EQ16-XO	ZATEMNILNIK ROTACIJSKI MEN RLC 400W	206																																													
EQ35-XO	TERMOSTAT OGREVANJE 10A 230V~	210	EQ19-XO	ZATEMNILNIK ROTACIJSKI MEN LED 100W	206																																													
EQ36-XO	TERMOSTAT OGREVANJE / HLAJENJE 5A 230V~	210	EM17	KRMILNI MODUL MZC za EM18	208																																													
EQ37-XO	TERMOSTAT TALNO OGREVANJE 16A 230V~	211	EM18	ZATEMNILNIK VGRADNI LED 250W	208																																													
EQ01-XO	PODOMETNI RADIO + ZVOČNIK DAB BLUETOOTH	211	EM19	ZATEMNILNIK VGRADNI DC LED 96W	209																																													
EQ02-XO	PODOMETNI ZVOČNIK	211	EQ32-XO	IR STIKALO 5A 230V~	210																																													
EQ69-XO	POLNILNIK USB PD 20W	212	EQ35-XO	TERMOSTAT OGREVANJE 10A 230V~	210																																													

ekonomik

šifra	opis izdelka	stran
STIKALA SE		
SE10	STIKALO ENOPOLNO 10AX 250V~	232
SE11	TIPKALO ENOPOLNO 10A 250V~	232
SE22	STIKALO DVOPOLNO 16AX 250V~	232
SE50	STIKALO SERIJSKO 10AX 250V~	232
SE51	TIPKALO SERIJSKO 10A 250V~	233
SE52	STIKALO ŽALUZIJSKO 10AX 250V~	233
SE53	TIPKALO ŽALUZIJSKO 10A 250V~	233
SE60	STIKALO MENJALNO 10AX 250V~	233
SE63	STIKALO DVOJNO MENJALNO 10AX 250V~	233
SE70	STIKALO KRIŽNO 10AX 250V~	233
SE10--	STIKALO ENOPOLNO 10AX 250V~	234
SE10--IN	STIKALO ENOPOLNO 10AX 250V~ IN	234
SE11--	TIPKALO ENOPOLNO 10A 250V~	234
SE11--T150	TIPKALO ENOPOLNO 10A 250V~ TI 50	234
SE11--T151	TIPKALO ENOPOLNO 10A 250V~ TI 51	234
SE11--IL	TIPKALO ENOPOLNO 10A 250V~ IL	234
SE22--IN03	STIKALO DVOPOLNO 16AX 250V~ IN 03	234
SE50--	STIKALO SERIJSKO 10AX 250V~	235
SE51--	TIPKALO SERIJSKO 10A 250V~	235
SE52--NT09	STIKALO ŽALUZIJSKO 10AX 250V~ NT 09	235
SE53--NT09	TIPKALO ŽALUZIJSKO 10A 250V~ NT 09	235
SE60--	STIKALO MENJALNO 10AX 250V~	235
SE63--	STIKALO DVOJNO MENJALNO 10AX 250V~	235
SE70--	STIKALO KRIŽNO 10AX 250V~	235
TIPKE TE		
TE10--	TIPKA NAVADNA	236
TE10--IN	TIPKA INDIKATOR	236
TE13--IL	TIPKA Z NAPISNO PLOŠČICO IL	236
TE11--	TIPKA SERIJSKA	236
SIGNALIZACIJA IA		
IA10--	TLIVKA 230V~ 0,34W	237
IA20--	LED SIGNALIZACIJA 230V~ AC/DC 0,4W	237
IA21--	LED SIGNALIZACIJA 24V AC/DC 0,2W	237
IA22--	LED SIGNALIZACIJA 12V AC/DC 0,1W	237
VTIČNICE VE		
VE10-XO	VTIČNICA SCHUKO 2P+E 16A 250V~ XO	240
VE11-XO	VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~ XO	240
VE12-XO	VTIČNICA SCHUKO 2P+E 16A 250V~ BV XO	240
VE13-XO	VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~ BV XO	240
VE10--	VTIČNICA SCHUKO 2P+E 16A 250V~	240
VE11--	VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~	240
VE12--	VTIČNICA SCHUKO 2P+E 16A 250V~ BV	240
VE13--	VTIČNICA SCHUKO+POKROV 2P+E 16A 250V~ BV	240
VE40--XO	VTIČNICA FRANCOSKA 2P+E 16A 250V~ XO	241
VE41--XO	VTIČNICA FRANCOSKA+POKROV 2P+E 16A 250V~ XO	241
VE42--XO	VTIČNICA FRANCOSKA 2P+E 16A 250V~ BV XO	241
VE43--XO	VTIČNICA FRANCOSKA+POKROV 2P+E 16A 250V~ BV XO	241
VE40--	VTIČNICA FRANCOSKA 2P+E 16A 250V~	241
VE41--	VTIČNICA FRANCOSKA+POKROV 2P+E 16A 250V~	241
VE42--	VTIČNICA FRANCOSKA 2P+E 16A 250V~ BV	241
VE43--	VTIČNICA FRANCOSKA+KS+POKROV 2P+E 16A 250V~ BV	241
VE16--	VTIČNICA SCHUKO DVOJNA 2P+E 16A 250V~	242
VE46--	VTIČNICA FRANCOSKA DVOJNA 2P+E 16A 250V~	242
VE30--	VTIČNICA 2P 16A 250V~	242
KOMUNIKACIJE KE		
KE11	VTIČNICA TV-R KONČNA 1dB	243
KE12	VTIČNICA TV-R PREHODNA 10dB	243
KE16	VTIČNICA SAT-TV-R KONČNA 3dB	243
KE36	VTIČNICA TEL KS RJ11 6/4	243
KE37	VTIČNICA CAT5e KS RJ45 8/8	244
KE40	VTIČNICA CAT6s KS RJ45 8/8 SLIM	244
KE38	VTIČNICA TEL KS DVOJNA 2x RJ11 6/4	244
KE39	VTIČNICA CAT5e KS DVOJNA 2x RJ45 8/8	244
KE41	VTIČNICA CAT6s KS DVOJNA 2x RJ45 8/8 SLIM	244
KE45	ADAPTER KS ENOJNI	244
KE46	ADAPTER KS DVOJNI	245
KE47	ADAPTER PD DVOJNI	245
KE10--	VTIČNICA TV OSNOVNA 0dB	246
KE11--	VTIČNICA TV-R KONČNA 1dB	246
KE12--	VTIČNICA TV-R PREHODNA 10dB	246
KE16--	VTIČNICA SAT-TV-R KONČNA 3dB	246
KE22--	VTIČNICA AVDIO 2xRCA	246
KE23--	VTIČNICA AVDIO ZVOČNIŠKA	246
KE36--	VTIČNICA TEL KS RJ11 6/4	246
KE37--	VTIČNICA CAT5e KS RJ45 8/8	247
KE40--	VTIČNICA CAT6s KS RJ45 8/8 SLIM	247
KE38--	VTIČNICA TEL KS DVOJNA 2x RJ11 6/4	247
KE39--	VTIČNICA CAT5e KS DVOJNA 2x RJ45 8/8	247
KE41--	VTIČNICA CAT6s KS DVOJNA 2x RJ45 8/8 SLIM	247
KE35--	VTIČNICA TEL LT RJ11 6/4	247

šifra	opis izdelka	stran
POKROVI PE		
PE10--	POKROV TV-R 2P/3P	248
PE20--	POKROV KS ENOJNI	248
PE21--	POKROV KS DVOJNI	248
PE30--	POKROV TAE/TDO	248
ELEKTRONIKA EE		
EE15	ZATEMNILNIK ROTACIJSKI MEN RL 400W	249
EE16	ZATEMNILNIK ROTACIJSKI MEN RLC 400W	249
EE19	ZATEMNILNIK ROTACIJSKI MEN LED 100W	250
EE32	IR STIKALO 5A 230V~	250
EE15--	ZATEMNILNIK ROTACIJSKI MEN RL 400W	251
EE16--	ZATEMNILNIK ROTACIJSKI MEN RLC 400W	251
EE19--	ZATEMNILNIK ROTACIJSKI MEN LED 100W	251
EE32--	IR STIKALO 5A 230V~	251
EE69--	POLNILNIK USB PD 20W	252
POKROVI ELEKTRONIKE PE		
PE41--	POKROV ZATEMNILNO STIKALO Ø6	254
PE32--	POKROV IR STIKALO	254
PRIBOR AE		
AE10--	POLNITO	255
AE20--	PRIKLJUČEK PETPOLNI STALNI 3P+N+E 5x4mm ²	255
AE30--	OHIŠJE NADOMETNO 1	255
AE31--	OHIŠJE NADOMETNO ZA DVOJNO VTIČNICO EKONOMIK	255
AE50--	STENSKI ŠČITNIK	256
AE51--	OTROŠKA ZAŠČITA KS	256
OKVIRJI OE		
OE10--	OKVIR EKONOMIK 1	257
OE20--	OKVIR EKONOMIK 2 HORIZONTALNI	257
OE21--	OKVIR EKONOMIK 2 VERTIKALNI	257
OE30--	OKVIR EKONOMIK 3 HORIZONTALNI	257
OE31--	OKVIR EKONOMIK 3 VERTIKALNI	258
OE40--	OKVIR EKONOMIK 4 HORIZONTALNI	258
OE41--	OKVIR EKONOMIK 4 VERTIKALNI	258
OE50--	OKVIR EKONOMIK 5 HORIZONTALNI	258
OE90--	DEKORATIVNI OKVIRČKI COLOR	259
fontana		
šifra	opis izdelka	stran
STIKALA SF		
SF10--	STIKALO ENOPOLNO IP44 10AX 250V~	262
SF10--TI	STIKALO ENOPOLNO IP44 10AX 250V~ TI	262
SF11--TI	TIPKALO ENOPOLNO IP44 10A 250V~ TI	262
SF20--	STIKALO DVOPOLNO IP44 10AX 250V~	262
SF50--	STIKALO SERIJSKO IP44 10AX 250V~	263
SF51--	TIPKALO SERIJSKO IP44 10A 250V~	263
SF60--	STIKALO MENJALNO IP44 10AX 250V~	263
SF60--TI	STIKALO MENJALNO IP44 10AX 250V~ TI	263
SF63--	STIKALO DVOJNO MENJALNO 10AX 250V~	263
SF70--	STIKALO KRIŽNO IP44 10AX 250V~	263
VTIČNICE VF		
VF10--	VTIČNICA SCHUKO+POKROV IP44 2P+E 16A 250V~	264
VF12--	VTIČNICA SCHUKO+POKROV IP44 2P+E 16A 250V~ BV	264
SETI CF		
CF10--	SET VTIČNICA SCHUKO DVOJNI HORIZONTALNI	
	IP44 2x2P+E 16A 250V~	265
CF11--	SET VTIČNICA SCHUKO DVOJNI VERTIKALNI	
	IP44 2x2P+E 16A 250V~	265
CF12--	SET VTIČNICA SCHUKO DVOJNI HORIZONTALNI	
	IP44 16A + 10AX 250V~	265
CF13--	SET VTIČNICA SCHUKO DVOJNI VERTIKALNI	
	IP44 16A + 10AX 250V~	266
CF14--	SET VTIČNICA SCHUKO DVOJNI HORIZONTALNI	
	IP44 2x2P+E 16A 250V~BV	266
CF15--	SET VTIČNICA SCHUKO DVOJNI VERTIKALNI	
	IP44 2x2P+E 16A 250V~BV	266
CF16--	SET VTIČNICA SCHUKO DVOJNI HORIZONTALNI	
	IP44 16A + 10AX 250V~BV	266
CF17--	SET VTIČNICA SCHUKO DVOJNI VERTIKALNI	
	IP44 16A + 10AX 250V~BV	266
PRIBOR AF		
AF10--	RAZVODNICA IP44 RN01	267
AF20--	RAZVODNICA IP55 ND01	267





TEM

TEM ČATEŽ d.o.o.
Čatež 13, 8212 VELIKA LOKA
SLOVENIJA
tem@tem.si
www.tem.si

T +386(0)7 348 99 00

